
**PRODUCT DATA SHEET**
**C11744**

**4-Port Dual Directional Coupler** employs two, 3-Port Uni-Directional Couplers, internally connected, in tandem, providing measurement of both forward and reverse power. Ideal for simultaneously monitoring a system's forward and reverse power and for reflectometer measurements. Unlike the Bi-Directional Coupler, the directivity of the Dual Directional Coupler is unaffected by the loads on the coupled ports.

**Features:**

High Power      Wide Bandwidths      Small Size      Flat Coupling      Custom Designs Available

**Electrical Specifications:**

Frequency:	20 - 2600 MHz
Power:	200 W CW (20-500 MHz), 150 W CW (500-1000 MHz), 50 W CW (1000-2600 MHz)
Coupling:	40 ± 1.0 dB Max.
Insertion Loss:	0.5 dB Max.
Flatness:	± 1.0 dB Max.
VSWR (ML):	1.30:1 Max.
Directivity:	18 dB Min.

**Mechanical Specifications:**

Type:	Connectorized
Material:	Aluminum 6061-T6
Surface Finish:	Chem. Film Per MIL-DTL-5541F Type II Class 3 (Clear Iridite) RoHS Compliant Available
Operating Temperature:	-55°C to +75°C
Storage Temperature:	-60°C to +85°C
Humidity:	95% Non-Condensing
Size:	1.76 x 1.16 x 0.565"


**Connector Configurations:**

Model	Input (J1)	Output (J2)	Fwd (J3)	Rev (J4)
C11744-102	SMA	SMA	SMA	SMA

**Werlatone®** Broadband Dual, Uni, and Bi Directional RF Couplers are designed to tolerate the most stringent operating conditions associated with military and EMC testing environments. Many of our RF Directional Couplers, designated Mismatch Tolerant®, will operate continuously, at rated power, into a severe load mismatch condition. Our multi-octave Directional Couplers maintain exceptional coupling flatness, directivity, VSWR, and insertion loss.

RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION  
This document contains proprietary information which is the sole property of Werlatone, Inc.

REVISION HISTORY			
REV	REVISION RECORD	DATE	APPROVED
-	INITIAL RELEASE	7/23/10	BW
A	ECN 5268	12/10/10	BW

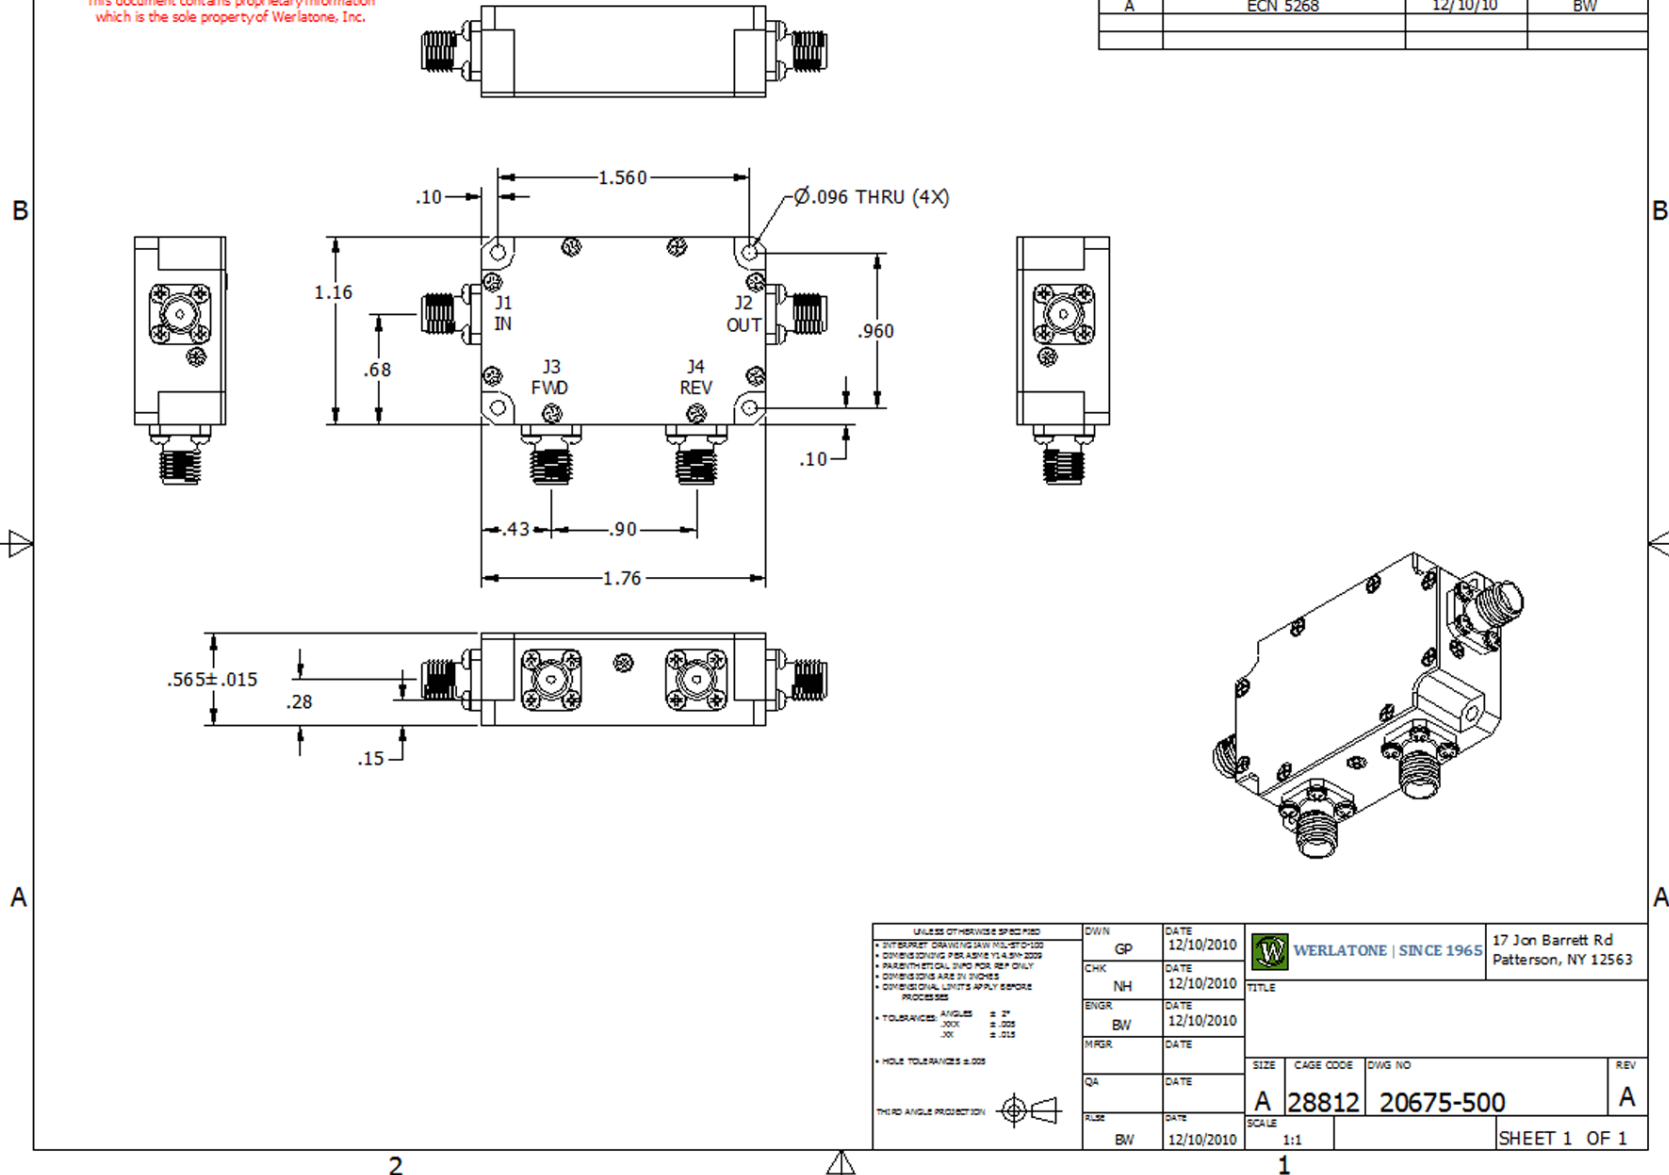

UNLESS OTHERWISE SPECIFIED		DWN	GP	DATE	12/10/2010	<b>WERLATONE   SINCE 1965</b> 17 Jon Barrett Rd Patterson, NY 12563	
• DWT BARRETT DRAWING (AWI) MFG 01/10/10 • DIMENSIONS UNLESS OTHERWISE SPECIFIED ARE IN INCHES • DIMENSIONS ARE TO CENTER UNLESS OTHERWISE SPECIFIED • DIMENSIONAL LIMITS APPLY BEFORE FINISHING OPERATIONS • TOLERANCES: ANGLES ± .01 .0001 ± .005 .001 ± .015 • HOLE TOLERANCES ± .005		CHK	NH	DATE	12/10/2010		
THIRD ANGLE PROJECTION		ENGR	BW	DATE	12/10/2010	TITLE	
		MRGR		DATE		SIZE	A
		QA		DATE		CAGE CODE	20675-500
		FILE	BW	DATE	12/10/2010	DWG NO	20675-500
						SCALE	1:1
						REV	A
						SHEET 1 OF 1	

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.  
Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com