

PRODUCT DATA SHEET

C6020

4-Port Dual Directional Coupler employs two, 3-Port Uni-Directional Couplers, internally connected, in tandem, providing measurement of both forward and reverse power. Ideal for simultaneously monitoring a system's forward and reverse power and for reflectometer measurements. Unlike the Bi-Directional Coupler, the directivity of the Dual Directional Coupler is unaffected by the loads on the coupled ports.

Features:

High Power

Wide Bandwidths

Small Size

Flat Coupling

Custom Designs Available

Electrical Specifications:

Frequency:	0.01 - 400 MHz
Power:	400 W CW
Coupling:	40 \pm 1.0 dB Max.
Insertion Loss:	0.5 dB Max.
Flatness:	\pm 0.5 dB Max.
VSWR (ML):	1.30:1 Max.
Directivity:	20 dB Min.

Mechanical Specifications:

Type:	Connectorized
Material:	Aluminum 6061-T6
Surface Finish:	Chem. Film Per MIL-DTL-5541F
	Type I Class 3 (Yellow Iridite)
	RoHS Compliant Available
Operating Temperature:	-55°C to +75°C
Storage Temperature:	-60°C to +85°C
Humidity:	95% Non-Condensing
Size:	5.2 x 2.28 x 1.69"

Connector Configurations:

Model	Input (J1)	Output (J2)	Fwd (J3)	Rev (J4)
C6020-10	N Female	N Female	N Female	N Female
C6020-12	N Female	N Female	SMA	SMA
C6020-13	N Female	N Female	BNC	BNC
C6020-714	N Male	N Female	N Female	N Female

Werlatone® Broadband Dual, Uni, and Bi Directional RF Couplers are designed to tolerate the most stringent operating conditions associated with military and EMC testing environments. Many of our RF Directional Couplers, designated Mismatch Tolerant®, will operate continuously, at rated power, into a severe load mismatch condition. Our multi-octave Directional Couplers maintain exceptional coupling flatness, directivity, VSWR, and insertion loss.

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.


Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com



WERLATONE

Model C6020

Connectorized Directional Couplers

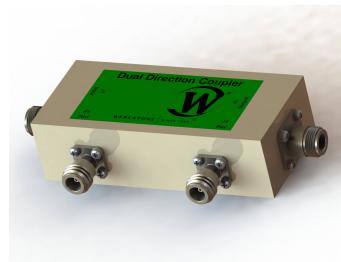


PRODUCT DATA SHEET


C6020

Performance Data (Specifications subject to change without notice):


Coupling:

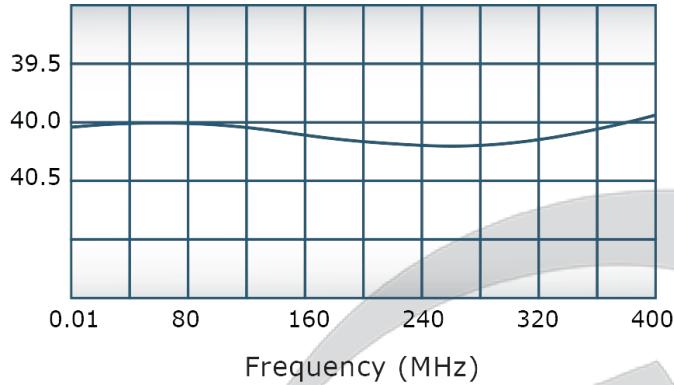


VSWR:

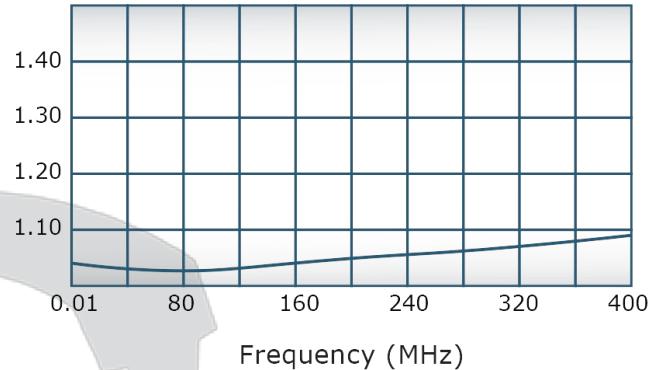

Insertion Loss:

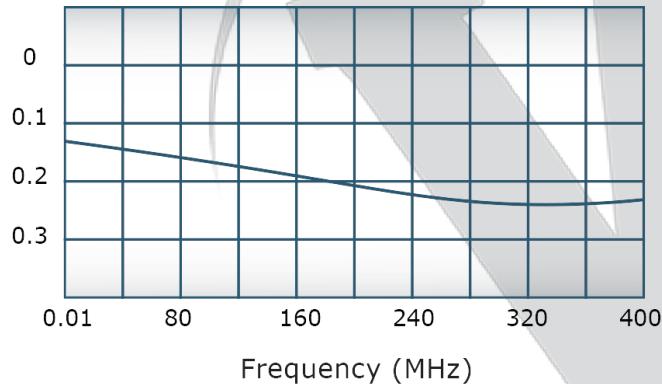

Directivity:

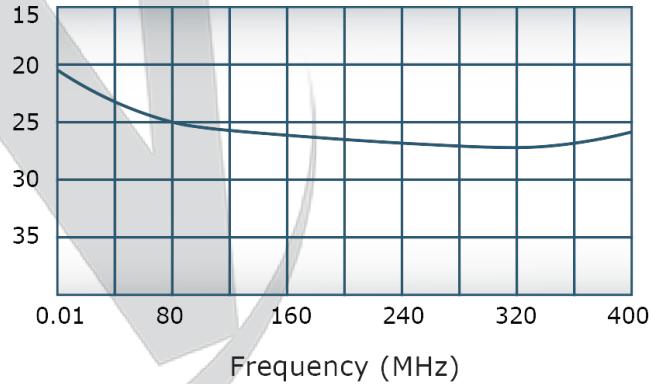

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

4

3


2

1

**RESTRICTION ON USE, DUPLICATION OR
DISCLOSURE OF PROPRIETARY INFORMATION**

This document contains proprietary information
which is the sole property of Werlatone, Inc.

0.27 [6.9] 0.53 [13.3] 4.15 [105.4] 1.19 [30.2]

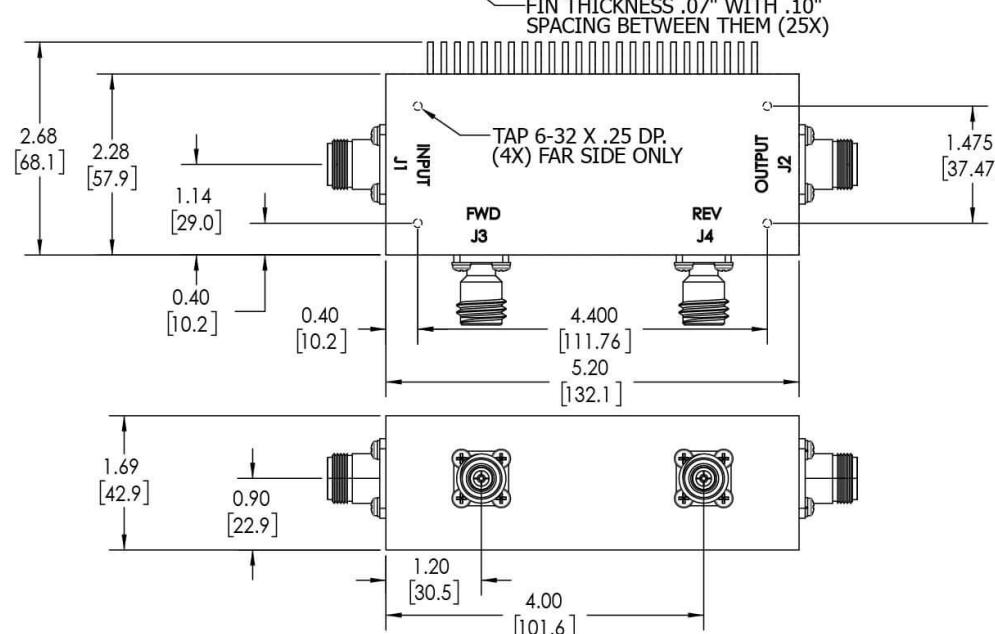

REVISION HISTORY

REV.	REVISION RECORD	DATE	APPROVED
A	ECN 9696	11/28/18	RB

NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL: ALUMINUM 6061-T6
2. FINISH: CHEM FILM PER MIL-DTL-5541F TYPE I CLASS 3 (YELLOW IRIDITE)
3. CONNECTORS:
J1, J2: N FEMALE
J3, J4: N FEMALE

		UNLESS OTHERWISE SPECIFIED	DN	DATE		
		INTERPRET DRAWING AS MIL-STD-100 UNLESS OTHERWISE SPECIFIED AS MIL-AS-7145M-2009	SD	DATE		
		PARENTHETICAL TEXT FOR REFERENCE ONLY	CHK	DATE		
		DIMENSIONAL LIMITS ARE IN INCHES	CS	DATE		
		TOLERANCES	ENGR	DATE		
		ANGLES $\pm 2^\circ$ 3 RL $\pm .005$ [1.27] 2 RL $\pm .012$ [3.05]	CS	DATE		
		REMOVE ALL BURRS AND SHARP EDGES R.01 MAX	MFGR	DATE		
		CONCENTRICITY MACHINED DIA. .002 FIM	QA	DATE		
		MACHINE TOOL MISMATCH .003 MAX	RELEASE	DATE	SCALE	REV
NEXT ASSY	USED ON	APPLICATION			1:1.5	
		THIRD ANGLE PROJECTION				



WERLATONE SINCE 1965

17 Jon Barrett Rd
Patterson, NY 12563

OUTLINE

SIZE CAGE CODE DWG NO.

B 10407-505

A

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com