
PRODUCT DATA SHEET
C10965

4-Port Dual Directional Coupler employs two, 3-Port Uni-Directional Couplers, internally connected, in tandem, providing measurement of both forward and reverse power. Ideal for simultaneously monitoring a system's forward and reverse power and for reflectometer measurements. Unlike the Bi-Directional Coupler, the directivity of the Dual Directional Coupler is unaffected by the loads on the coupled ports.

Features:

High Power Wide Bandwidths Small Size Flat Coupling Custom Designs Available

Electrical Specifications:

Frequency: 1000 - 2500 MHz
 Power: 250 W CW
 Coupling: 40 ± 1.0 dB Max.
 Insertion Loss: 0.2 dB Max.
 Flatness: ± 0.5 dB Max.
 VSWR (ML): 1.30:1 Max.
 Directivity: 18 dB Min.

Mechanical Specifications:

Type: Connectorized
 Material: Aluminum 6061-T6
 Surface Finish: Chem. Film Per MIL-DTL-5541F
 Type I Class 3 (Yellow Iridite)
 RoHS Compliant Available
 Operating Temperature: -55°C to +75°C
 Storage Temperature: -60°C to +85°C
 Humidity: 95% Non-Condensing
 Size: 2.0 x 2.0 x 1.06"

Connector Configurations:

Model	Input (J1)	Output (J2)	Fwd (J3)	Rev (J4)
C10965-10	N Female	N Female	N Female	N Female
C10965-12	N Female	N Female	SMA	SMA
C10965-612	N Female	N Male	SMA	SMA
C10965-714	N Male	N Female	N Female	N Female




Werlatone® Broadband Dual, Uni, and Bi Directional RF Couplers are designed to tolerate the most stringent operating conditions associated with military and EMC testing environments. Many of our RF Directional Couplers, designated Mismatch Tolerant®, will operate continuously, at rated power, into a severe load mismatch condition. Our multi-octave Directional Couplers maintain exceptional coupling flatness, directivity, VSWR, and insertion loss.

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION
 This document contains proprietary information which is the sole property of Werlatone, Inc.

REVISION HISTORY			
REV.	REVISION RECORD	DATE	APPROVED
	PRE-RELEASE		

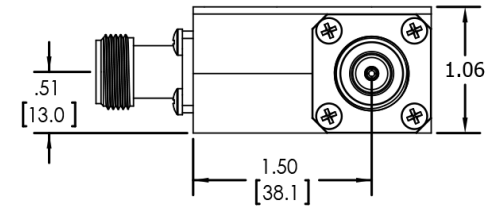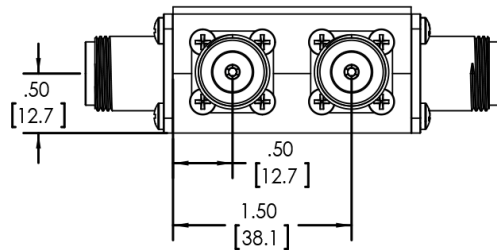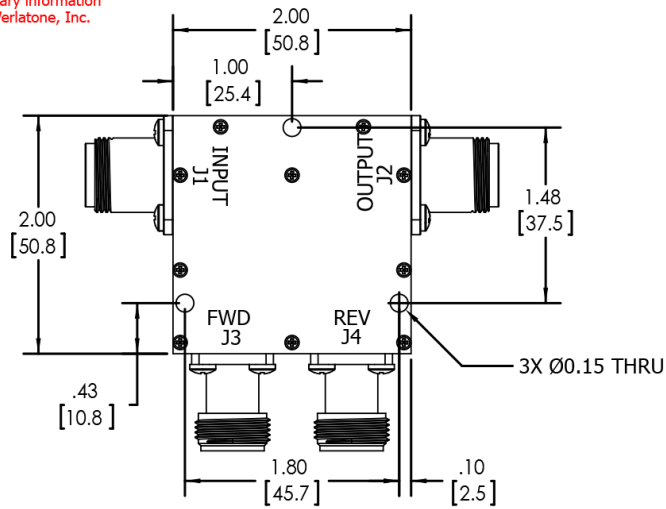

UNLESS OTHERWISE SPECIFIED		DATE	9/30/2014	17 Jon Barrett Rd Patterson, NY 12563
INT	INTERPRET DRAWING IAW MIL-STD-100	SC	9/30/2014	WERLATONE SINCE 1965
CS	DIMENSIONING PER ASME Y14.5M 2009	CHK	9/30/2014	
CS	PARENTHEetical INFO FOR REF ONLY	CS	9/30/2014	TITLE
CS	DIMENSIONS ARE IN INCHES (mm)	DATE	9/30/2014	OUTLINE
CS	DIMENSIONAL LIMITS APPLY BEFORE PROCESSES	DATE	9/30/2014	SIZE
CS	TOLERANCES:	DATE	9/30/2014	CAGE CODE
CS	ANGLES ± 2°	DATE	9/30/2014	DWG NO
CS	3 PL ± .005 (L3)	DATE	9/30/2014	REV
CS	2 PL ± .015 (L4)	DATE	9/30/2014	B
CS	REMOVE ALL BURRS AND SHARP EDGES R.01 MAX	DATE	9/30/2014	28812
CS	CONCENTRICITY MACHINED DIA. .002 FIM	DATE	9/30/2014	21250-500
CS	MACHINE TOOL HIGHMATCH .003 MAX	DATE	9/30/2014	1
CS		DATE	9/30/2014	1:1
CS		DATE	9/30/2014	SHEET 1 OF 1

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
 Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com