



## PRODUCT DATA SHEET

**C1449**

**4-Port Dual Directional Coupler** employs two, 3-Port Uni-Directional Couplers, internally connected, in tandem, providing measurement of both forward and reverse power. Ideal for simultaneously monitoring a system's forward and reverse power and for reflectometer measurements. Unlike the Bi-Directional Coupler, the directivity of the Dual Directional Coupler is unaffected by the loads on the coupled ports.

This unit is de-rated to 5000 W CW when supplied with 7/16 or HN connectors.

### Features:

High Power      Wide Bandwidths      Small Size      Flat Coupling      Custom Designs Available

### Electrical Specifications:

Frequency: 1 - 100 MHz  
Power: 10,000 W CW  
Coupling:  $70 \pm 1.0$  dB Max.  
Insertion Loss: 0.05 dB Max.  
Flatness:  $\pm 0.75$  dB Max.  
VSWR (ML): 1.10:1 Max.  
Directivity: 20 dB Min.

### Mechanical Specifications:

Type: Connectorized  
Material: Aluminum 6061-T6  
Surface Finish: Chem. Film Per MIL-DTL-5541F Type I  
Class 3 (Yellow Iridite) RoHS Compliant Available  
Operating Temperature: -55°C to +75°C  
Storage Temperature: -60°C to +85°C  
Humidity: 95% Non-Condensing  
Size: 6.0 x 3.0 x 2.24"

### Connector Configurations:

Model	Input (J1)	Output (J2)	Fwd (J3)	Rev (J4)
C1449-20	7/16 Female	7/16 Female	N Female	N Female
C1449-22	7/16 Female	7/16 Female	SMA	SMA
C1449-23	7/16 Female	7/16 Female	BNC	BNC
C1449-30	LC Female	LC Female	N Female	N Female
C1449-33	LC Female	LC Female	BNC	BNC
C1449-63	HN Female	HN Female	SMA	SMA
C1449-64	HN Female	HN Female	BNC	BNC
C1449-503	SQS Female	SQS Female	BNC	BNC
C1449-728	7/16 Male	7/16 Female	SMA	SMA
C1449-754	HN Female	HN Male	SMA	SMA
C1449-QC-2	QC Block	QC Block	SMA	SMA

**Restriction on use, duplication, or disclosure of proprietary information.** This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com




## PRODUCT DATA SHEET


C1449

### Performance Data (Specifications subject to change without notice):


Coupling:

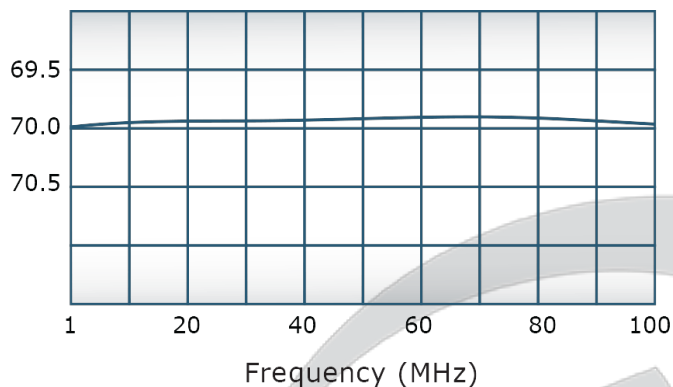

VSWR:

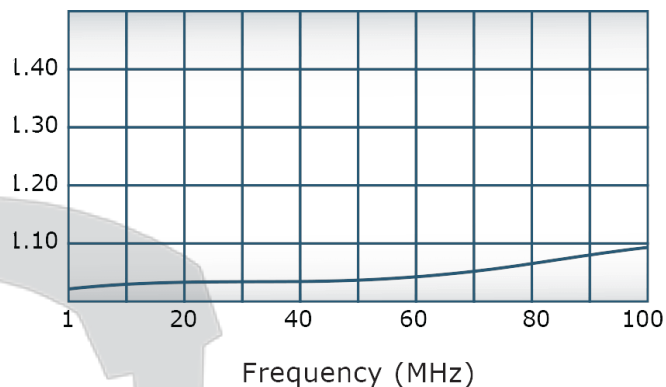

Insertion Loss:

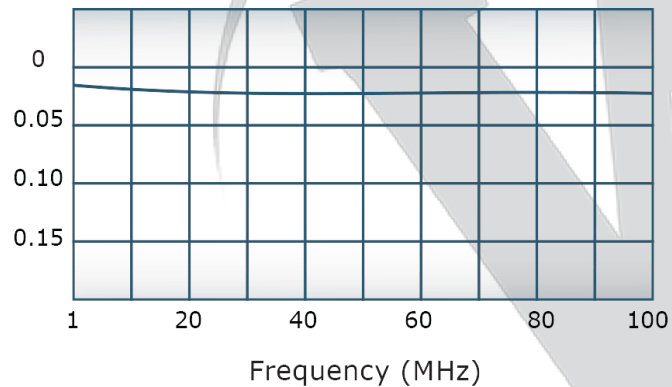

Directivity:

