


PRODUCT DATA SHEET
C2310

4-Port Dual Directional Coupler employs two, 3-Port Uni-Directional Couplers, internally connected, in tandem, providing measurement of both forward and reverse power. Ideal for simultaneously monitoring a system's forward and reverse power and for reflectometer measurements. Unlike the Bi-Directional Coupler, the directivity of the Dual Directional Coupler is unaffected by the loads on the coupled ports.

Features:

High Power Wide Bandwidths Small Size Flat Coupling Custom Designs Available

Electrical Specifications:

Frequency: 20 - 230 MHz
 Power: 2000 W CW
 Coupling: 50 ± 1.0 dB Max.
 Insertion Loss: 0.1 dB Max.
 Flatness: ± 0.5 dB Max.
 VSWR (ML): 1.05:1 Max.
 Directivity: 20 dB Min.

Mechanical Specifications:

Type: Connectorized
 Material: Aluminum 6061-T6
 Surface Finish: Chem. Film Per MIL-DTL-5541F
 Type I Class 3 (Yellow Iridite)
 RoHS Compliant Available
 Operating Temperature: -55°C to +75°C
 Storage Temperature: -60°C to +85°C
 Humidity: 95% Non-Condensing
 Size: 3.75 x 3.0 x 1.88"

Connector Configurations:

| Model | Input (J1) | Output (J2) | Fwd (J3) | Rev (J4) |
|-----------|------------|-------------|----------|----------|
| C2310-10 | N Female | N Female | N Female | N Female |
| C2310-12 | N Female | N Female | SMA | SMA |
| C2310-13 | N Female | N Female | BNC | BNC |
| C2310-43 | SC Female | SC Female | SMA | SMA |
| C2310-61* | HN Female | HN Female | N Female | N Female |
| C2310-63* | HN Female | HN Female | SMA | SMA |
| C2310-64* | HN Female | HN Female | BNC | BNC |

Werlatone® Broadband Dual, Uni, and Bi Directional RF Couplers are designed to tolerate the most stringent operating conditions associated with military and EMC testing environments. Our multi-octave Directional Couplers maintain exceptional coupling flatness, directivity, VSWR, and insertion loss.




PRODUCT DATA SHEET


C2310

Performance Data (Specifications subject to change without notice):


Coupling:

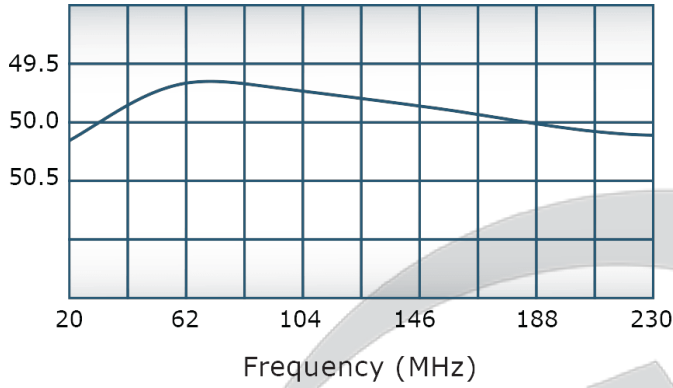


VSWR:

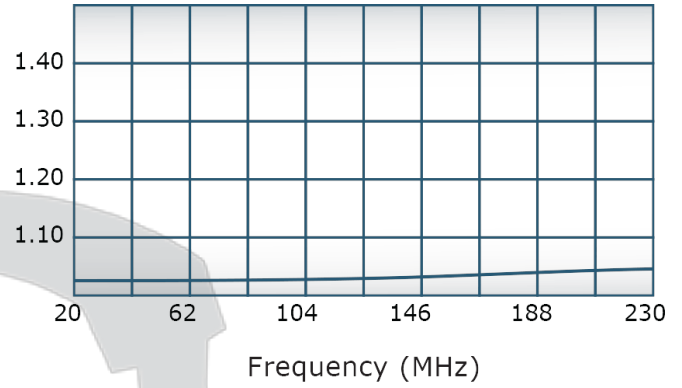

Insertion Loss:

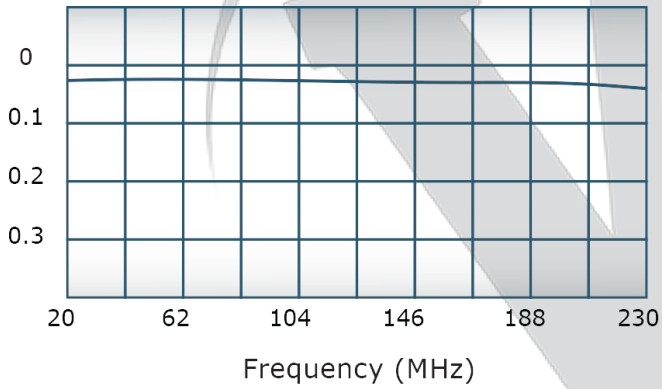

Directivity:

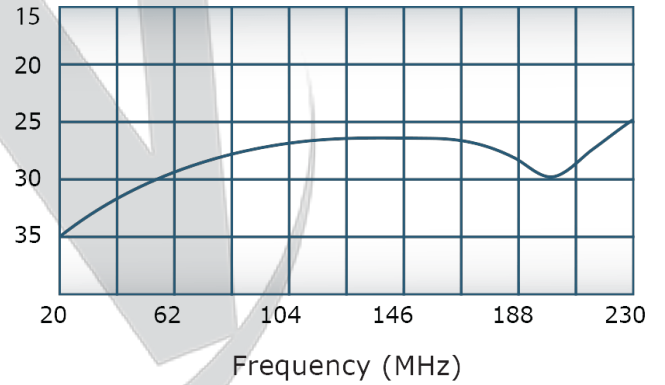

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of

Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com


RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION

This document contains proprietary information which is the sole property of Werlatone, Inc.

| REVISION HISTORY | | | |
|------------------|-----------------|----------|----------|
| REV. | REVISION RECORD | DATE | APPROVED |
| A | ECN 9696 | 11/29/18 | RB |

NOTES: UNLESS OTHERWISE SPECIFIED

- MATERIAL: ALUMINUM 6061-T6**
- FINISH: CHEM FILM PER MIL-DTL-5541F TYPE I CLASS 3 (YELLOW IRIDITE)**
- CONNECTORS:
J1, J2: N FEMALE
J3, J4: SMA FEMALE**

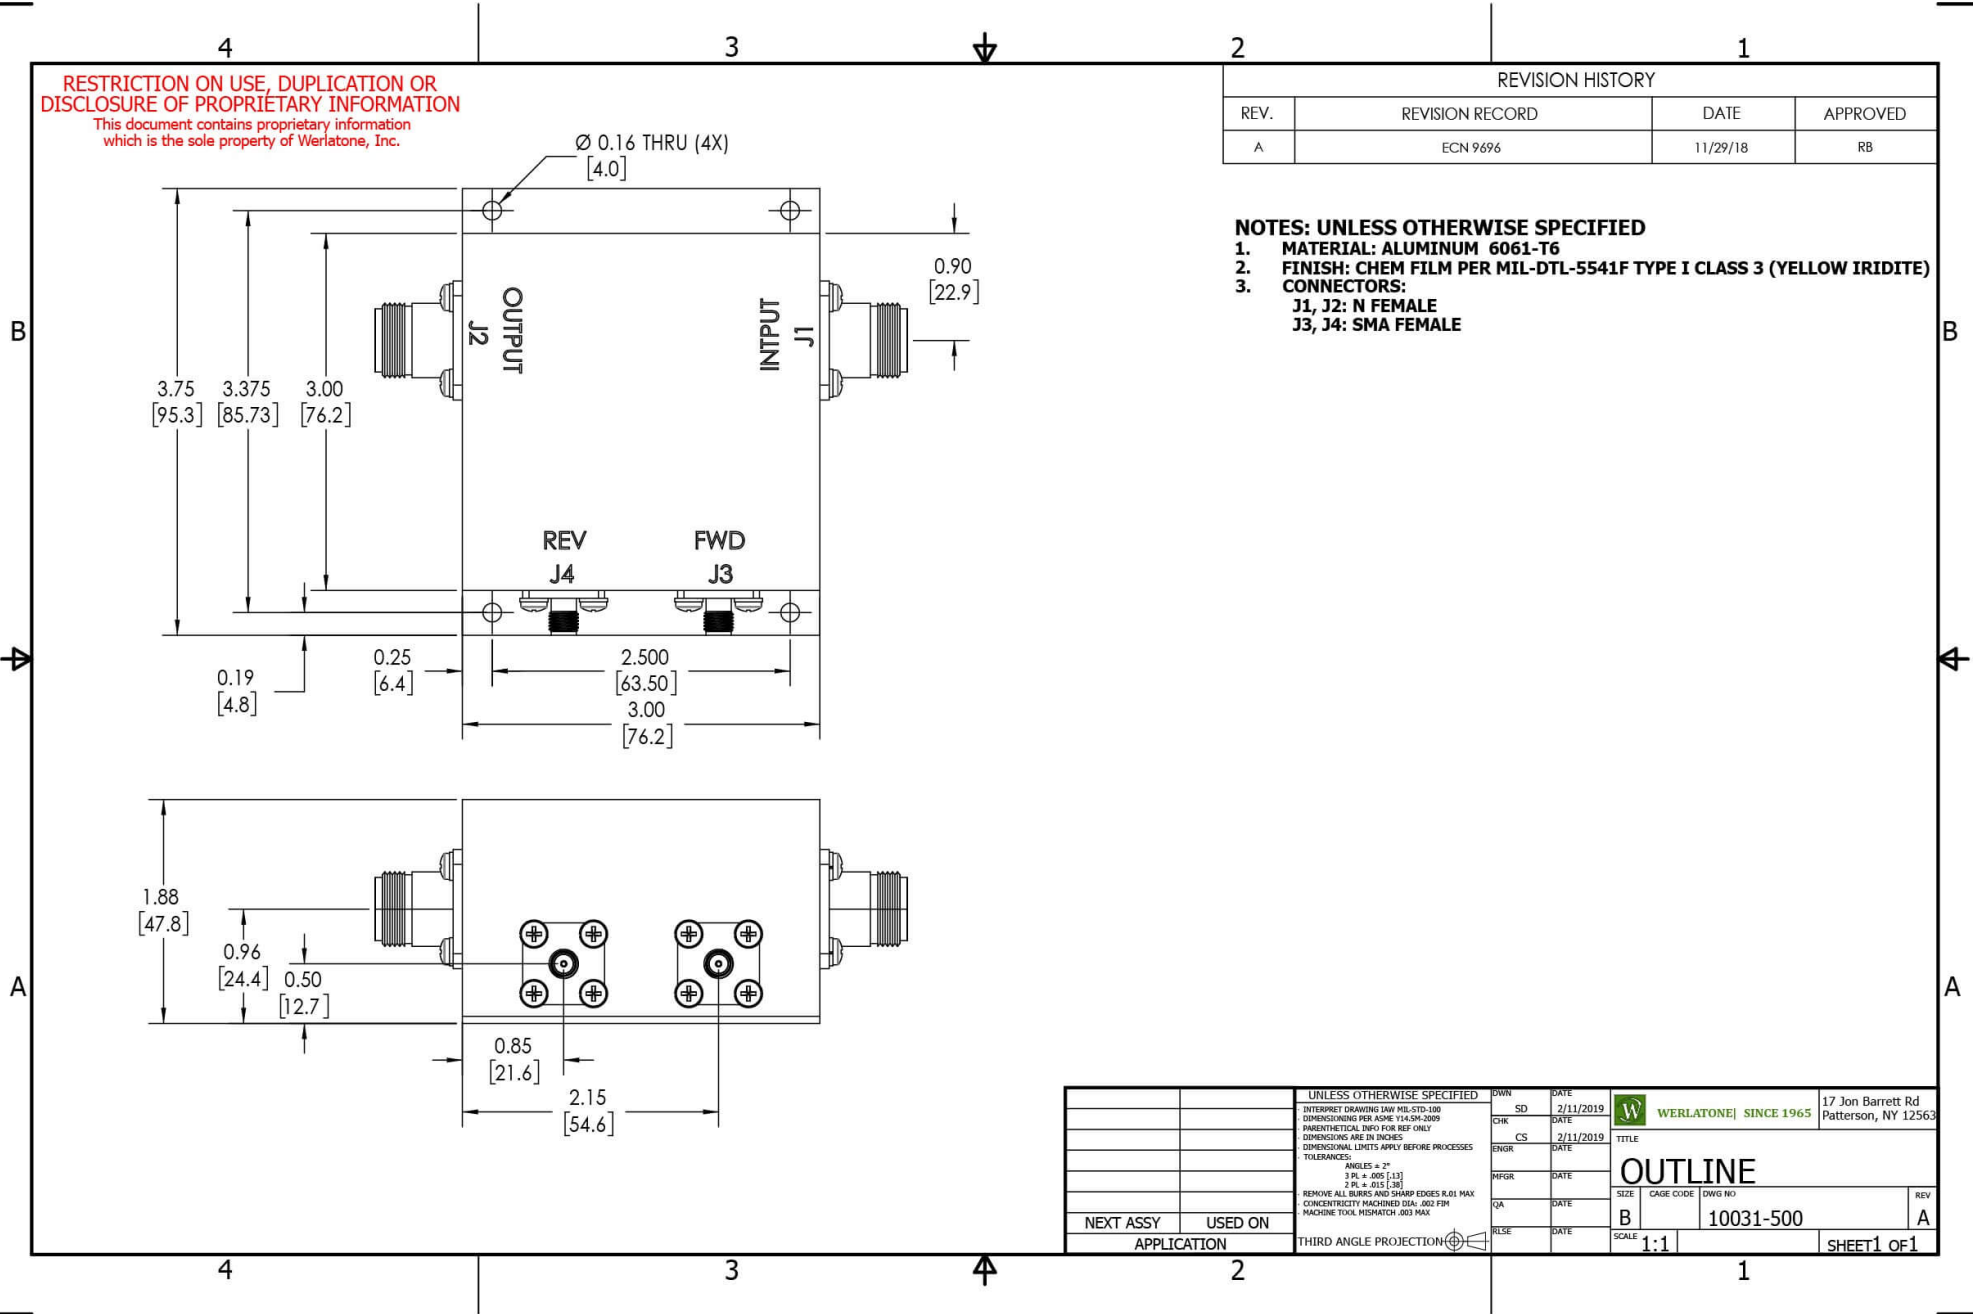

| | | | | |
|---|---------|------------------------|----------------|--|
| UNLESS OTHERWISE SPECIFIED | | DWN | DATE | 17 Jon Barrett Rd Patterson, NY 12563 |
| INTERPRET DRAWING IAW MIL-STD-100 | SD | 2/11/2019 | | |
| DIMENSIONS PER ASME Y14.5M-2009 | CHK | DATE | | |
| PARENTHEetical INFO FOR REF ONLY | CS | 2/11/2019 | TITLE | |
| DIMENSIONS ARE IN INCHES | ENGR | DATE | OUTLINE | |
| DIMENSIONAL LIMITS APPLY BEFORE PROCESSES | INFR | DATE | SIZE | CAGE CODE |
| TOLERANCES: | QA | DATE | B | 10031-500 |
| ANGLES = 2° | RLSE | DATE | SCALE | 1:1 |
| 3 PL ± .005 [13] | | | | |
| 2 PL ± .015 [38] | | | | |
| REMOVE ALL BURRS AND SHARP EDGES R.01 MAX | | | | |
| CONCENTRICITY MACHINED DIA: .002 FIM | | | | |
| MACHINE TOOL MISMATCH .003 MAX | | | | |
| NEXT ASSY | USED ON | THIRD ANGLE PROJECTION | | REV |
| APPLICATION | | | | A |
| | | | | SHEET 1 OF 1 |

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
 Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com