



PRODUCT DATA SHEET

C2408

3-Port Uni-Directional Coupler: Consists of a main line and a coupled line. One end of the coupled line is internally terminated, while the other end serves as a coupled port. Ideal for sampling and monitoring power in one direction at a given time. It is necessary to physically reverse the orientation of the unit to change from a forward to a reverse power measurement.

Features:

High Power Wide Bandwidths Small Size Flat Coupling Custom Designs Available

Electrical Specifications:

Frequency:	1 - 500 MHz
Power:	5 W CW
Coupling:	20 ± 1.0 dB Max.
Insertion Loss:	1.0 dB Max.
Flatness:	± 0.5 dB Max.
VSWR (ML):	1.20:1 Max.
Directivity:	25 dB Min.

Mechanical Specifications:

Type:	Connectorized
Material:	Aluminum 6061-T6
Surface Finish:	Chem. Film Per MIL-DTL-5541F Type I Class 3 (Yellow Iridite) RoHS Compliant Available
Operating Temperature:	-55°C to +75°C
Storage Temperature:	-60°C to +85°C
Humidity:	95% Non-Condensing
Size:	1.5 x 1.5 x 1.12"

Port Configurations:

Model	Input (J1)	Output (J2)	Fwd (J3)
C2408-10	N Female	N Female	N Female
C2408-714	N Male	N Female	N Female


Werlatone® Broadband Dual, Uni, and Bi Directional RF Couplers are designed to tolerate the most stringent operating conditions associated with military and EMC testing environments. Many of our RF Directional Couplers, designated Mismatch Tolerant®, will operate continuously, at rated power, into a severe load mismatch condition. Our multi-octave Directional Couplers maintain exceptional coupling flatness, directivity, VSWR, and insertion loss.

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.


Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

Performance Data (Specifications subject to change without notice):


Coupling:

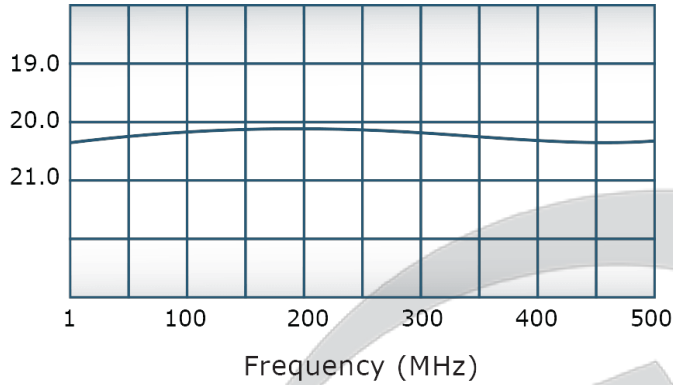


VSWR:

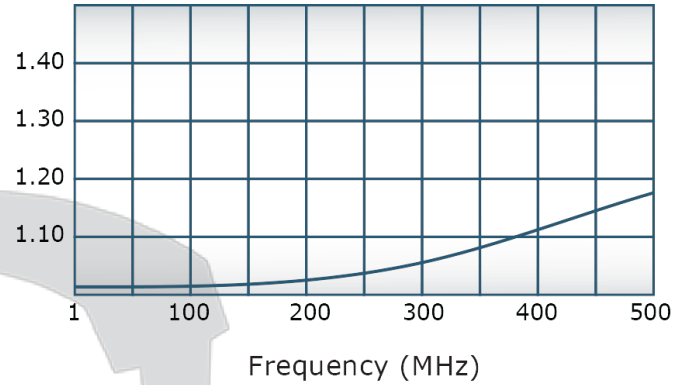

Insertion Loss:



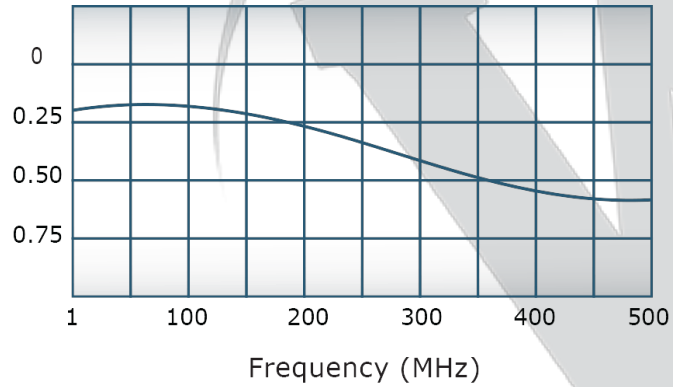


Directivity:

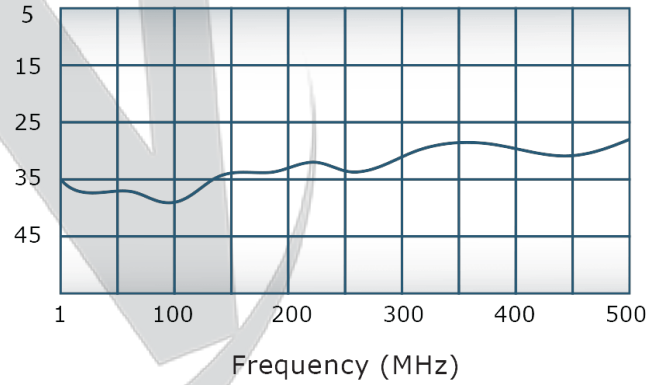

RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION
 This document contains proprietary information which is the sole property of Werlatone, Inc.

REVISION HISTORY			
REV.	REVISION RECORD	DATE	APPROVED
-	INITIAL RELEASE	11/14/2016	CS

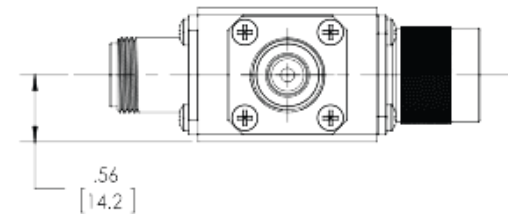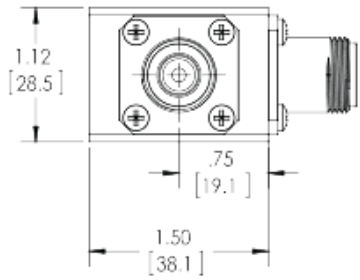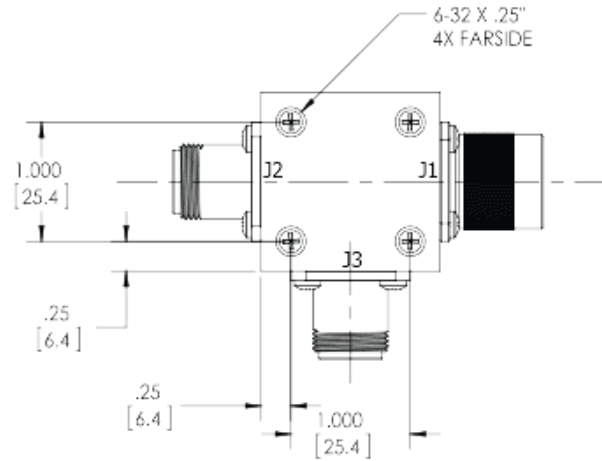

UNLESS OTHERWISE SPECIFIED		DATE	17 Jon Barrett Rd Patterson, NY 12563	
PLP	11/14/2016	DATE	W	
CS	11/14/2016	DATE	WERLATONE SINCE 1965	
C2408, C2409		DATE	TITLE	
USED ON		DATE	REV	
APPLICATION		DATE	SIZE	CASE CODE
THIRD ANGLE PROJECTION		DATE	B	10133-500
		DATE	SCALE	DWG NO
		DATE	1:1	
		DATE	SHEET 1 OF 1	

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
 Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com