


RODUCT DATA SHEET				C3820	
Non-Isolated Uneven Splitters (Taps) : Utilized to un-evenly split a single run of 50 Ohm coaxial cable, hosting multiple frequency bands, so that a shorter corridor, tunnel, shaft, or hallway is provided a lesser portion of power on the main coaxial run than that required by a longer run. Non-Isolated Uneven Splitters are Bi- Directional, and unlike Directional Couplers, all ports can communicate with one another.					
Features:					
High Power	Wide Bandwidths	Small Size	Flat Coupling	Custom Designs Available	
Electrical Spe	Electrical Specifications:				
Frequency: Power: Coupling: Insertion Loss: Flatness: VSWR (ML):	77 - 2200 MHz 100 W CW 6 ± 1.0 dB Max. 2.0 dB Max. ± 1.0 dB Max. 1.50:1 Max.				
Mechanical S	pecifications:				
Type: Connectorized Material: Aluminum 6061-T6 Surface Finish: Chem. Film Per MIL-DTL-5541F Type I Class 3 (Yellow Iridite) RoHS Compliant Available					
Operating Tem Storage Tempe Humidity: Size: Weight:	perature: -55°C to + rature: -60°C to +	75°C 85°C Condensing			
Port Configur	ations:				
Model C3820-10 C3820-20 C3820-24	Input (J1) N Female 7/16 Female 7/16 Female		Output (J2) N Female 7/16 Female 7/16 Female	Fwd (J3) N Female N Female 7/16 Female	
	Broadband Non-Isolated U itions associated with Dis			ned to tolerate the most stringent).	


Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com



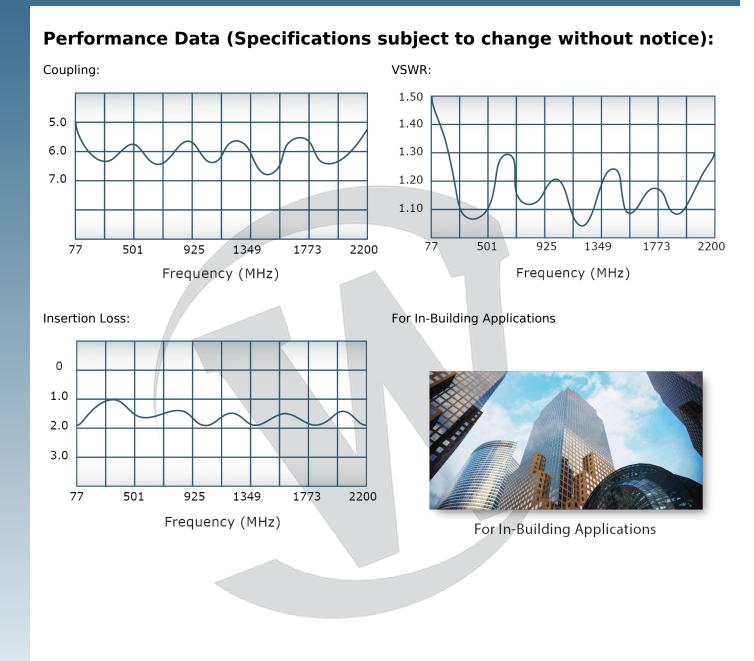

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

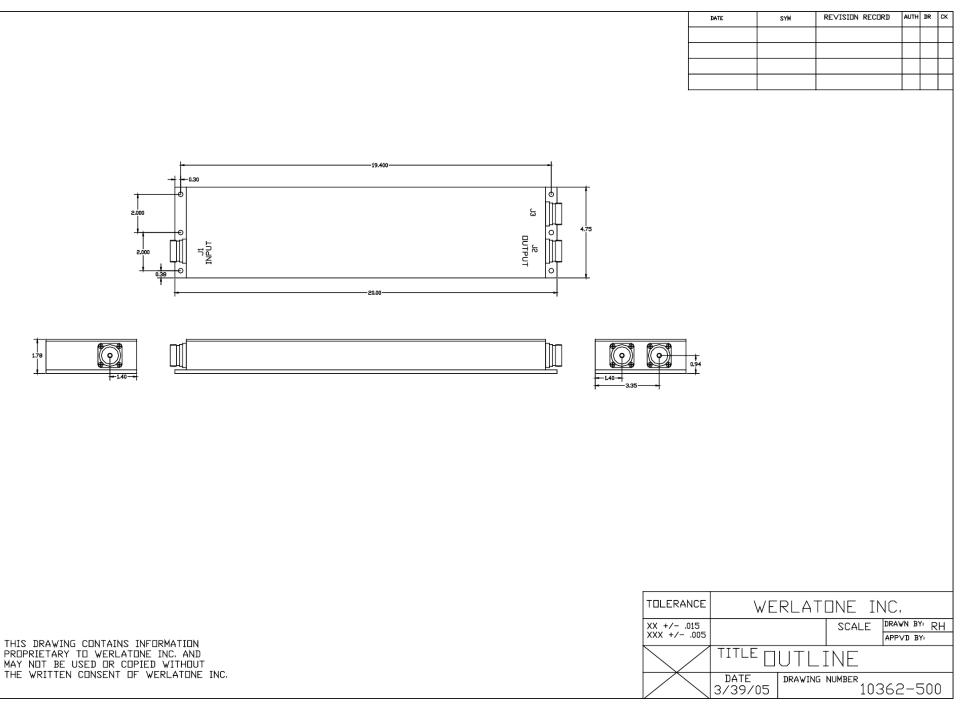

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc. Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com