



## PRODUCT DATA SHEET

C4025

**4-Port Dual Directional Coupler** employs two, 3-Port Uni-Directional Couplers, internally connected, in tandem, providing measurement of both forward and reverse power. Ideal for simultaneously monitoring a system's forward and reverse power and for reflectometer measurements. Unlike the Bi-Directional Coupler, the directivity of the Dual Directional Coupler is unaffected by the loads on the coupled ports.

### Features:

High Power      Wide Bandwidths      Small Size      Flat Coupling      Custom Designs Available

### Electrical Specifications:

Frequency:      20 - 100 MHz  
 Power:          250 W CW  
 Coupling:        30 ± 1.0 dB Max.  
 Flatness:        ± 0.5 dB Max.  
 Insertion Loss: 0.25 dB Max.  
 VSWR (ML):     1.25:1 Max.  
 Directivity:     20 dB Min.

### Mechanical Specifications:

Type:            Connectorized  
 Material:        Aluminum 6061-T6  
 Surface Finish: Chem. Film Per MIL-DTL-5541F  
                       Type I Class 3 (Yellow Iridite)  
                       RoHS Compliant Available  
 Operating Temperature: -55°C to +75°C  
 Storage Temperature: -60°C to +85°C  
 Humidity:       95% Non-Condensing  
 Size:             4.0 x 2.0 x 1.88"

### Connector Configurations:

| Model     | Input (J1) | Output (J2) | Fwd (J3) | Rev (J4) |
|-----------|------------|-------------|----------|----------|
| C4025-10  | N Female   | N Female    | N Female | N Female |
| C4025-12  | N Female   | N Female    | SMA      | SMA      |
| C4025-13  | N Female   | N Female    | BNC      | BNC      |
| C4025-102 | SMA        | SMA         | SMA      | SMA      |

**Werlatone®** Broadband Dual, Uni, and Bi Directional RF Couplers are designed to tolerate the most stringent operating conditions associated with military and EMC testing environments. Many of our RF Directional Couplers, designated Mismatch Tolerant®, will operate continuously, at rated power, into a severe load mismatch condition. Our multi-octave Directional Couplers maintain exceptional coupling flatness, directivity, VSWR, and insertion loss.

**Restriction on use, duplication, or disclosure of proprietary information.** This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com




## PRODUCT DATA SHEET


C4025

### Performance Data (Specifications subject to change without notice):


Coupling:

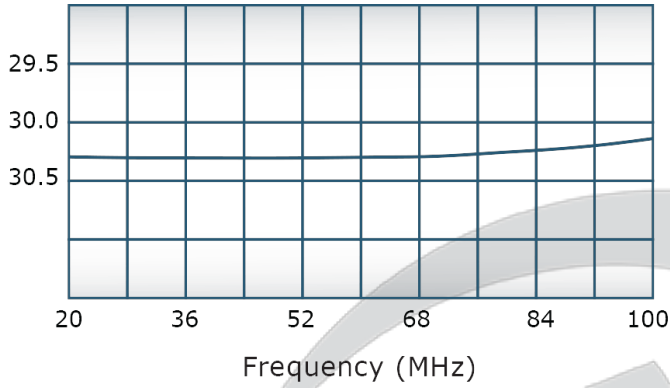


VSWR:

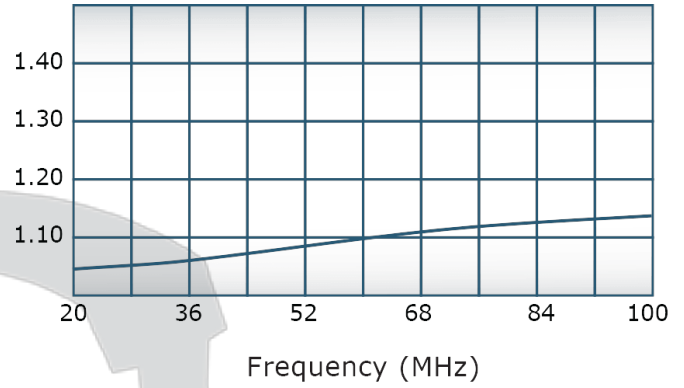

Insertion Loss:

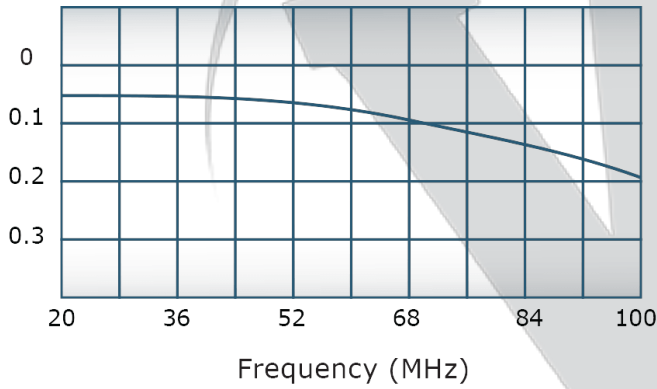

Directivity:

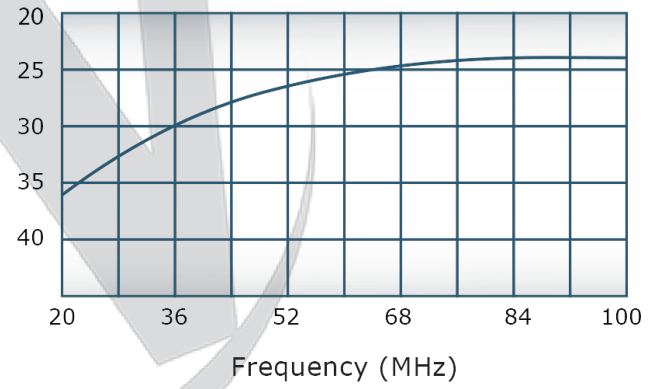


Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of

Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

**RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION**  
 This document contains proprietary information which is the sole property of Werlatone, Inc.

| REVISION HISTORY |                 |       |          |
|------------------|-----------------|-------|----------|
| REV.             | REVISION RECORD | DATE  | APPROVED |
| A                | ECN 1001        | 10/86 | GW       |
| B                | ECN 1002        | 6/92  | DK       |
| C                | ECN 1319        | 4/95  | CS       |
| D                | ECN 1421        | 12/96 | CS       |
| E                | ECN 9696        | 11/18 | RB       |

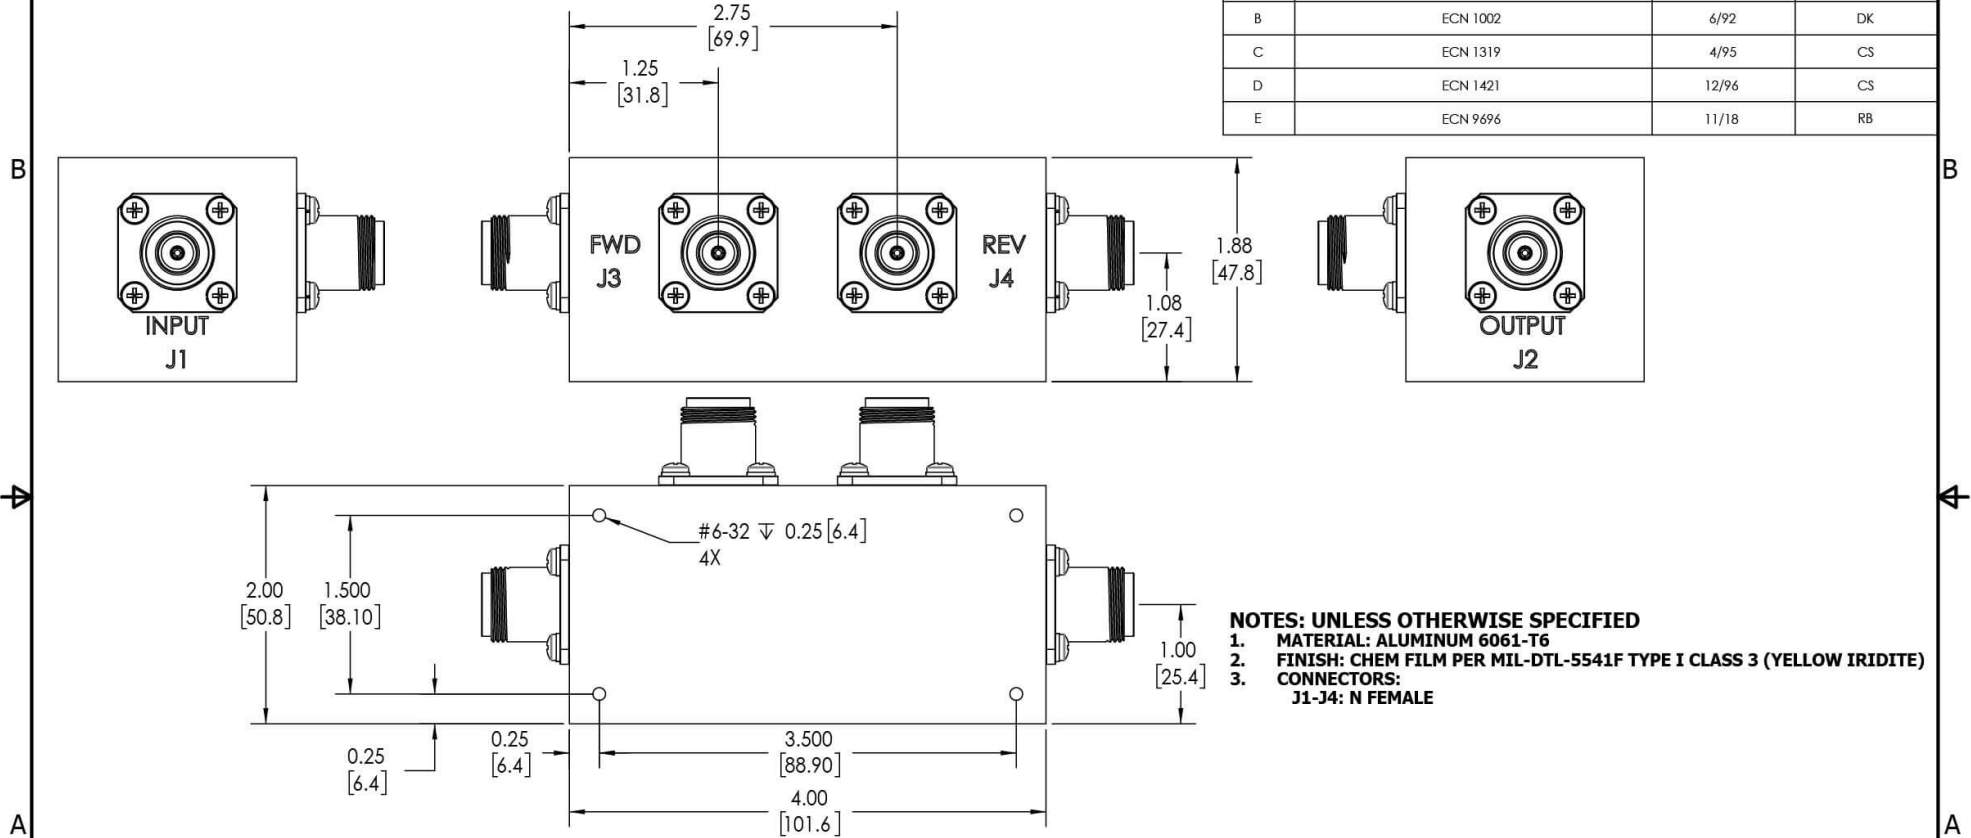

- NOTES: UNLESS OTHERWISE SPECIFIED**
- MATERIAL: ALUMINUM 6061-T6**
  - FINISH: CHEM FILM PER MIL-DTL-5541F TYPE I CLASS 3 (YELLOW IRIDITE)**
  - CONNECTORS:  
J1-J4: N FEMALE**

|   |                        |      |           |   |           |           |              |
|---|------------------------|------|-----------|---|-----------|-----------|--------------|
| UNLESS OTHERWISE SPECIFIED                |                        | DATE | 2/11/2019 | <b>WERLATONE</b> SINCE 1965<br>17 Jon Barrett Rd<br>Patterson, NY 12563 |           |           |              |
| INTERPRET DRAWING IAW MIL-STD-100         | SD                     | DATE |           |   |           |           |              |
| DIMENSIONS PER ASME Y14.5M-2009           | CHK                    | DATE |           | <b>OUTLINE</b><br>TITLE   |           |           |              |
| PARENTHEetical INFO FOR REF ONLY          | CS                     | DATE | 2/11/2019 |   |           |           |              |
| DIMENSIONS ARE IN INCHES                  | ENGR                   | DATE |           | SIZE  | CAGE CODE | DWG NO    | REV          |
| DIMENSIONAL LIMITS APPLY BEFORE PROCESSES | INFR                   | DATE |           | B   |           | 10018-500 | E            |
| TOLERANCES:                               | QA                     | DATE |           | SCALE   | 1:1       |           | SHEET 1 OF 1 |
| ANGLES ± 2°                               | RLSE                   | DATE |           |   |           |           |              |
| 3 PL ± .005 [1.3]                         |                        |      |           |   |           |           |              |
| 2 PL ± .015 [3.8]                         |                        |      |           |   |           |           |              |
| REMOVE ALL BURRS AND SHARP EDGES R.01 MAX |                        |      |           |   |           |           |              |
| CONCENTRICITY MACHINED DIA: .002 FIM      |                        |      |           |   |           |           |              |
| MACHINE TOOL MISMATCH .003 MAX            |                        |      |           |   |           |           |              |
| NEXT ASSY                                 | USED ON                |      |           |   |           |           |              |
| APPLICATION                               | THIRD ANGLE PROJECTION |      |           |   |           |           |              |

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.  
 Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com