
PRODUCT DATA SHEET
C5342

4-Port Dual Directional Coupler employs two, 3-Port Uni-Directional Couplers, internally connected, in tandem, providing measurement of both forward and reverse power. Ideal for simultaneously monitoring a system's forward and reverse power and for reflectometer measurements. Unlike the Bi-Directional Coupler, the directivity of the Dual Directional Coupler is unaffected by the loads on the coupled ports.

Features:

High Power Wide Bandwidths Small Size Flat Coupling Custom Designs Available

Electrical Specifications:

Frequency: 470 - 860 MHz
 Power: 5000 W CW
 Coupling: 60 ± 1.0 dB Max.
 Insertion Loss: 0.1 dB Max.
 Flatness: ± 0.25 dB Max.
 VSWR (ML): 1.15:1 Max.
 Directivity: 20 dB Min.

Mechanical Specifications:

Type: Connectorized
 Material: Aluminum 6061-T6
 Surface Finish: Chem. Film Per MIL-DTL-5541F
 Type I Class 3 (Yellow Iridite)
 RoHS Compliant Available
 Operating Temperature: -55°C to +75°C
 Storage Temperature: -60°C to +85°C
 Humidity: 95% Non-Condensing
 Size: 6" Line Section


Connector Configurations:

Model	Input (J1)	Output (J2)	Fwd (J3)	Rev (J4)
C5342-81	1 5/8" EIA	1 5/8" EIA	N Female	N Female
C5342-83	1 5/8" EIA	1 5/8" EIA	SMA	SMA
C5342-84	1 5/8" EIA	1 5/8" EIA	BNC	BNC

Werlatone® Broadband Dual, Uni, and Bi Directional RF Couplers are designed to tolerate the most stringent operating conditions associated with military and EMC testing environments. Many of our RF Directional Couplers, designated Mismatch Tolerant®, will operate continuously, at rated power, into a severe load mismatch condition. Our multi-octave Directional Couplers maintain exceptional coupling flatness, directivity, VSWR, and insertion loss.

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

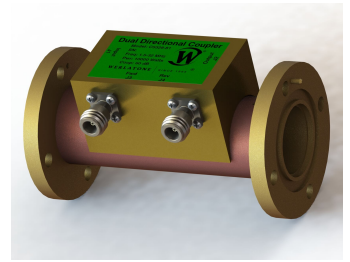


PRODUCT DATA SHEET


C5342

Performance Data (Specifications subject to change without notice):


Coupling:

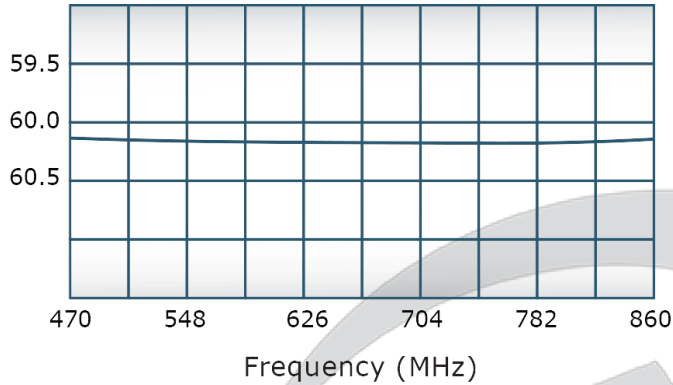


VSWR:

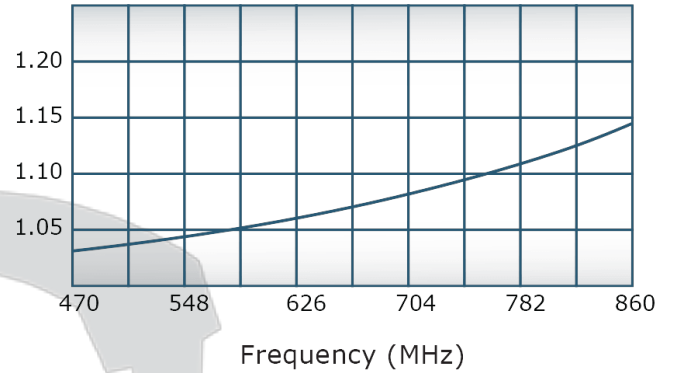

Insertion Loss:

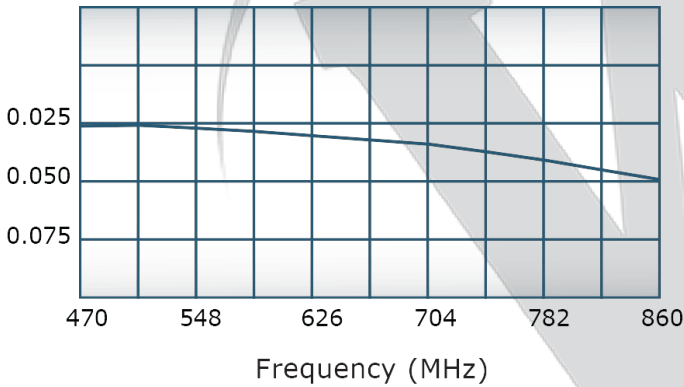

Directivity:

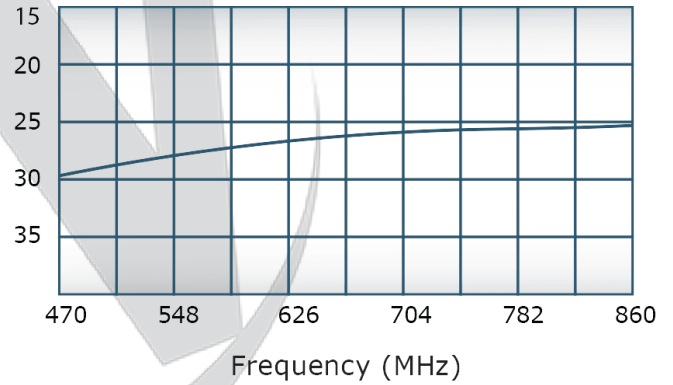


Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of

Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION
 This document contains proprietary information which is the sole property of Werlatone, Inc.

REVISION HISTORY			
REV.	REVISION RECORD	DATE	APPROVED
A	ECN 9696	11/29/18	RB

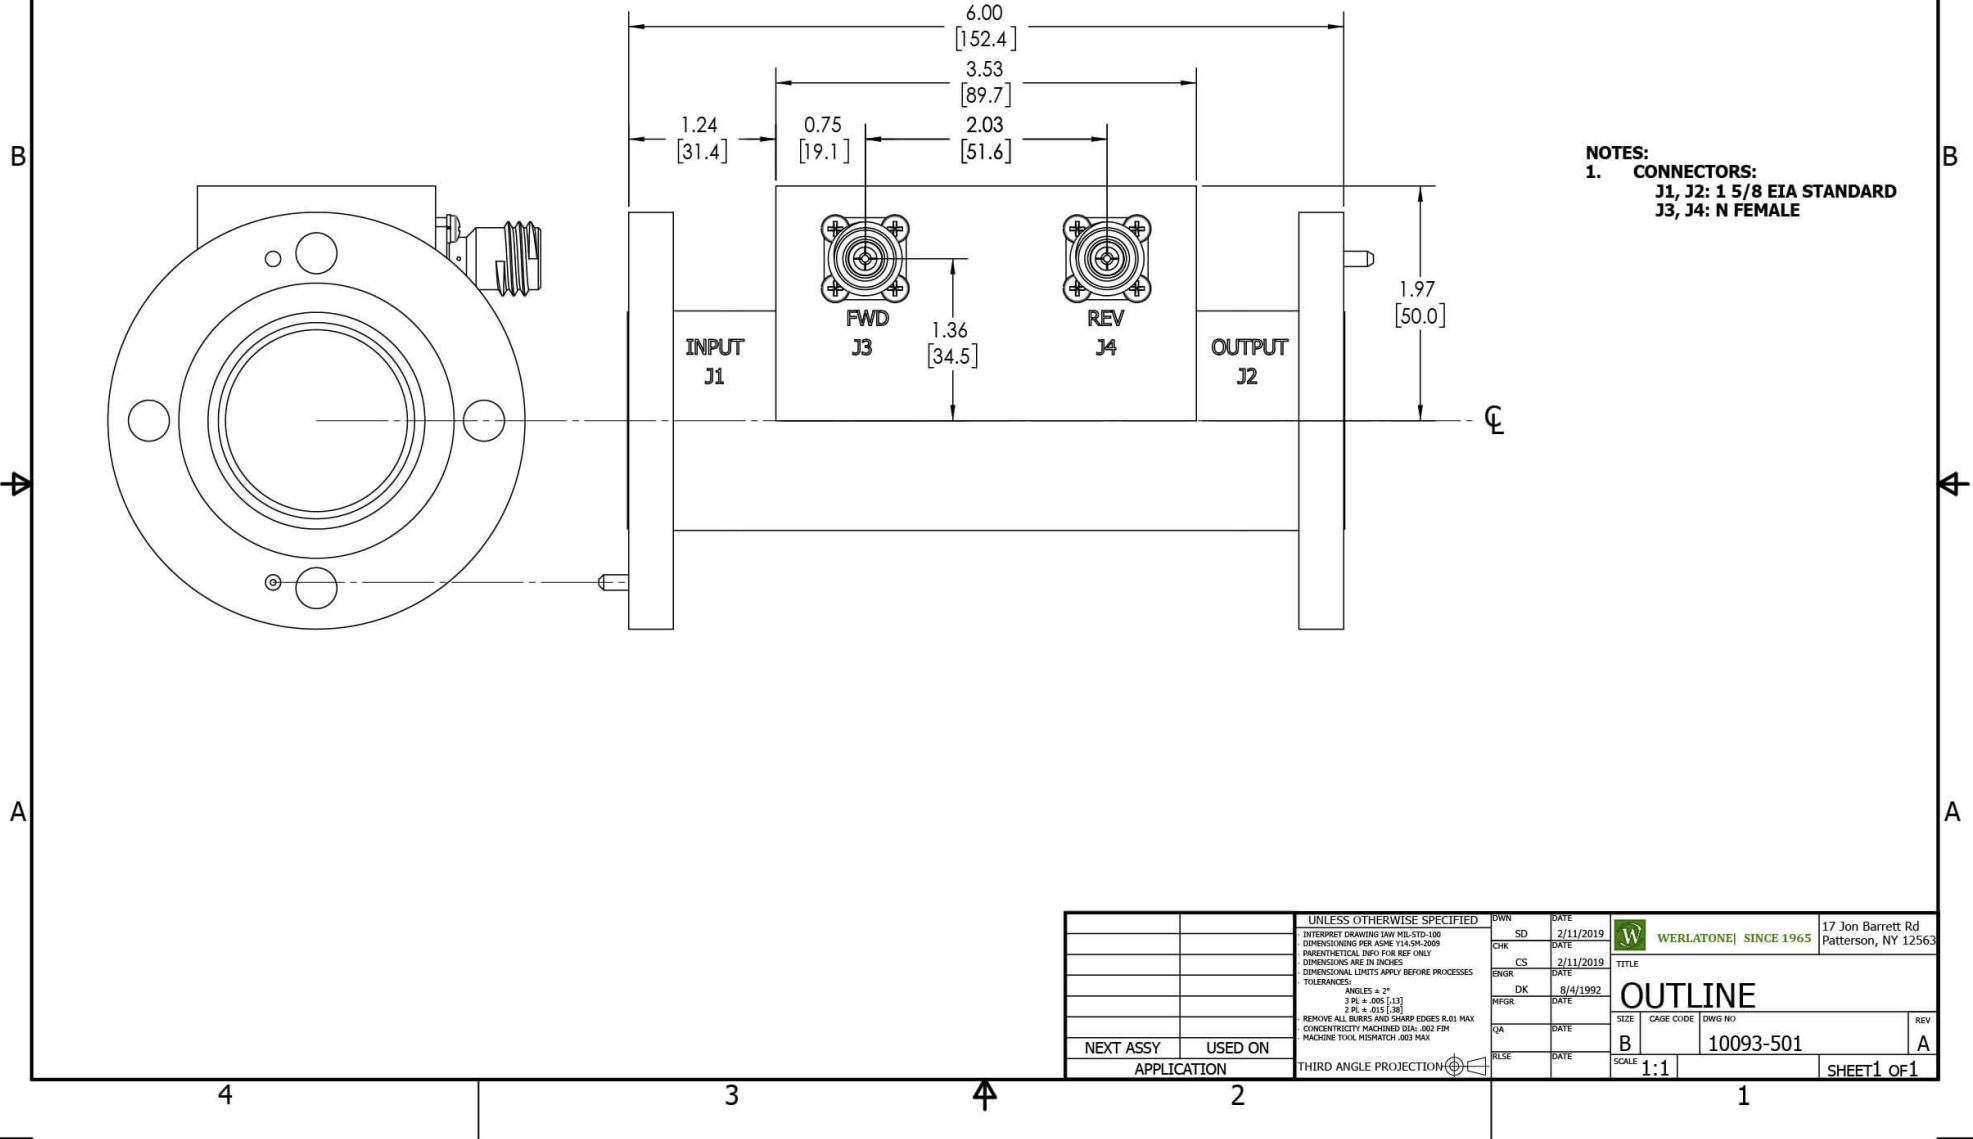

NOTES:
 1. **CONNECTORS:**
 J1, J2: 1 5/8 EIA STANDARD
 J3, J4: N FEMALE

UNLESS OTHERWISE SPECIFIED		DWN	DATE	WERLATONE SINCE 1965 <table border="0" style="float: right;"> <tr> <td>17 Jon Barrett Rd</td> </tr> <tr> <td>Patterson, NY 12563</td> </tr> </table>	17 Jon Barrett Rd	Patterson, NY 12563
17 Jon Barrett Rd						
Patterson, NY 12563						
INTERPRET DRAWING IAW MIL-STD-100	SD	2/11/2019				
DIMENSIONS FOR ASME Y14.5M-2009	CHK	DATE				
PARENTHEetical INFO FOR REF ONLY	CS	2/11/2019	TITLE			
DIMENSIONS ARE IN INCHES	ENGR	DATE	OUTLINE			
DIMENSIONAL LINES APPLY BEFORE PROCESSES	DK	8/4/1992	SIZE			
TOLERANCES:	INFR	DATE	CAGE CODE			
ANGLES ± 2°	QA	DATE	DWG NO			
3 PL ± .005 (1.3)	RLSE	DATE	REV			
2 PL ± .015 (1.38)			B			
REMOVE ALL BURRS AND SHARP EDGES R.01 MAX			10093-501			
CONCENTRICITY MACHINED DIA: .002 FIM			A			
MACHINE TOOL MISMATCH .003 MAX.						
NEXT ASSY	USED ON		SCALE			
APPLICATION	THIRD ANGLE PROJECTION		1:1			
			SHEET 1 OF 1			

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
 Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com