



## PRODUCT DATA SHEET

C5497

**4-Port Dual Directional Coupler** employs two, 3-Port Uni-Directional Couplers, internally connected, in tandem, providing measurement of both forward and reverse power. Ideal for simultaneously monitoring a system's forward and reverse power and for reflectometer measurements. Unlike the Bi-Directional Coupler, the directivity of the Dual Directional Coupler is unaffected by the loads on the coupled ports.

### Electrical Specifications:

Frequency: 100 - 500 MHz  
 Power: 600 W CW  
 Coupling:  $40 \pm 1.0$  dB Max.  
 Insertion Loss: 0.2 dB Max.  
 Flatness:  $\pm 0.3$  dB Max.  
 VSWR (ML): 1.10:1 Max.  
 Directivity: 20 dB Min.


### Mechanical Specifications:

Type: Connectorized  
 Material: Aluminum 6061-T6  
 Surface Finish: Chem. Film Per MIL-DTL-5541F  
 Type I Class 3 (Yellow Iridite)  
 RoHS Compliant Available  
 Operating Temperature: -55°C to +75°C  
 Storage Temperature: -60°C to +85°C  
 Humidity: 95% Non-Condensing  
 Size: 3.0 x 3.0 x 1.09"

### Connector Configurations:

Model	Input (J1)	Output (J2)	Fwd (J3)	Rev (J4)
C5497-10	N Female	N Female	N Female	N Female
C5497-12	N Female	N Female	SMA	SMA
C5497-13	N Female	N Female	BNC	BNC
C5497-102	SMA	SMA	SMA	SMA
C5497-302	TNC Female	TNC Female	SMA	SMA
C5497-712	N Male	N Female	SMA	SMA
C5497-714	N Male	N Female	N Female	N Female

**Werlatone®** Broadband Dual, Uni, and Bi Directional RF Couplers are designed to tolerate the most stringent operating conditions associated with military and EMC testing environments. Many of our RF Directional Couplers, designated Mismatch Tolerant®, will operate continuously, at rated power, into a severe load mismatch condition. Our multi-octave Directional Couplers maintain exceptional coupling flatness, directivity, VSWR, and insertion loss.

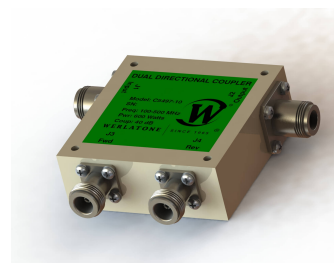


## PRODUCT DATA SHEET


C5497

### Performance Data (Specifications subject to change without notice):


Coupling:

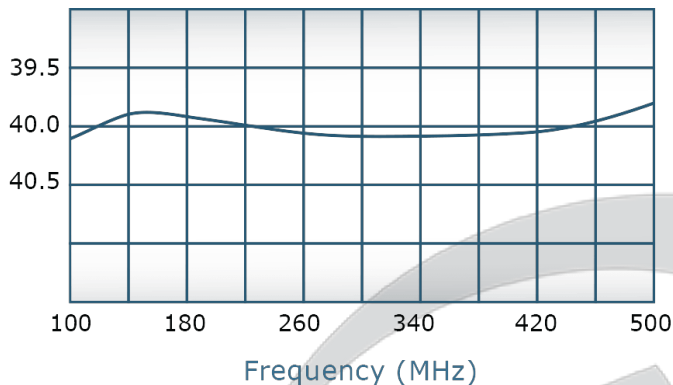


VSWR:

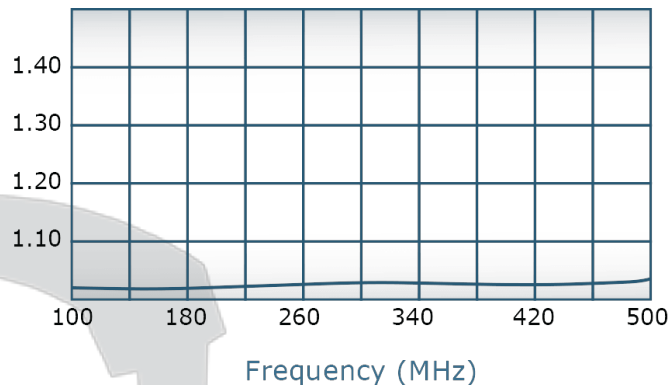

Insertion Loss:

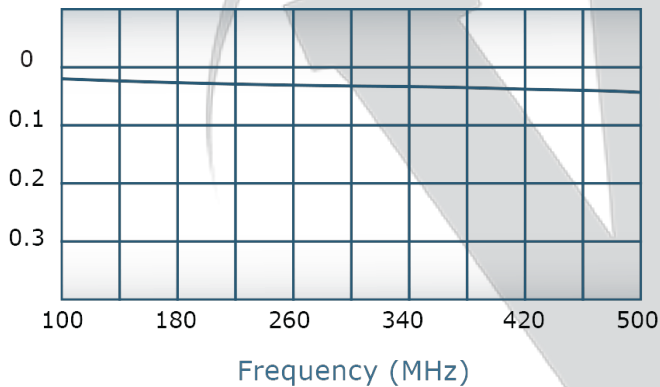

Directivity:

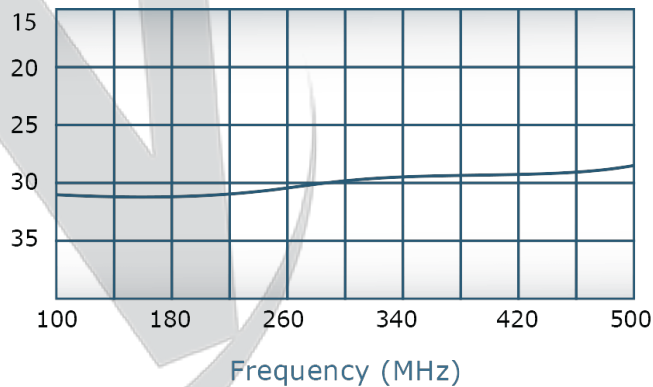




**Restriction on use, duplication, or disclosure of proprietary information.** This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

A



		UNLESS OTHERWISE SPECIFIED		OWN		DATE		 <b>WERLATONE® SINCE 1965</b>		17 Jon Barrett Rd Patterson, NY 12568	
		<ul style="list-style-type: none"> <li>• INTERPRET DRAWING AS PER MIL-STD-100</li> <li>• DIMENSIONING PER ASME Y14.5-2009</li> <li>• DIMENSIONAL TOL. INFO FOR REF ONLY</li> <li>• DIMENSIONS ARE IN INCHES</li> <li>• DIMENSIONAL TOL. APPLY BEFORE PROCESSES</li> <li>• TOLERANCES:</li> </ul>		RH		7/5/2001		 <b>WERLATONE® SINCE 1965</b>		17 Jon Barrett Rd Patterson, NY 12568	
		ANGLES ± 2° 2 P. ± .002 [13]		CHK		DATE					
		± P. ± .005 [30] • REMOVE ALL BURRS AND SHARP EDGES R.25 MAX • CONCENTRICITY MACHINED DIA. .002 FIM • MACHINE TOOL, REVISION: .001 MAX		ENGR		DATE					
				MFG		7/5/2001					
				QA		DATE		SIZE CASE CODE DWG NO <b>B 10379-505</b>		RH DATE	
NEXT ASSY USED ON				REUSE		DATE		SCALE <b>1:1</b>		SHEET 1 OF 1	
APPLICATION		THIRD ANGLE PROJECTION 									

3