



PRODUCT DATA SHEET

C5768

4-Port Dual Directional Coupler employs two, 3-Port Uni-Directional Couplers, internally connected, in tandem, providing measurement of both forward and reverse power. Ideal for simultaneously monitoring a system's forward and reverse power and for reflectometer measurements. Unlike the Bi-Directional Coupler, the directivity of the Dual Directional Coupler is unaffected by the loads on the coupled ports.

Features:

High Power

Wide Bandwidths

Small Size

Flat Coupling

Custom Designs Available

Electrical Specifications:

Frequency: 200 - 1000 MHz
 Power: 500 W CW
 Coupling: 40 ± 1.0 dB Max.
 Insertion Loss: 0.2 dB Max.
 Flatness: ± 0.3 dB Max.
 VSWR (ML): 1.10:1 Max.
 Directivity: 20 dB Min.

Mechanical Specifications:

Type: Connectorized
 Material: Aluminum 6061-T6
 Surface Finish: Chem. Film Per MIL-DTL-5541F
 Type I Class 3 (Yellow Iridite)
 RoHS Compliant Available
 Operating Temperature: -55°C to +75°C
 Storage Temperature: -60°C to +85°C
 Humidity: 95% Non-Condensing
 Size: 3.0 x 3.0 x 1.09"

Connector Configurations:

Model	Input (J1)	Output (J2)	Fwd (J3)	Rev (J4)
C5768-10	N Female	N Female	N Female	N Female
C5768-12	N Female	N Female	SMA	SMA
C5768-13	N Female	N Female	BNC	BNC
C5768-610	N Male	N Female	N Female	N Female

Werlatone® Broadband Dual, Uni, and Bi Directional RF Couplers are designed to tolerate the most stringent operating conditions associated with military and EMC testing environments. Many of our RF Directional Couplers, designated Mismatch Tolerant®, will operate continuously, at rated power, into a severe load mismatch condition. Our multi-octave Directional Couplers maintain exceptional coupling flatness, directivity, VSWR, and insertion loss.



WERLATONE

Model C5768

Connectorized Directional Couplers




PRODUCT DATA SHEET


C5768

Performance Data (Specifications subject to change without notice):


Coupling:

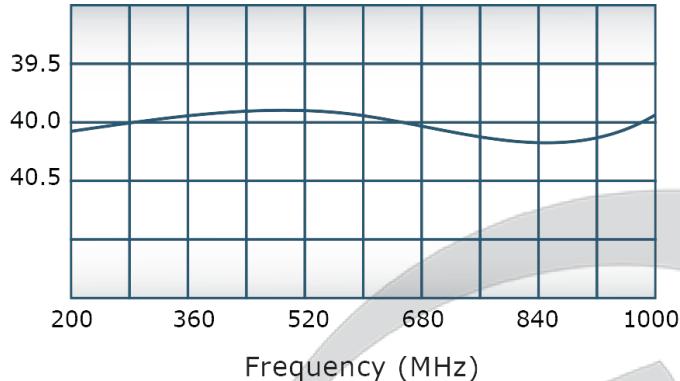


VSWR:

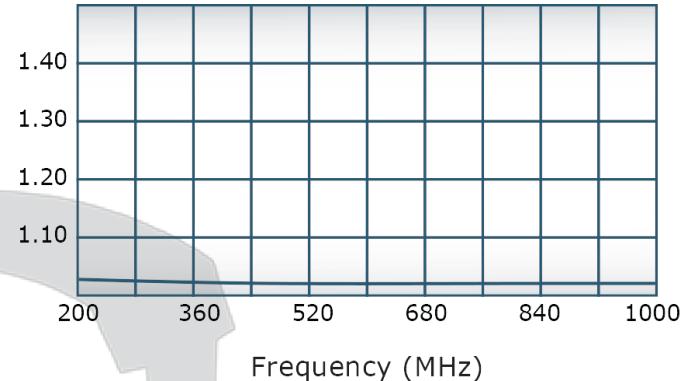

Insertion Loss:

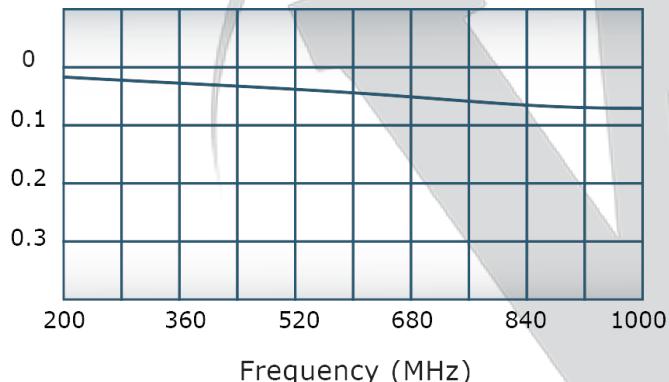

Directivity:

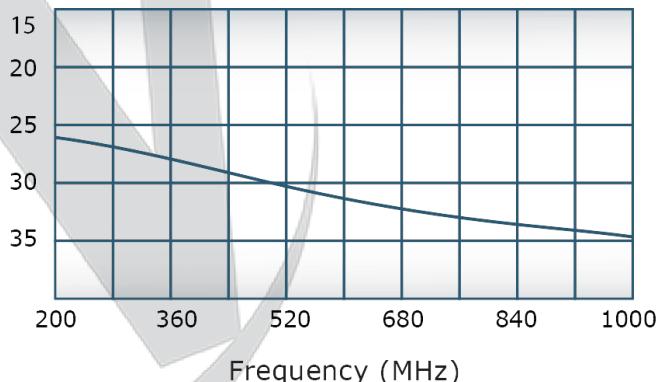

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com


4

3

2

1

**RESTRICTION ON USE, DUPLICATION OR
DISCLOSURE OF PROPRIETARY INFORMATION**
This document contains proprietary information
which is the sole property of Werlatone, Inc.

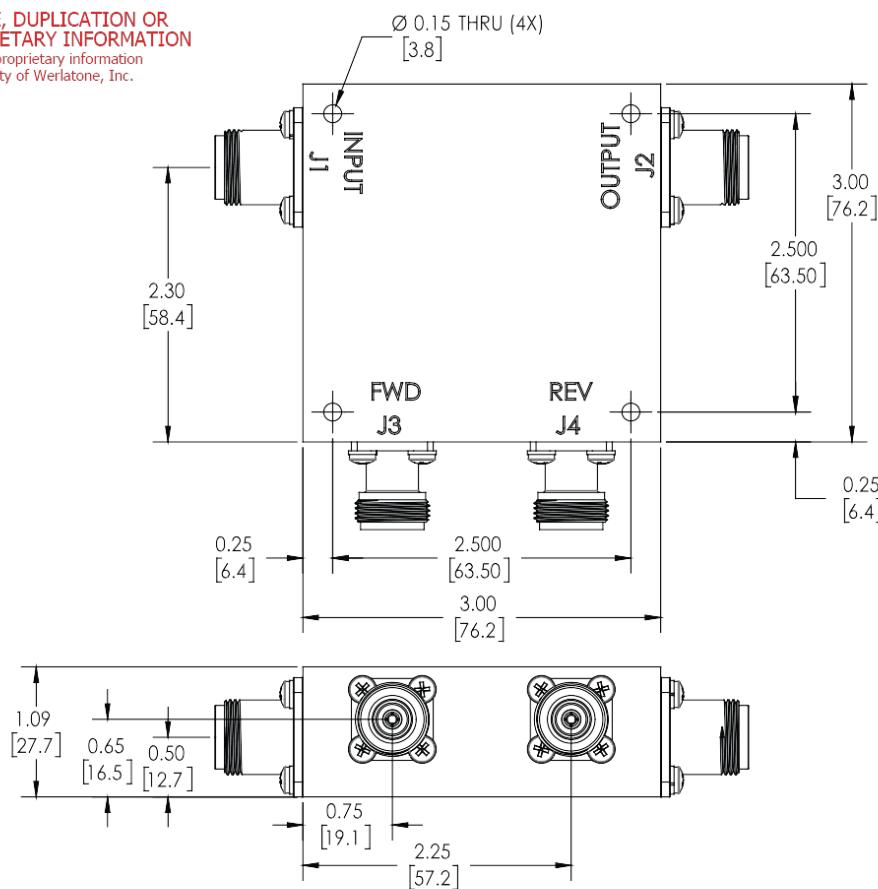

REVISION HISTORY

REV.	REVISION RECORD	DATE	APPROVED
A	ECN 9696	11/27/18	RB

NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL: ALUMINUM 6061-T6
2. FINISH: CHEM FILM PER MIL-DTL-5541F TYPE I CLASS 3 (YELLOW IRIDITE)

UNLESS OTHERWISE SPECIFIED	OWN	DATE	17 Jon Barrett Rd
	RH	7/5/2001	Patterson, NY 12563
WERLATONE SINCE 1965			
• INTERPRET DRAWING DAW MIL-STD-100	CHK	DATE	
• ENDURANCE PER ASME B1.5M-2009			
• PARALLELISM TOLERANCE FOR REF ONLY	ENGR	DATE	
• DIMENSIONAL ARE IN INCHES	MFGR	DATE	
• TOLERANCE	QA	DATE	
• ANGLES ± 2°	PLSE	DATE	
3 AL + 1/16 [1.2]			
2 AL + 0.031 [0.8]			
• REMOVE ALL BURRS AND SHARP EDGES R.01 MAX			
• CONCENTRICITY MACHINED 0.042 0.022 IN			
• MACHINE TOOL MISMATCH 0.03 MAX			
NEXT ASSY	USED ON	APPLICATION	OUTLINE
		THIRD ANGLE PROJECTION	SHEET 1 OF 1
			REV. A
			SCALE 1:1

4

3

2

1

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com