
PRODUCT DATA SHEET
C5954

4-Port Dual Directional Coupler employs two, 3-Port Uni-Directional Couplers, internally connected, in tandem, providing measurement of both forward and reverse power. Ideal for simultaneously monitoring a system's forward and reverse power and for reflectometer measurements. Unlike the Bi-Directional Coupler, the directivity of the Dual Directional Coupler is unaffected by the loads on the coupled ports.

Features:

High Power Wide Bandwidths Small Size Flat Coupling Custom Designs Available

Electrical Specifications:

Frequency: 10 - 200 MHz
Power: 10,000 W CW
Coupling: 60 ± 1.0 dB Max.
Insertion Loss: 0.1 dB Max.
Flatness: ± 0.5 dB Max.
VSWR (ML): 1.10:1 Max.
Directivity: 25 dB Min.

Mechanical Specifications:

Type: Connectorized
Material: Aluminum 6061-T6
Surface Finish: Chem. Film Per MIL-DTL-5541F Type I
Class 3 (Yellow Iridite) RoHS Compliant
Available
Operating Temperature: -55°C to +75°C
Storage Temperature: -60°C to +85°C
Humidity: 95% Non-Condensing
Size: 6.0 x 3.0 x 2.24"

Connector Configurations:


Model	Input (J1)	Output (J2)	Fwd (J3)	Rev (J4)
C5954-20*	7/16 Female	7/16 Female	N Female	N Female
C5954-23*	7/16 Female	7/16 Female	BNC	BNC
C5954-30	LC Female	LC Female	N Female	N Female
C5954-32	LC Female	LC Female	SMA	SMA
C5954-33	LC Female	LC Female	BNC	BNC
C5954-61**	HN Female	HN Female	N Female	N Female
C5954-63**	HN Female	HN Female	SMA	SMA
C5954-64**	HN Female	HN Female	BNC	BNC
C5954-501	SQS Female	SQS Female	N Female	N Female
C5954-503	SQS Female	SQS Female	BNC	BNC
C5954-QC-0	QC Block	QC Block	N Female	N Female

* Power Rating is decreased to 5,000 W CW with 7/16 Mainline Connectors. **Unit dimensions are 6.0 x 3.0 x 2.25"



WERLATONE

Model C5954

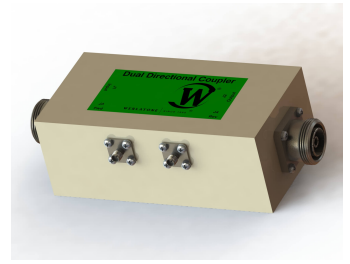


PRODUCT DATA SHEET


C5954

Performance Data (Specifications subject to change without notice):


Coupling:

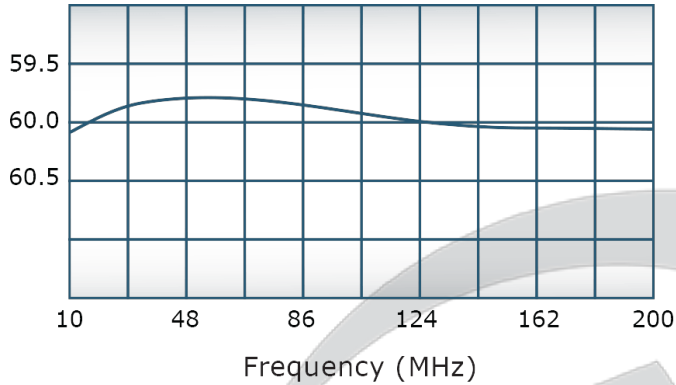


VSWR:

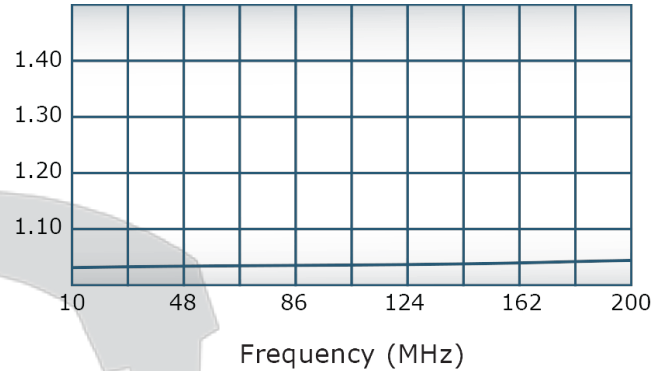

Insertion Loss:

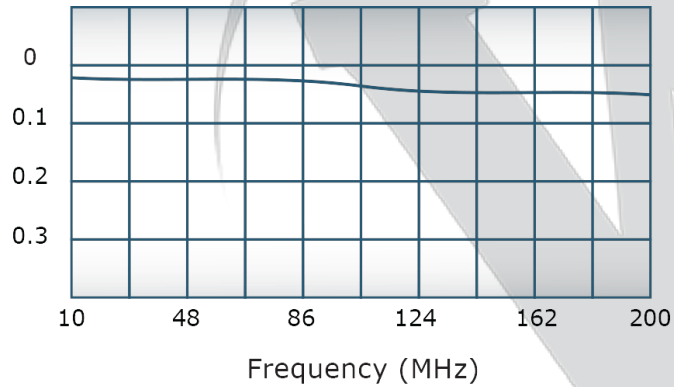


Directivity:

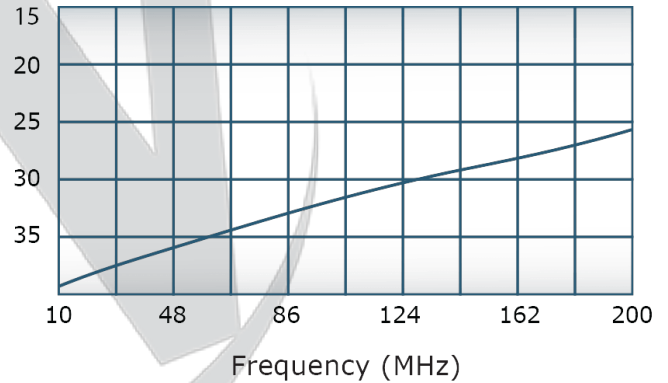

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

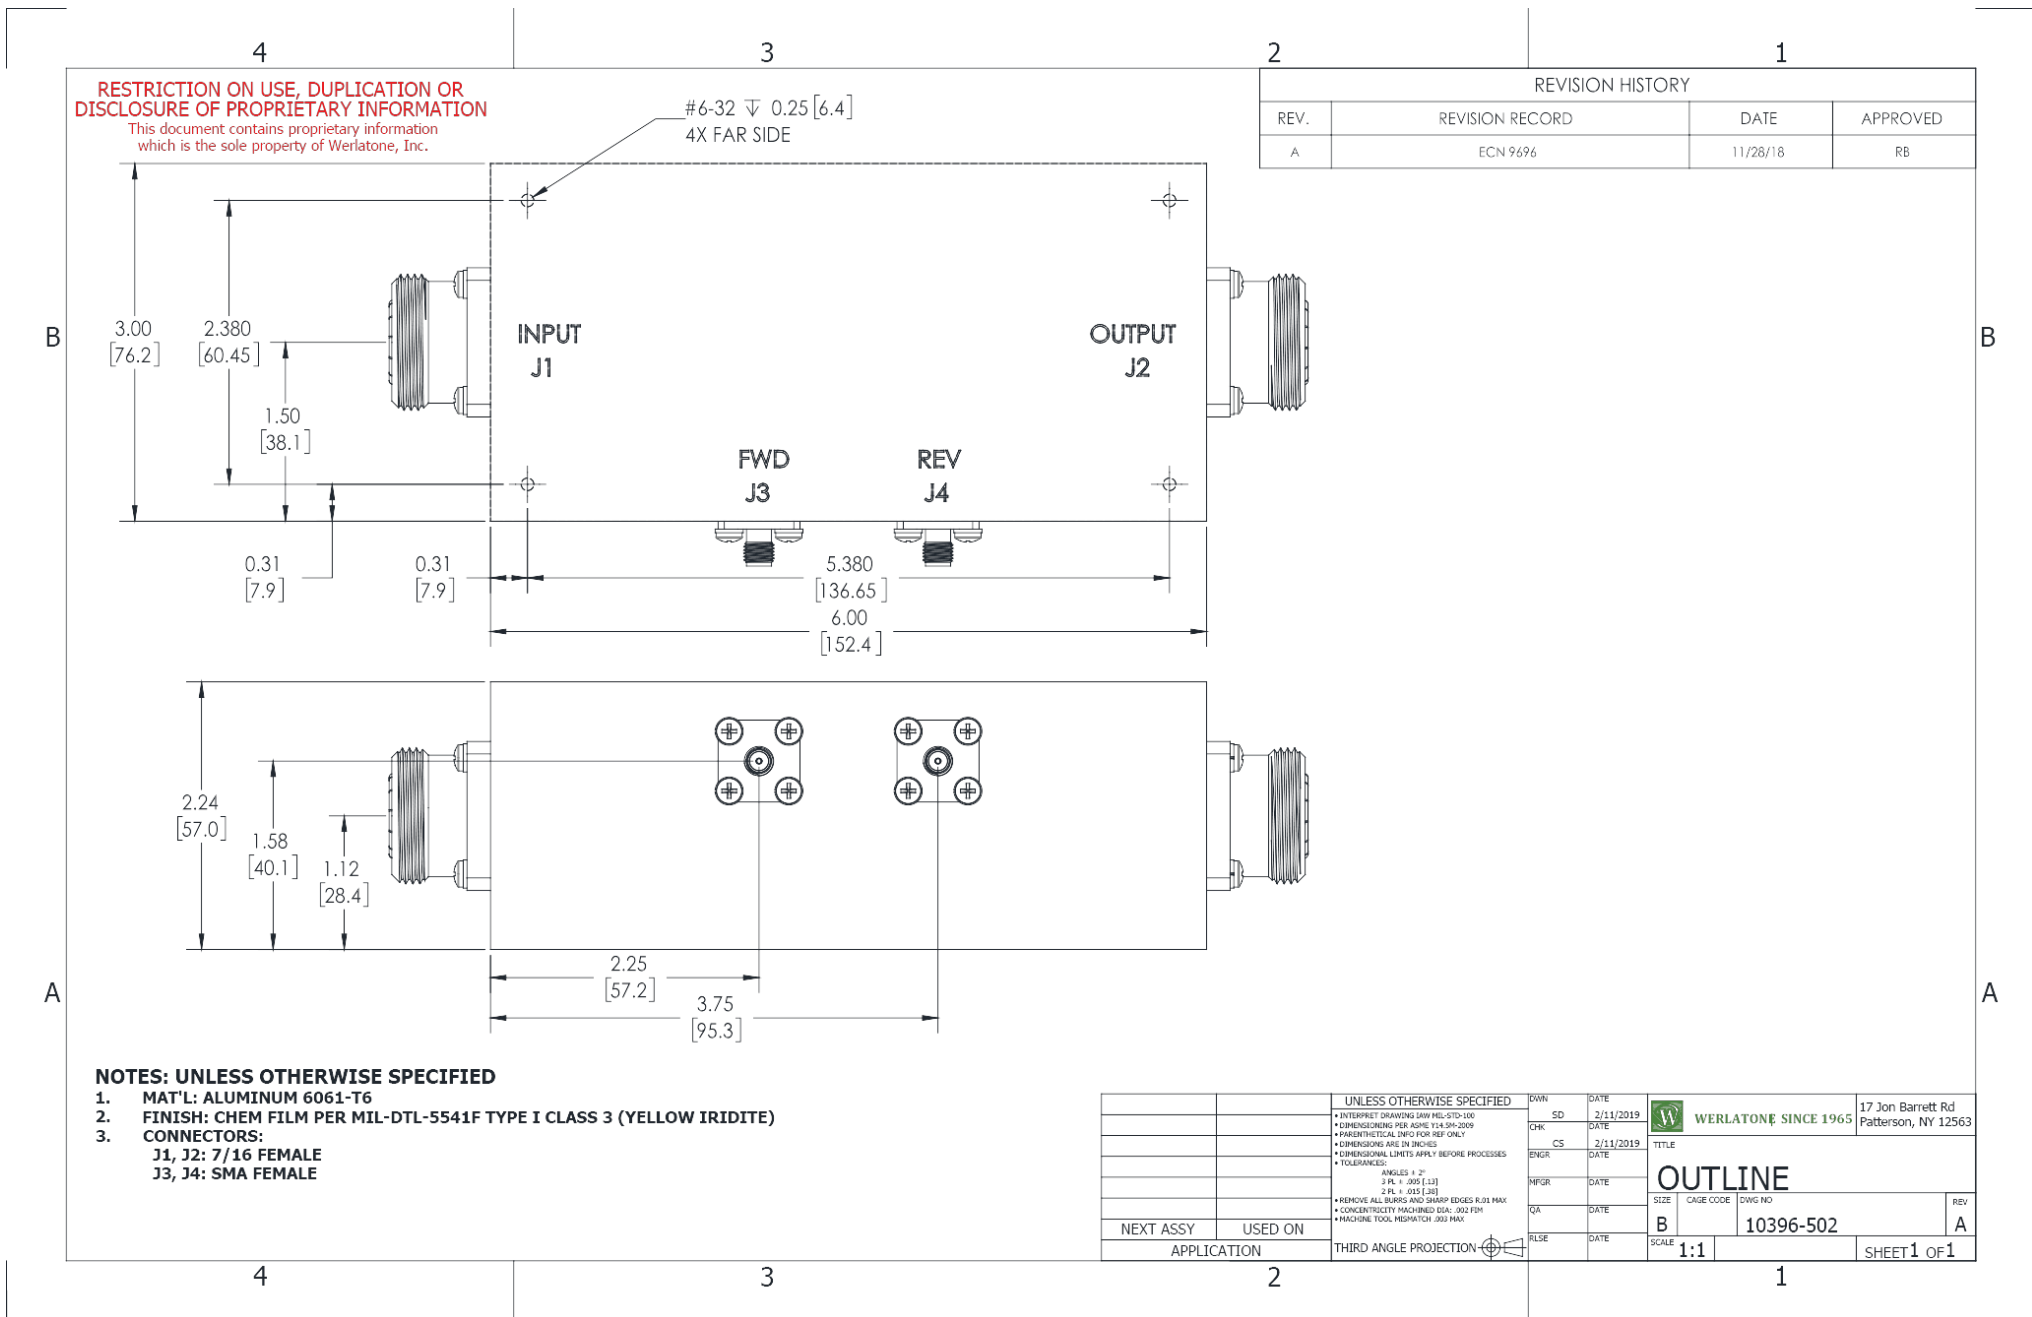

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com