



PRODUCT DATA SHEET C6413

4-Port Dual Directional Coupler employs two, 3-Port Uni-Directional Couplers, internally connected, in tandem, providing measurement of both forward and reverse power. Ideal for simultaneously monitoring a system's forward and reverse power and for reflectometer measurements. Unlike the Bi-Directional Coupler, the directivity of the Dual Directional Coupler is unaffected by the loads on the coupled ports.

Features:

High Power Wide Bandwidths Small Size Flat Coupling Custom Designs Available

Electrical Specifications:

Frequency: 1 - 50 MHzPower: 10,000 W CWCoupling: $70 \pm 1.0 \text{ dB Max}$.
Insertion Loss: 0.05 dB Max.
Flatness: $\pm 0.5 \text{ dB Max}$.
VSWR (ML): 1.10:1 Max.
Directivity: 25 dB Min.

Mechanical Specifications:

Type: Connectorized Material: Aluminum 6061-T6

Surface Finish: Chem. Film Per MIL-DTL-5541F Type I

Class 3 (Yellow Iridite) RoHS Compliant

Available

Operating Temperature: -55°C to +75°C
Storage Temperature: -60°C to +85°C
Humidity: 95% Non-Condensing

Size: 6.0 x 3.0 x 2.24"

Connector Configurations:

Model	Input (J1)	Output (J2)	Fwd (J3)	Rev (J4)
C6413-30	LC Female	LC Female	N Female	N Female
C6413-32	LC Female	LC Female	SMA Female	SMA Female
C6413-33	LC Female	LC Female	BNC	BNC
C6413-501	SQS Female	SQS Female	N Female	N Female
C6413-503	SQS Female	SQS Female	BNC	BNC
C6413-730	LC Male	LC Male	N Female	N Female
C6413-7501	SQS Male	SQS Female	N Female	N Female
C6413-7503	SQS Male	SQS Female	BNC	BNC
C6413-7505	SQS Female	SQS Male	BNC	BNC

Werlatone® Broadband Dual, Uni, and Bi Directional RF Couplers are designed to tolerate the most stringent operating conditions associated with military and EMC testing environments. Many of our RF Directional Couplers, designated Mismatch Tolerant®, will operate continuously, at rated power, into a severe load mismatch condition. Our multi-octave Directional Couplers maintain exceptional coupling flatness, directivity, VSWR, and insertion loss.

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.





PRODUCT DATA SHEET C6413

Performance Data (Specifications subject to change without notice):

Coupling:


69.5

70.0


70.5

1 10 20 30 40 50


Frequency (MHz)




Insertion Loss:

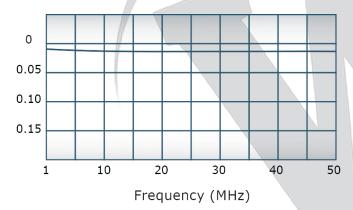





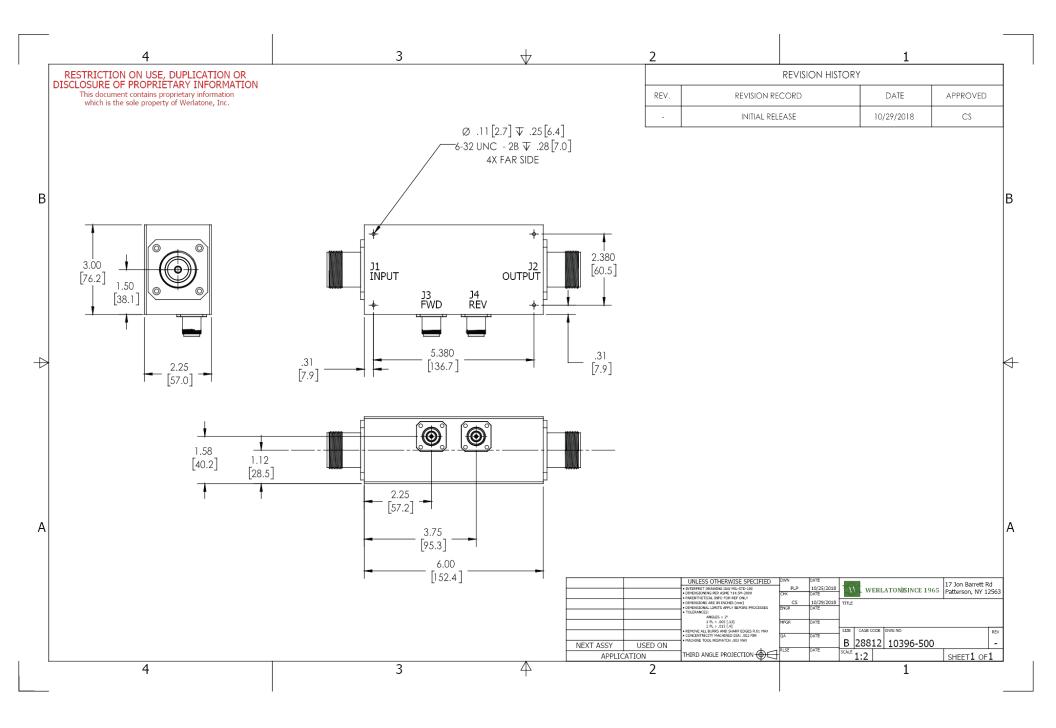

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com