

PRODUCT DATA SHEET

C7020

4-Port Dual Directional Coupler employs two, 3-Port Uni-Directional Couplers, internally connected, in tandem, providing measurement of both forward and reverse power. Ideal for simultaneously monitoring a system's forward and reverse power and for reflectometer measurements. Unlike the Bi-Directional Coupler, the directivity of the Dual Directional Coupler is unaffected by the loads on the coupled ports.

Features:

High Power Wide Bandwidths Small Size Flat Coupling Custom Designs Available

Electrical Specifications:

Frequency: 127 - 129 MHz
 Power: 2000 W CW
 Coupling: 60 ± 1.0 dB Max.
 Insertion Loss: 0.15 dB Max.
 Flatness: ± 0.5 dB Max.
 VSWR (ML): 1.15:1 Max.
 Directivity: 25 dB Min.


Mechanical Specifications:

Type: Connectorized
 Material: Aluminum 6061-T6
 Surface Finish: Chem. Film Per MIL-DTL-5541F
 Type I Class 3 (Yellow Iridite)
 RoHS Compliant Available
 Operating Temperature: -55°C to +75°C
 Storage Temperature: -60°C to +85°C
 Humidity: 95% Non-Condensing
 Size: 3.0 X 3.0 X 1.59"

Connector Configurations:

Model	Input (J1)	Output (J2)	Fwd (J3)	Rev (J4)
C7020-20	7/16 Female	7/16 Female	N Female	N Female
C7020-22	7/16 Female	7/16 Female	SMA	SMA
C7020-23	7/16 Female	7/16 Female	BNC	BNC
C7020-729	7/16 Male	7/16 Female	BNC	BNC

Werlatone® Broadband Dual, Uni, and Bi Directional RF Couplers are designed to tolerate the most stringent operating conditions associated with military and EMC testing environments. Many of our RF Directional Couplers, designated Mismatch Tolerant®, will operate continuously, at rated power, into a severe load mismatch condition. Our multi-octave Directional Couplers maintain exceptional coupling flatness, directivity, VSWR, and insertion loss.

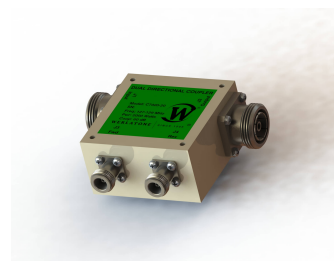


PRODUCT DATA SHEET


C7020

Performance Data (Specifications subject to change without notice):


Coupling:

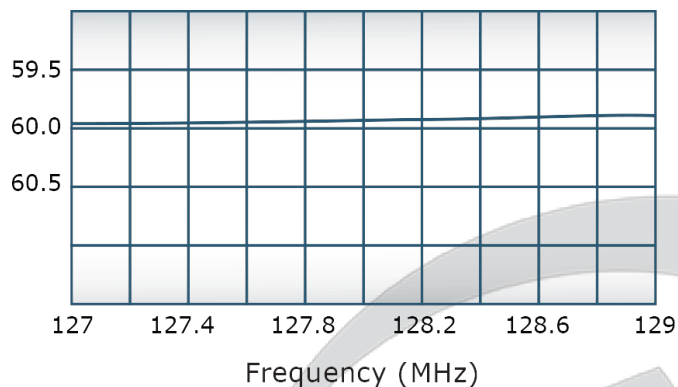


VSWR:

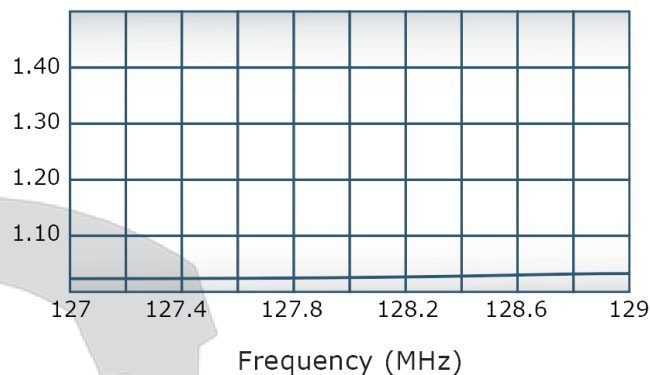

Insertion Loss:

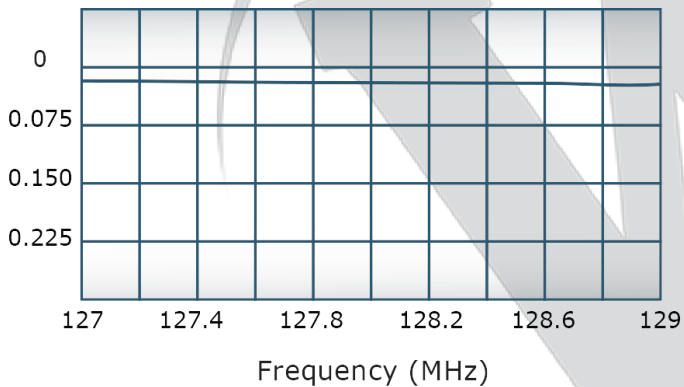


Directivity:

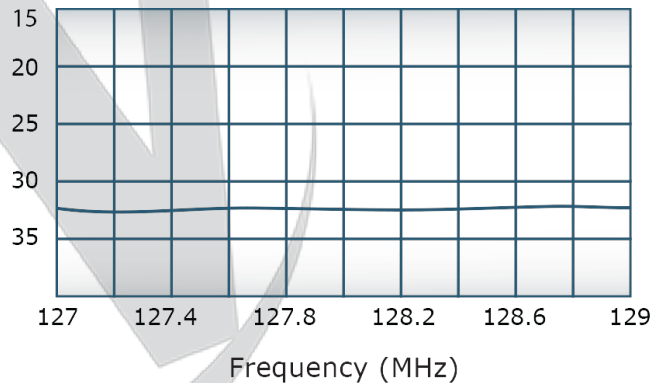

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION
This document contains proprietary information which is the sole property of Werlatone, Inc.

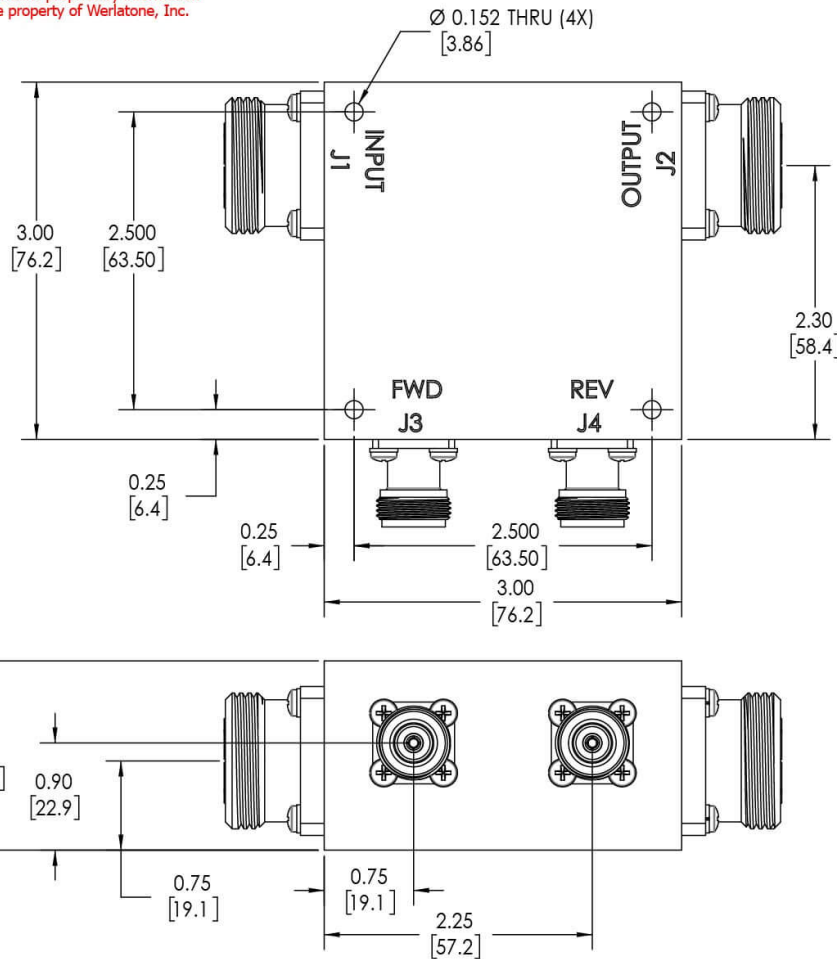

REVISION HISTORY			
REV.	REVISION RECORD	DATE	APPROVED
A	ECN 9696	5/13/2019	RB

NOTES: UNLESS OTHERWISE SPECIFIED

- MATERIAL: ALUMINUM 6061-T6**
- FINISH: CHEM FILM PER MIL-DTL-5541F CLASS I TYPE 3 (YELLOW IRIDITE)**
- CONNECTORS:**
J1, J2: 7/16 FEMALE
J3, J4: N FEMALE

<div>UNLESS OTHERWISE SPECIFIED</div> <div>INTERPRET DRAWING IN ACCORDANCE WITH MIL-STD-100</div> <div>DIMENSIONS FOR ASME Y14.5M-2009</div> <div>PARENTHESES ARE FOR REF ONLY</div> <div>DIMENSIONS ARE IN INCHES</div> <div>DIMENSIONAL LIMITS APPLY BEFORE PROCESSES</div> <div>TOLERANCES:</div> <div> ANGLES ± 2°</div> <div> 3 PL ± .005 [13]</div> <div> 2 PL ± .015 [38]</div> <div>REMOVE ALL BURRS AND SHARP EDGES R.01 MAX</div> <div>CONCENTRICITY MACHINED DIA. .002 FIM</div> <div>MACHINE TOOL MISMATCH .003 MAX</div>		OWN	DATE	<div><div><div><div></div></div><div>WERLATONE</div><div>SINCE 1965</div></div><div>17 Jon Barrett Rd Patterson, NY 12563</div></div>
		SD	5/13/2019	
		CHK	DATE	
		CS	5/13/2019	
		ENGR	DATE	
		INFR	DATE	
		QA	DATE	
		RLSE	DATE	
		THIRD ANGLE PROJECTION		
		APPLICATION		
NEXT ASSY	USED ON	TITLE		REV
		B 10443-501		A
		SCALE 1:1		SHEET 1 OF 1

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com