

**3-Port Uni-Directional Coupler:** Consists of a main line and a coupled line. One end of the coupled line is internally terminated, while the other end serves as a coupled port. Ideal for sampling and monitoring power in one direction at a given time. It is necessary to physically reverse the orientation of the unit to change from a forward to a reverse power measurement.

**Features:**

High Power      Wide Bandwidths      Small Size      Flat Coupling      Custom Designs Available

**Electrical Specifications:**

Frequency:            100 - 1000 MHz  
 Power:                100 W CW  
 Coupling:             10 ± 1.0 dB Max.  
 Insertion Loss:       0.5 dB Max.  
 Flatness:              ± 1.0 dB Max.  
 VSWR (ML):          1.20:1 Max.  
 Directivity:           17 dB Min.

**Mechanical Specifications:**

Type:                    Connectorized  
 Material:               Aluminum 6061-T6  
 Surface Finish:        Chem. Film Per MIL-DTL-5541F  
                               Type I Class 3 (Yellow Iridite)  
                               RoHS Compliant Available  
 Operating Temperature: -55°C to +75°C  
 Storage Temperature: -60°C to +85°C  
 Humidity:              Watertight, 100% Condensing  
 Size:                    7.05 x 3.03 x 1.2"  
 Weight:                 2 lbs.

**Connector Configurations:**


Model	Input (J1)	Output (J2)	Fwd (J3)
C9271W-10	N Female	N Female	N Female
C9271W-12	N Female	N Female	SMA
C9271W-102	SMA	SMA	SMA

**Werlatone®** Broadband Dual, Uni, and Bi Directional RF Couplers are designed to tolerate the most stringent operating conditions associated with military and EMC testing environments. Many of our RF Directional Couplers, designated Mismatch Tolerant®, will operate continuously, at rated power, into a severe load mismatch condition. Our multi-octave Directional Couplers maintain exceptional coupling flatness, directivity, VSWR, and insertion loss.




## Performance Data (Specifications subject to change without notice):


Coupling:

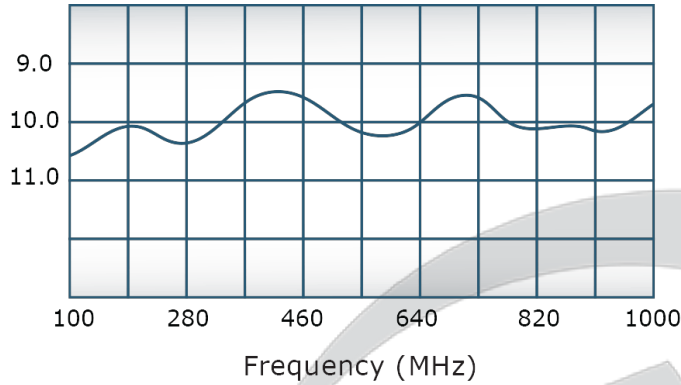


VSWR:

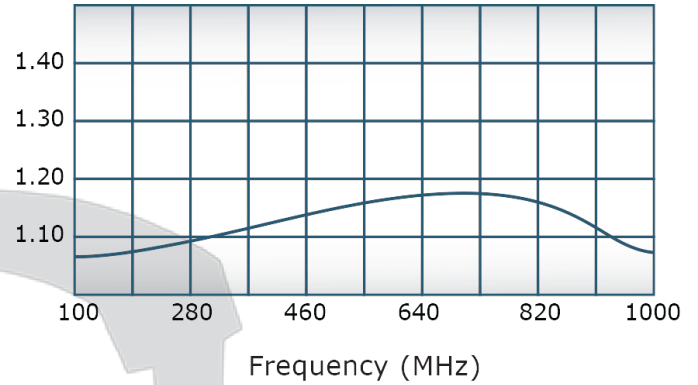

Insertion Loss:

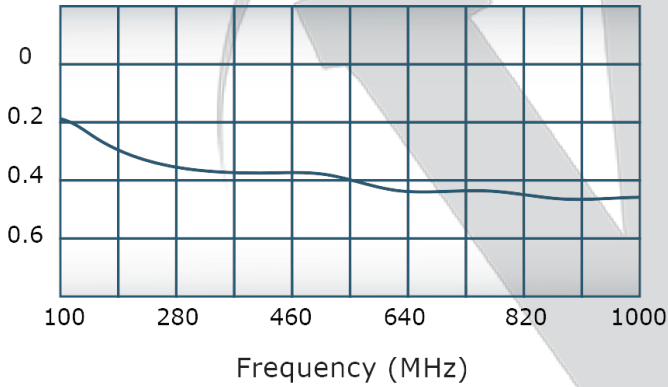

Directivity:



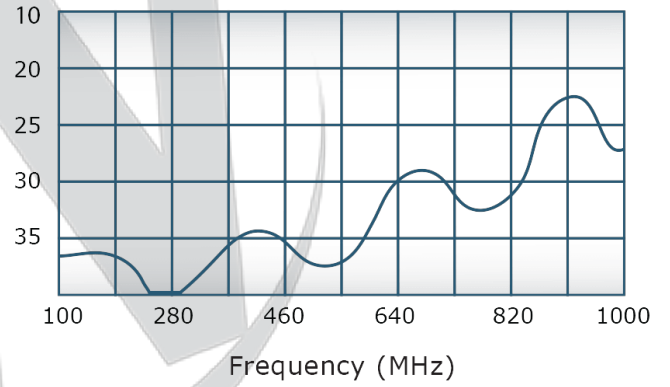


Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

**RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION**  
 This document contains proprietary information which is the sole property of Werlatone, Inc.

REVISIONS			
REV.	REVISION RECORD	DATE	APPROVED
A	ECN: 5677	6/7/2012	SC

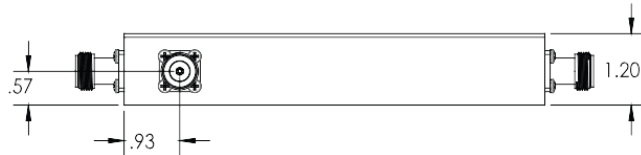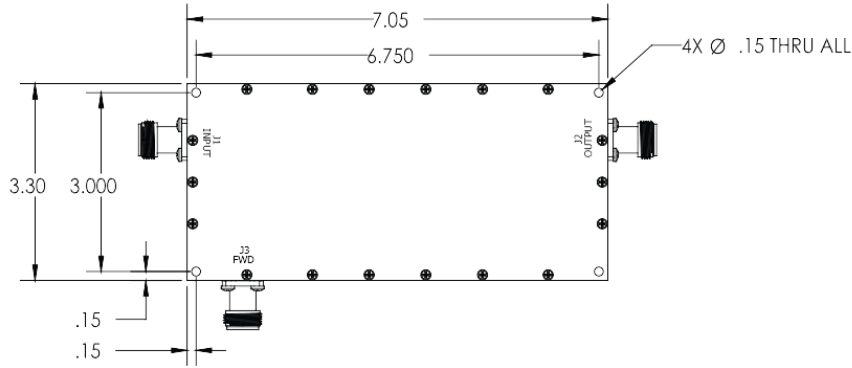

UNLESS OTHERWISE SPECIFIED	DWN	DATE	SC	6/7/2012	<b>WERLATONE</b> SINCE 1965 17 Jon Barrett Rd Patterson, NY 12563
<ul style="list-style-type: none"> <li>• INTERPRET DRAWING ACC. MFG. STEP 100</li> <li>• DIMENSIONS FOR ASME Y14.5M-2009</li> <li>• PARENTHETICAL INFO FOR REF ONLY</li> <li>• DIMENSIONS ARE IN INCHES</li> <li>• DIMENSIONAL LIMITS APPLY BEFORE PROCESSES</li> <li>• TOLERANCES:               <ul style="list-style-type: none"> <li>ANGLES ± 2°</li> <li>3 PL ± .015</li> <li>2 PL ± .015</li> </ul> </li> <li>• REMOVE ALL BURRS AND SHARP EDGES R.01 MAX</li> <li>• CONCENTRICITY MACHINED DIA: .003 FDM</li> <li>• MACHINE TOOL PREPARATION AND FINISH</li> </ul>	CHK	DATE	NH	6/7/2012	
	ENGR	DATE	SW	6/7/2012	TITLE
	APPR	DATE			<b>C9271W-10B</b>
	QA	DATE			SIZE CAGE CODE DWG NO
	RESE	DATE			<b>B 28812 20865-500</b>
					SCALE 1:2
					SHEET 1 OF 1

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.  
 Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com