

**PRODUCT DATA SHEET**
**C9271W**

**3-Port Uni-Directional Coupler:** Consists of a main line and a coupled line. One end of the coupled line is internally terminated, while the other end serves as a coupled port. Ideal for sampling and monitoring power in one direction at a given time. It is necessary to physically reverse the orientation of the unit to change from a forward to a reverse power measurement.

**Features:**

High Power      Wide Bandwidths      Small Size      Flat Coupling      Custom Designs Available

**Electrical Specifications:**

Frequency: 100 - 1000 MHz  
Power: 100 W CW  
Coupling:  $10 \pm 1.0$  dB Max.  
Insertion Loss: 0.5 dB Max.  
Flatness:  $\pm 1.0$  dB Max.  
VSWR (ML): 1.20:1 Max.  
Directivity: 17 dB Min.

**Mechanical Specifications:**

Type: Connectorized  
Material: Aluminum 6061-T6  
Surface Finish: Chem. Film Per MIL-DTL-5541F  
Type I Class 3 (Yellow Iridite)  
RoHS Compliant Available  
Operating Temperature: -55°C to +75°C  
Storage Temperature: -60°C to +85°C  
Humidity: Watertight, 100% Condensing  
Size: 7.05 x 3.03 x 1.2"  
Weight: 2 lbs.

**Connector Configurations:**

Model	Input (J1)	Output (J2)	Fwd (J3)
C9271W-10	N Female	N Female	N Female
C9271W-12	N Female	N Female	SMA
C9271W-102	SMA	SMA	SMA

**Werlatone®** Broadband Dual, Uni, and Bi Directional RF Couplers are designed to tolerate the most stringent operating conditions associated with military and EMC testing environments. Many of our RF Directional Couplers, designated Mismatch Tolerant®, will operate continuously, at rated power, into a severe load mismatch condition. Our multi-octave Directional Couplers maintain exceptional coupling flatness, directivity, VSWR, and insertion loss.




## PRODUCT DATA SHEET


C9271W

### Performance Data (Specifications subject to change without notice):


Coupling:

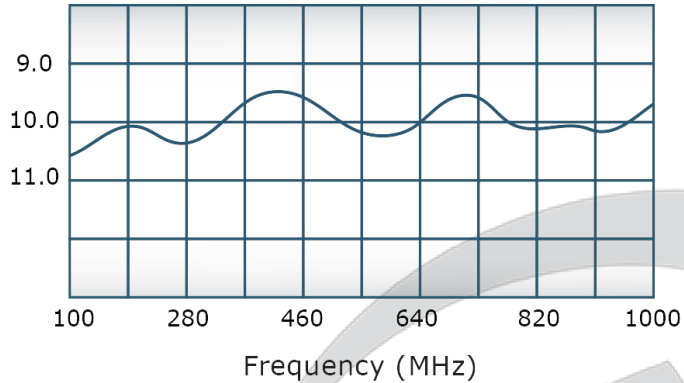


VSWR:

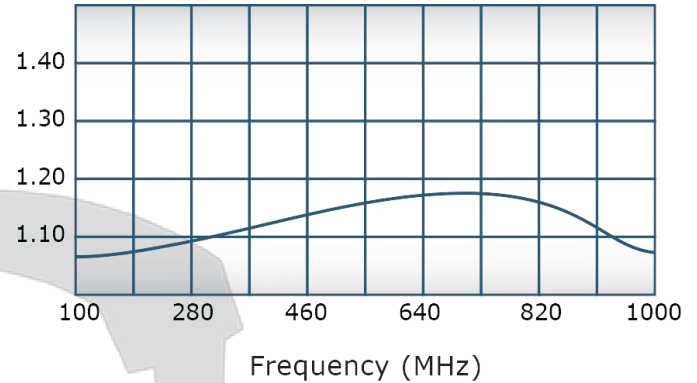

Insertion Loss:

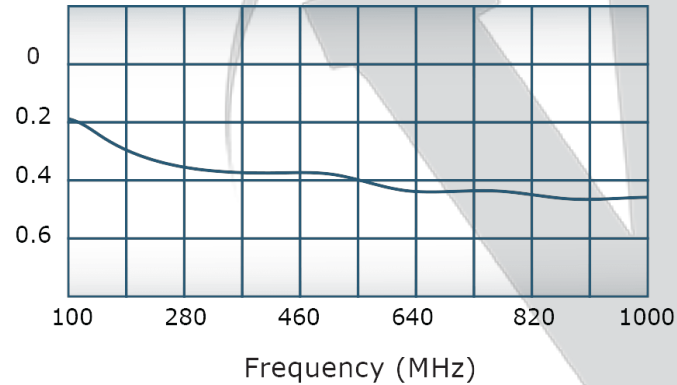




Directivity:

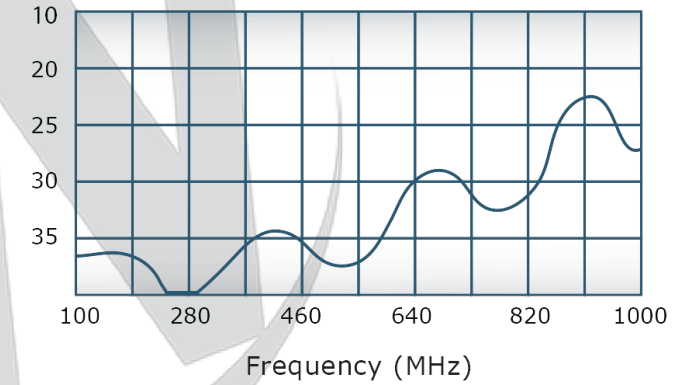


Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

**RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION**  
This document contains proprietary information which is the sole property of Werlatone, Inc.

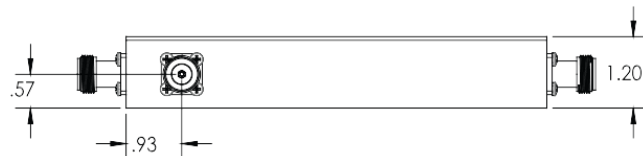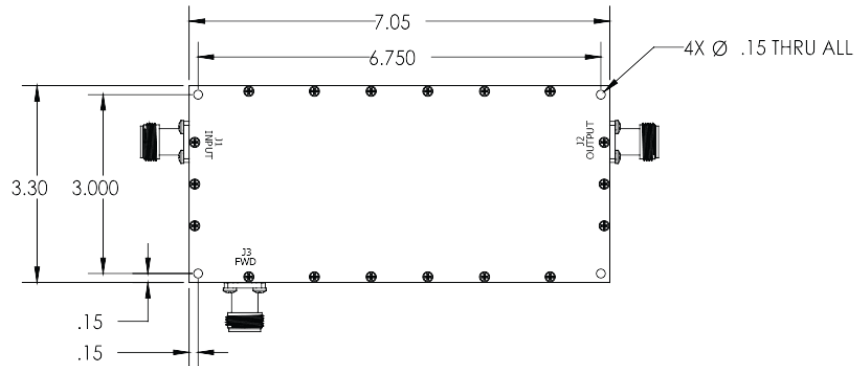

REVISIONS			
REV.	REVISION RECORD	DATE	APPROVED
A	ECN: 5677	6/7/2012	SC

		UNLESS OTHERWISE SPECIFIED		DWN	DATE	 <b>WERLATONE</b> SINCE 1965	17 Jon Barrett Rd Patterson, NY 12563		
		• INTERPRET DRAWING IN ACCORDANCE WITH MIL-STD-883C		SC	6/7/2012				
		• CONFORM TO ASME Y14.5M-2009		CHK	DATE				
		• PARENT/CHILD INFO FOR REF ONLY		NH	6/7/2012				
		• CONFORM TO ALL DIMENSIONS ARE IN INCHES		ENGR	DATE				
		• CONFORM TO ALL DIMENSIONS APPLY BEFORE PROCESSING		BW	6/7/2012				
		• TOLERANCES:		APPGR	DATE				
		ANGLES ± .2°		QA	DATE				
		3 PL ± .005				SIZE	CAGE CODE	DWG NO	REV
		2 PL ± .015				B 28812		20865-500	A
		• REMOVE ALL BURRS AND SHARP EDGES R.01 MAX				SCALE	1:2		
		• CONCENTRICITY MACHINED DIA. .002 FDM				SHEET 1 OF 1			
		• MACHINE TOOL PREPARATION .001 FDM							
C9271W-10B		REWORK OTHERWISE SPECIFIED		THIRD ANGLE PROJECTION					
NEXT ASSY		USED ON							
APPLICATION									

**Restriction on use, duplication, or disclosure of proprietary information.** This document contains proprietary information which is the sole property of Werlatone, Inc.  
Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com