
PRODUCT DATA SHEET
C9446

4-Port Dual Directional Coupler employs two, 3-Port Uni-Directional Couplers, internally connected, in tandem, providing measurement of both forward and reverse power. Ideal for simultaneously monitoring a system's forward and reverse power and for reflectometer measurements. Unlike the Bi-Directional Coupler, the directivity of the Dual Directional Coupler is unaffected by the loads on the coupled ports.

Features:

High Power Wide Bandwidths Small Size Flat Coupling Custom Designs Available

Electrical Specifications:

Frequency: 20 - 1000 MHz
 Power: 250 W CW
 Coupling: 40 ± 1.0 dB Max.
 Insertion Loss: 0.5 dB Max.
 Flatness: ± 0.5 dB Max.
 VSWR (ML): 1.30:1 Max.
 Directivity: 20 dB Min.

Mechanical Specifications:

Type: Connectorized
 Material: Aluminum 6061-T6
 Surface Finish: Chem. Film Per MIL-DTL-5541F
 Type I Class 3 (Yellow Iridite)
 RoHS Compliant Available
 Operating Temperature: -55°C to +75°C
 Storage Temperature: -60°C to +85°C
 Humidity: 95% Non-Condensing
 Size: 3.0 x 2.0 x 1.0"


Connector Configurations:

Model	Input (J1)	Output (J2)	Fwd (J3)	Rev (J4)
C9446-10	N Female	N Female	N Female	N Female
C9446-12	N Female	N Female	SMA	SMA
C9446-13	N Female	N Female	BNC	BNC
C9446-301	TNC	TNC	N Female	N Female
C9446-714	N Male	N Male	N Female	N Female

Werlatone® Broadband Dual, Uni, and Bi Directional RF Couplers are designed to tolerate the most stringent operating conditions associated with military and EMC testing environments. Many of our RF Directional Couplers, designated Mismatch Tolerant®, will operate continuously, at rated power, into a severe load mismatch condition. Our multi-octave Directional Couplers maintain exceptional coupling flatness, directivity, VSWR, and insertion loss.

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

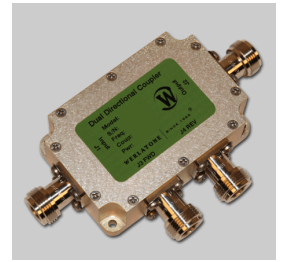


PRODUCT DATA SHEET


C9446

Performance Data (Specifications subject to change without notice):


Coupling:

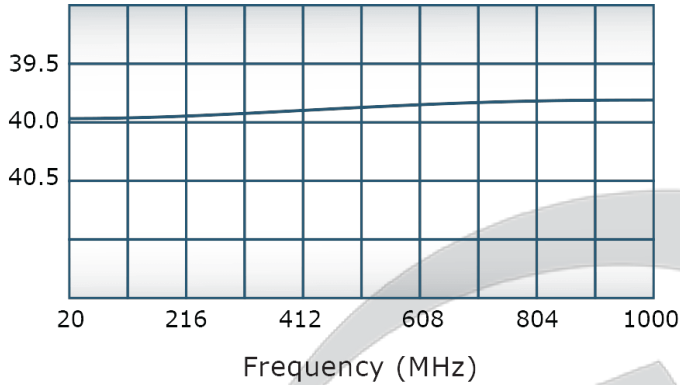


VSWR:

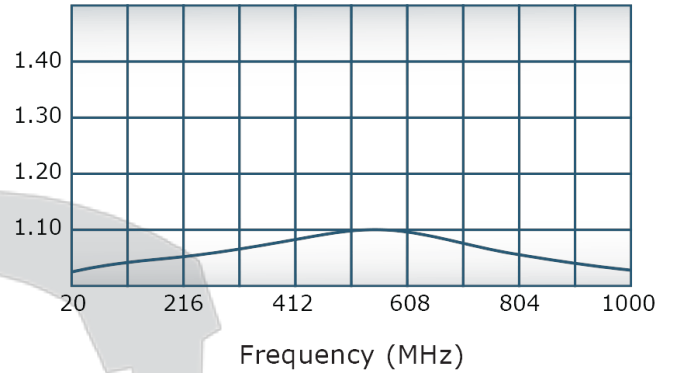

Insertion Loss:

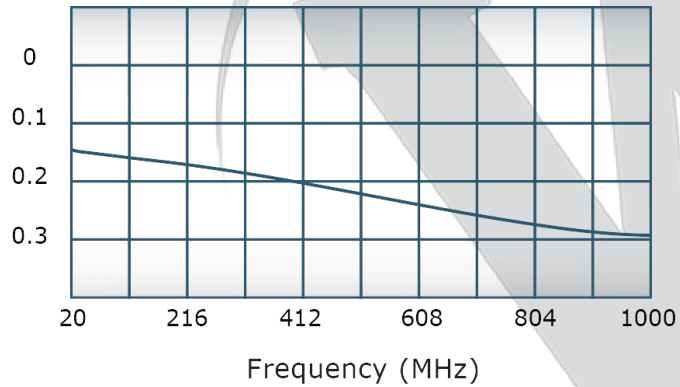

Directivity:


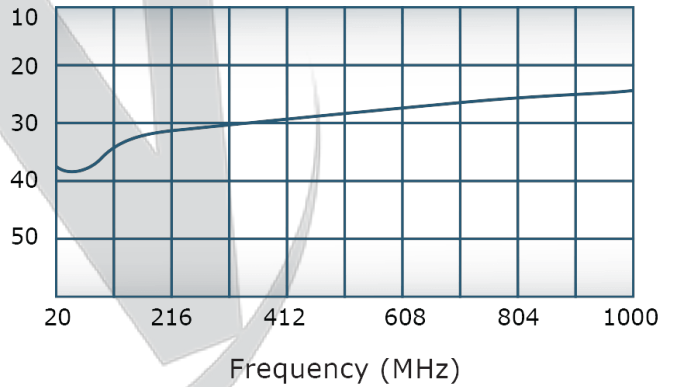


Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of


Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com


RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION
 This document contains proprietary information which is the sole property of Werlatone, Inc.

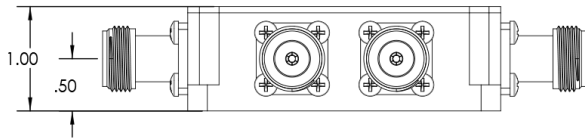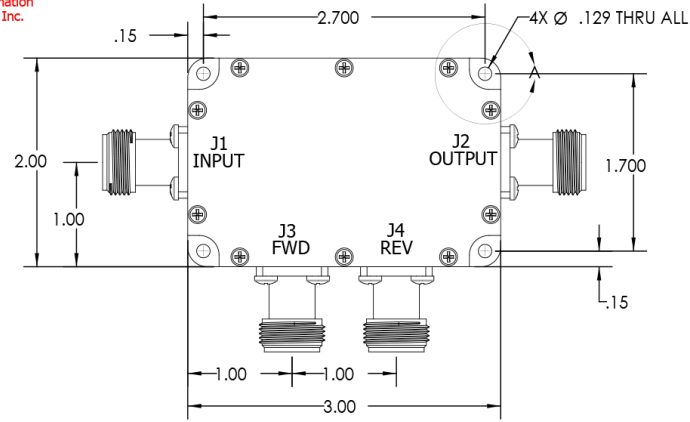

REVISIONS			
REV.	REVISION RECORD	DATE	APPROVED
-	INITIAL RELEASE	8/13/2012	



DETAIL A
SCALE 2 : 1

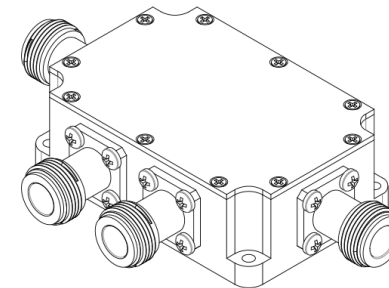

		UNLESS OTHERWISE SPECIFIED		OWN	DATE	 WERLATONE SINCE 1965	17 Jon Barrett Rd Patterson, NY 12563
		INTERPRET DRAWING IN ACCORDANCE WITH MIL-STD-100		SC	8/13/2012		
		DIMENSIONS ARE IN INCHES		CHK	DATE	TITLE	
		DIMENSIONS ARE IN INCHES		ENGR	DATE	OUTLINE	
		DIMENSIONAL LIMITS APPLY BEFORE PROCESSES		MPGR	DATE	SIZE CAGE CODE DWG NO	
		TOLERANCES:		QA	DATE	B 28812 20935-500	
		ANGLES = 3°		RELE	DATE	SCALE 1:1	
		3 PL ± .005					
		2 PL ± .015					
		REMOVE ALL BURRS AND SHARP EDGES R.01 MAX					
		CONCENTRICITY MACHINED DIA: .002 FPM					
		MACHINE TOOL MISMATCH: .003 MAX					
NEXT ASSY	USED ON	THIRD ANGLE PROJECTION		SHEET 1 OF 1			
APPLICATION							

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
 Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com