
PRODUCT DATA SHEET
C9552

4-Port Dual Directional Coupler employs two, 3-Port Uni-Directional Couplers, internally connected, in tandem, providing measurement of both forward and reverse power. Ideal for simultaneously monitoring a system's forward and reverse power and for reflectometer measurements. Unlike the Bi-Directional Coupler, the directivity of the Dual Directional Coupler is unaffected by the loads on the coupled ports.

Features:

High Power Wide Bandwidths Small Size Flat Coupling Custom Designs Available

Electrical Specifications:

Frequency: 20 - 1000 MHz
 Power: 150 W CW
 Coupling: 30 ± 1.0 dB Max.
 Insertion Loss: 0.8 dB Max.
 Flatness: ± 0.5 dB Max.
 VSWR (ML): 1.30:1 Max.
 Directivity: 20 dB Min.

Mechanical Specifications:

Type: Connectorized
 Material: Aluminum 6061-T6
 Surface Finish: Chem. Film Per MIL-DTL-5541F
 Type I Class 3 (Yellow Iridite)
 RoHS Compliant Available
 Operating Temperature: -55°C to +75°C
 Storage Temperature: -60°C to +85°C
 Humidity: 95% Non-Condensing
 Size: 3.0 x 2.0 x 1.0"


Connector Configurations:

Model	Input (J1)	Output (J2)	Fwd (J3)	Rev (J4)
C9552-10	N Female	N Female	N Female	N Female
C9552-12	N Female	N Female	SMA	SMA
C9552-102	SMA	SMA	SMA	SMA

Werlatone® Broadband Dual, Uni, and Bi Directional RF Couplers are designed to tolerate the most stringent operating conditions associated with military and EMC testing environments. Many of our RF Directional Couplers, designated Mismatch Tolerant®, will operate continuously, at rated power, into a severe load mismatch condition. Our multi-octave Directional Couplers maintain exceptional coupling flatness, directivity, VSWR, and insertion loss.


Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

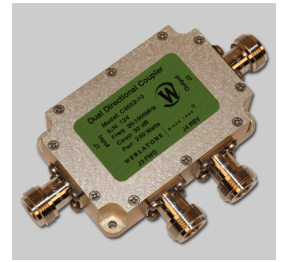


Performance Data (Specifications subject to change without notice):


Coupling:

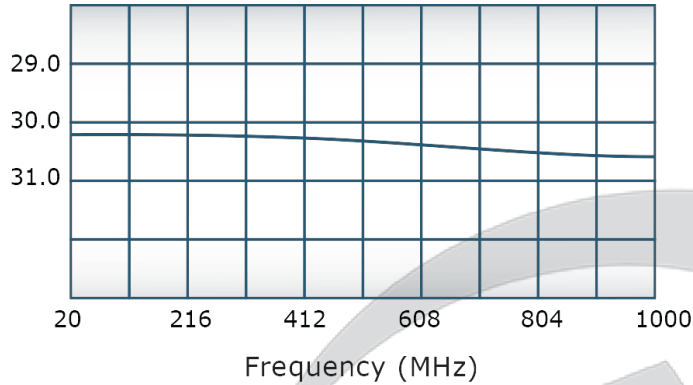


VSWR:

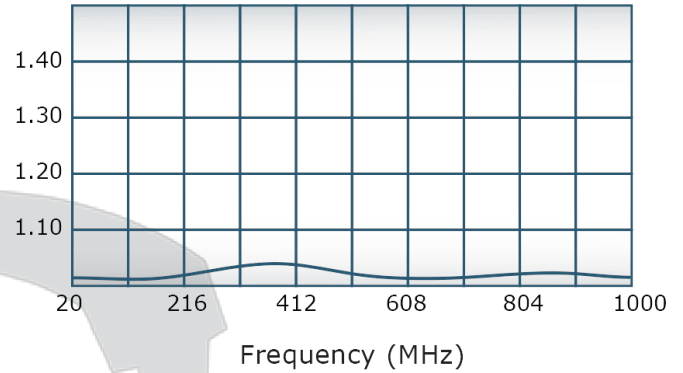

Insertion Loss:

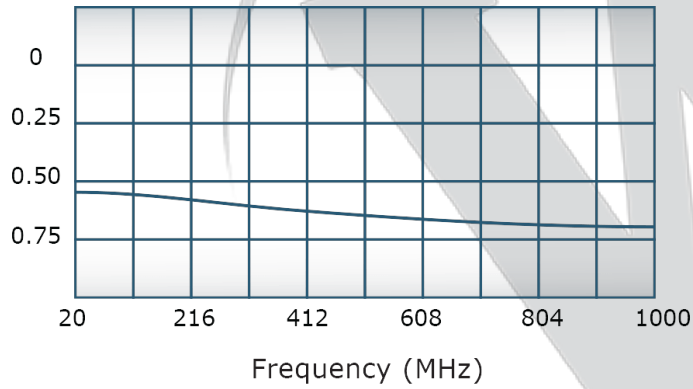

Directivity:

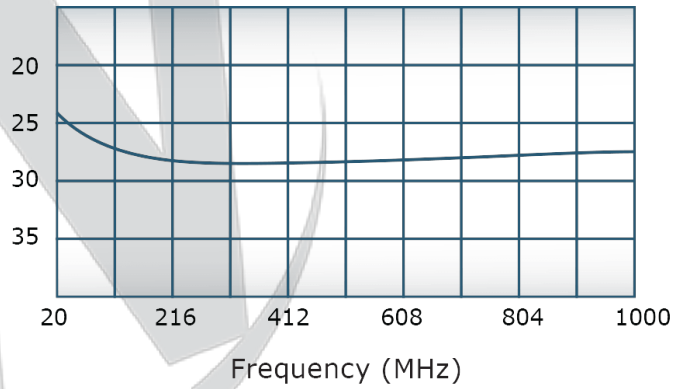




Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of

Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION
 This document contains proprietary information which is the sole property of Werlatone, Inc.

REVISION HISTORY			
REV	REVISION RECORD	DATE	APPROVED
	INITIAL RELEASE	8/31/2011	BW

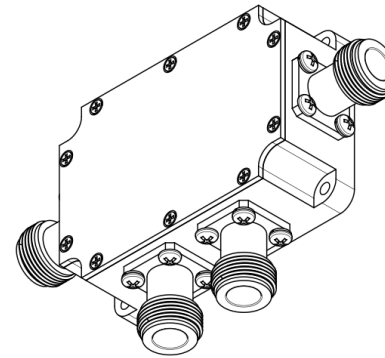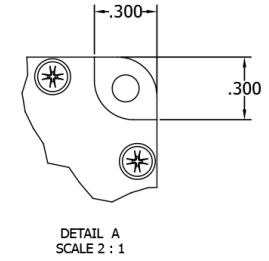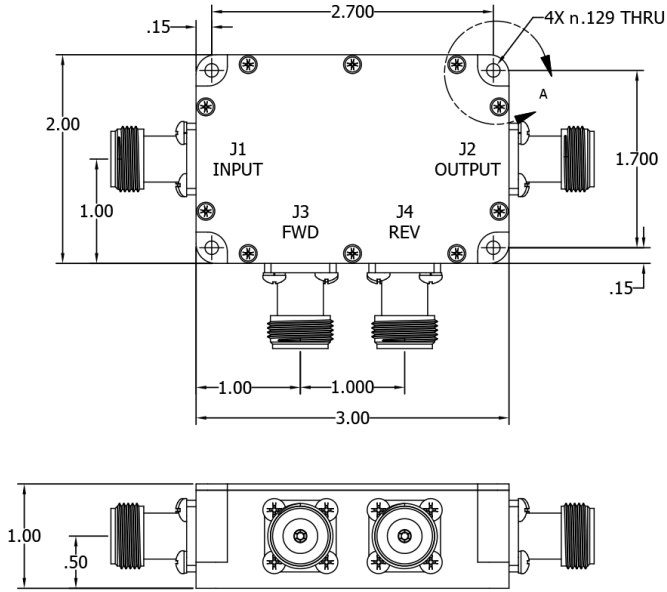

UNLESS OTHERWISE SPECIFIED		DWGN	DATE	WERLATONE SINCE 1965		17 Jon Barrett Rd Patterson, NY 12562	
• INTERPRET DRAWING LAW MIL-STD-100	• DIMENSIONING PER ASME Y14.5M-2009	CHK	DATE	TITLE		SIZE	CAGE CODE (DWG NO)
• DIMENSIONAL LIMITS APPLY BEFORE PROCESSING	• DIMENSIONS ARE IN INCHES	CS	DATE	B 2881221012-500		REV	-
• DIMENSIONAL LIMITS APPLY BEFORE PROCESSING	• TOLERANCES: ANGLES ±3°	ENGR	DATE	SCALE		SHEET 1 OF 1	
• DIMENSIONAL LIMITS APPLY BEFORE PROCESSING	• TOLERANCES: 3 PL. ± .005	MPGR	DATE	1:1			
• DIMENSIONAL LIMITS APPLY BEFORE PROCESSING	• TOLERANCES: 2 PL. ± .015	QA	DATE				
THIRD ANGLE PROJECTION		RLSE	DATE				

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
 Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com