



PRODUCT DATA SHEET

C9721

4-Port Dual Directional Coupler employs two, 3-Port Uni-Directional Couplers, internally connected, in tandem, providing measurement of both forward and reverse power. Ideal for simultaneously monitoring a system's forward and reverse power and for reflectometer measurements. Unlike the Bi-Directional Coupler, the directivity of the Dual Directional Coupler is unaffected by the loads on the coupled ports.

Features:

High Power Wide Bandwidths Small Size Flat Coupling Custom Designs Available

Electrical Specifications:

Frequency: 500 - 4000 MHz
 Power: 300 W CW
 Coupling: 40 ± 1.0 dB Max.
 Insertion Loss: 0.2 dB Max.
 Flatness: ± 0.75 dB Max.
 VSWR (ML): 1.30:1 Max.
 Directivity: 15 dB Min.

Mechanical Specifications:

Type: Connectorized
 Material: Aluminum 6061-T6
 Surface Finish: Chem. Film Per MIL-DTL-5541F
 Type I Class 3 (Yellow Iridite)
 RoHS Compliant Available
 Operating Temperature: -55°C to +75°C
 Storage Temperature: -60°C to +85°C
 Humidity: 95% Non-Condensing
 Size: 3.0 x 3.0 x 1.09"

Connector Configurations:

Model	Input (J1)	Output (J2)	Fwd (J3)	Rev (J4)
C9721-10	N Female	N Female	N Female	N Female
C9721-12	N Female	N Female	SMA	SMA
C9721-302	TNC Female	TNC Female	SMA	SMA
C9721-714	N Male	N Female	N Female	N Female
C9721-726	7/16 Male	N Female	N Female	N Female

Werlatone® Broadband Dual, Uni, and Bi Directional RF Couplers are designed to tolerate the most stringent operating conditions associated with military and EMC testing environments. Many of our RF Directional Couplers, designated Mismatch Tolerant®, will operate continuously, at rated power, into a severe load mismatch condition. Our multi-octave Directional Couplers maintain exceptional coupling flatness, directivity, VSWR, and insertion loss.


Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com



WERLATONE

Model C9721

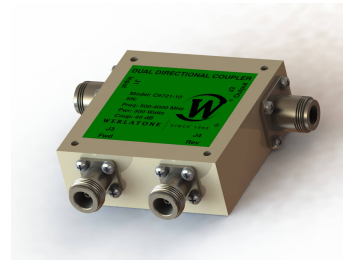


PRODUCT DATA SHEET


C9721

Performance Data (Specifications subject to change without notice):


Coupling:

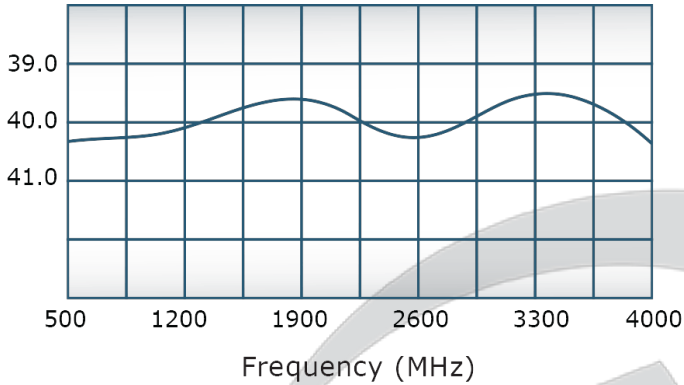


VSWR:

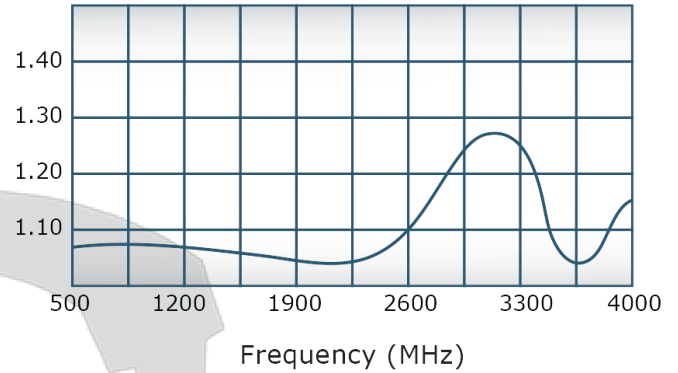

Insertion Loss:

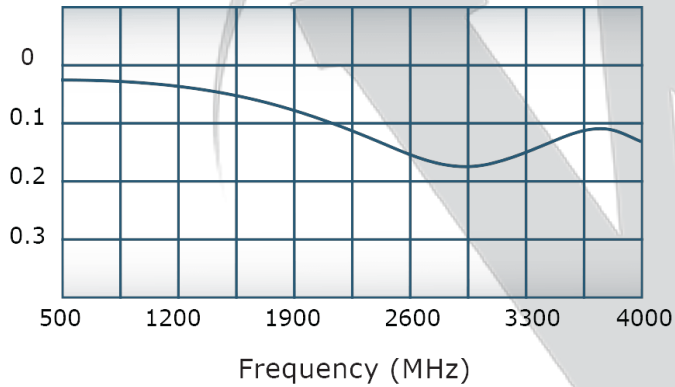


Directivity:

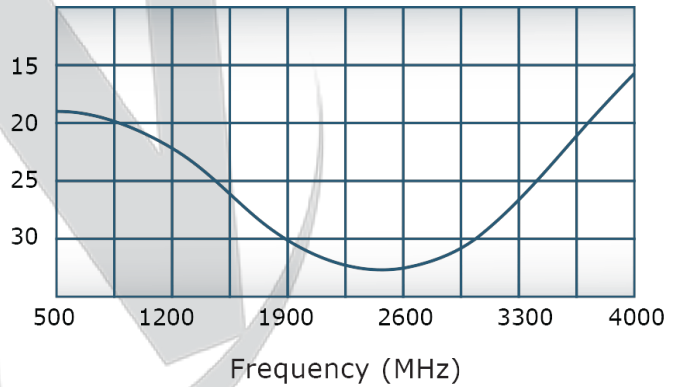

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION
This document contains proprietary information which is the sole property of Werlatone, Inc.

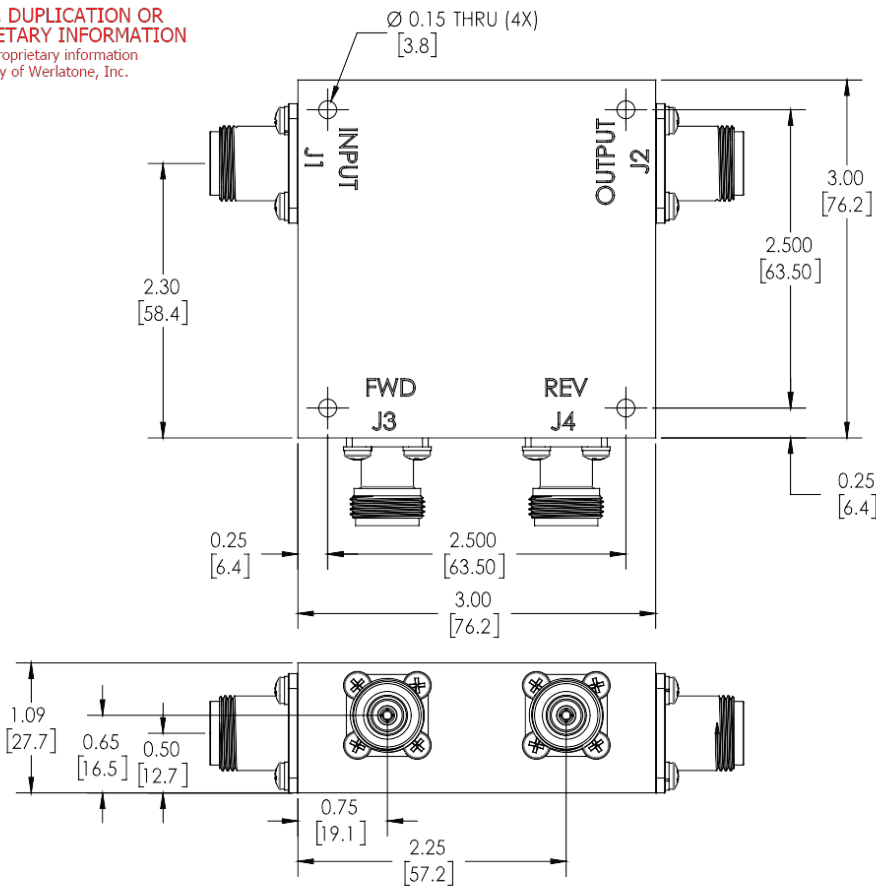


REVISION HISTORY			
REV.	REVISION RECORD	DATE	APPROVED
A	ECN 9696	11/27/18	RB

NOTES: UNLESS OTHERWISE SPECIFIED

- MATERIAL: ALUMINUM 6061-T6**
- FINISH: CHEM FILM PER MIL-DTL_5541F TYPE I CLASS 3 (YELLOW IRIDITE)**

UNLESS OTHERWISE SPECIFIED			
• INTERPRET DRAWING IN ACCORDANCE WITH MIL-STD-100	OWN	DATE	7/5/2001
• DIMENSIONS FOR ASME Y14.5M-2009	CHK	DATE	
• PARENTHESES FOR REF ONLY	ENGR	DATE	
• DIMENSIONS ARE IN INCHES	MJ	7/5/2001	
• DIMENSIONAL LIMITS APPLY BEFORE PROCESSING	MPGR	DATE	
• TOLERANCES:	QA	DATE	
ANGLES: ± 2°	RLSE	DATE	
2 PL. ± .005 [1.3]			
2 PL. ± .015 [3.8]			
• REMOVE ALL BURRS AND SHARP EDGES R.01 MAX			
• CONCENTRICITY MACHINED DIA: .002 FIM			
• MACHINE TOOL MISMATCH: .003 MAX			
NEXT ASSY	USED ON		
APPLICATION	THIRD ANGLE PROJECTION		

 WERLATONE SINCE 1965		17 Jon Barrett Rd Patterson, NY 12563
TITLE		
OUTLINE		
SIZE	CAGE CODE	DWG NO
B		10379-505
SCALE	REV	
1:1	A	
SHEET 1 OF 1		

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com