



DECADES AHEAD[®]
high power RF devices




Werlatone[®], Inc.

17 Jon Barrett Road Patterson, New York 12563
T (845) 278 2220 www.werlatone.com
F (845) 278 3440 sales@werlatone.com

4-Way Combiner/Divider

Model D10820

Frequency:	800 - 2000 MHz
Power:	1500 W CW
Insertion Loss:	0.4 dB Max.
VSWR:	1.35:1 Max.
Isolation:	11 dB Min.
Phase Balance:	± 5° Max.
Amplitude Balance:	± 0.25 dB Max.

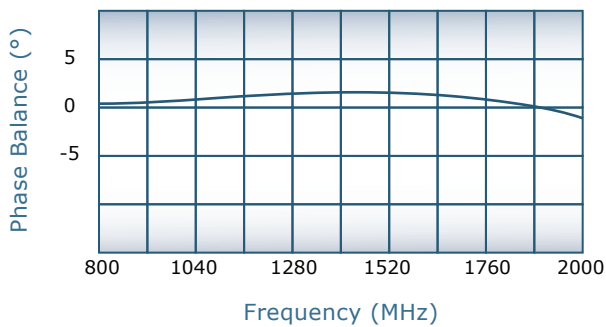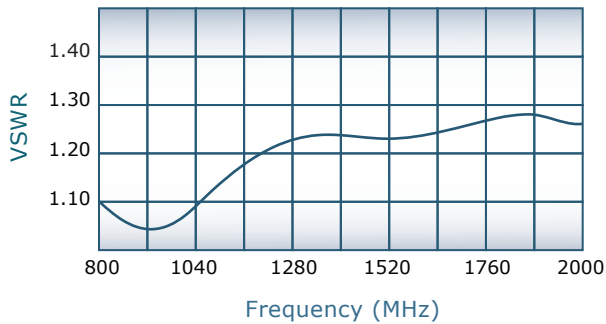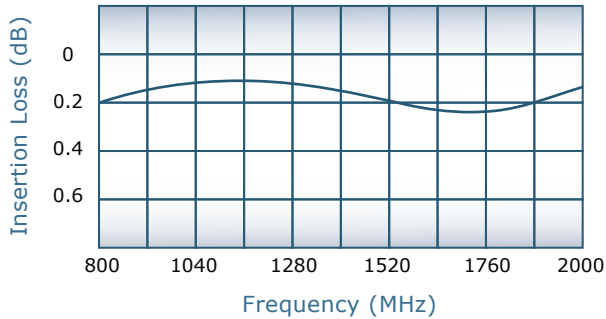


Notes

- All specifications guaranteed
- Test data provided with each unit shipped
- Alternate connector configurations upon request
- Weight: 3.5 pounds

Connector Configurations

Model	J5 (Sum Port)	J1-J4 (Input/Output)
D10820-20	7/16 Female	N Female

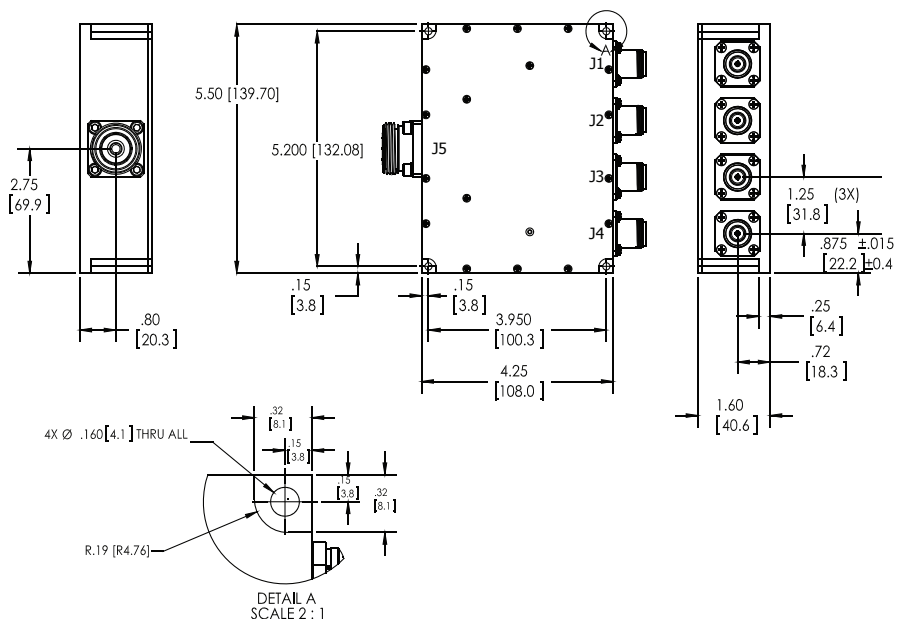

SINCE 1965

Specifications subject to change without notice



Send Us Your Specs for Custom Designs