



DECADES AHEAD[®]
high power RF devices

Werlatone[®], Inc.

17 Jon Barrett Road Patterson, New York 12563
T (845) 278 2220 www.werlatone.com
F (845) 278 3440 sales@werlatone.com

2-Way Combiner/Divider

Model D10830

Frequency: 80 - 1000 MHz

Power: 2000 W CW




Insertion Loss: 0.4 dB Max.

VSWR: 1.40:1 Max. (80-100 MHz)
1.30:1 Max. (100-1000 MHz)

Isolation: Non-Isolated

Phase Balance: $\pm 5^\circ$ Max.

Amplitude Balance: ± 0.25 dB Max.

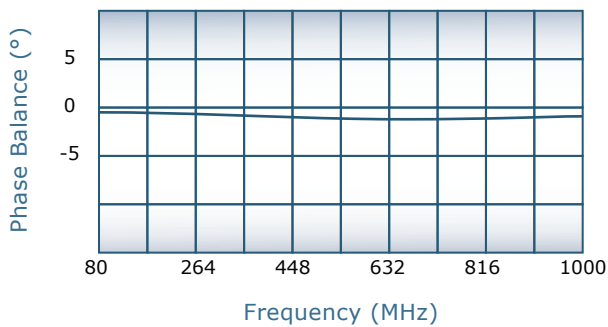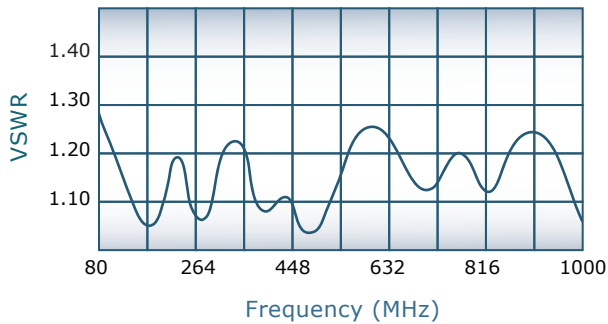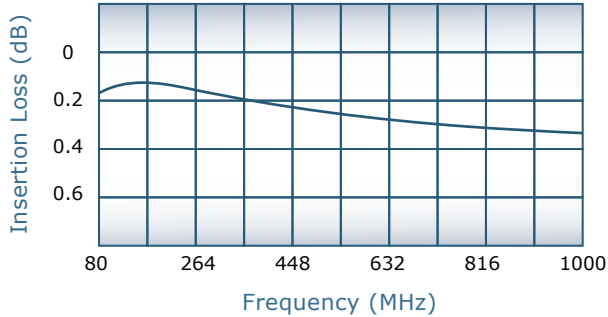

Notes

- All specifications guaranteed
- Test data provided with each unit shipped
- Alternate connector configurations upon request
- Weight: 3.5 pounds

Connector Configurations

Model	J1 (Sum Port)	J2,J3 (Input/Output)
D10830-296	7/16 Female	SC Female



SINCE 1965

