



**DECADES AHEAD<sup>®</sup>**  
**high power RF devices**





**Werlatone<sup>®</sup>, Inc.**

17 Jon Barrett Road Patterson, New York 12563  
 T (845) 278 2220      www.werlatone.com  
 F (845) 278 3440      sales@werlatone.com



**4-Way Combiner/Divider**  
**Model D10854**

Frequency:	200 - 1000 MHz
Power:	1200 W CW
Insertion Loss:	0.65 dB Max.
VSWR:	1.35:1 Max.
Isolation:	15 dB Min.
Phase Balance:	± 5° Max.
Amplitude Balance:	± 0.3 dB Max.

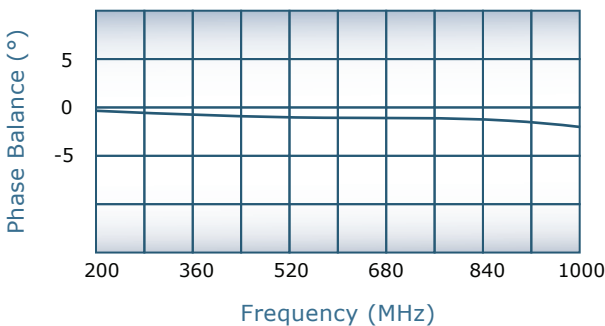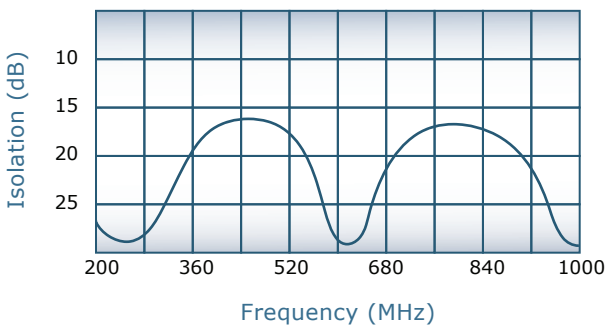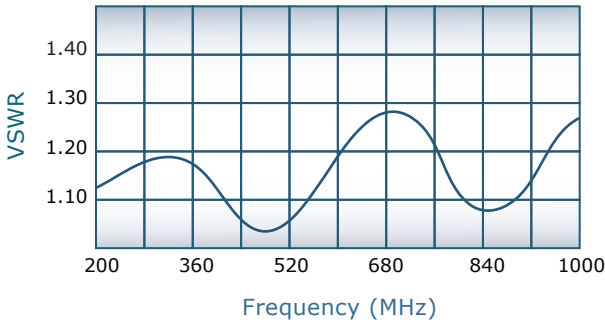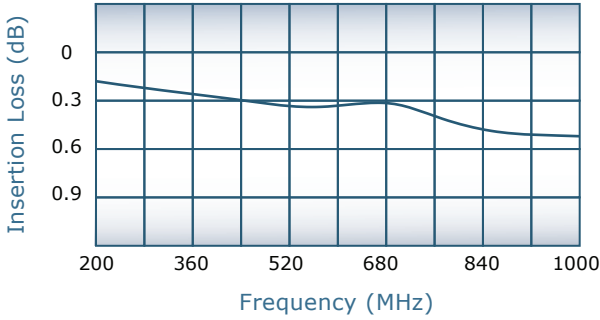


**Notes**

- All specifications guaranteed
- Test data provided with each unit shipped
- Alternate connector configurations upon request
- Weight: 4 pounds

**Connector Configurations**

Model	J1 (Sum Port)	J2-J5 (Input/Output)
D10854-20	7/16 Female	N Female
D10854-22	7/16 Female	SMA
D10854-41	SC Female	N Female

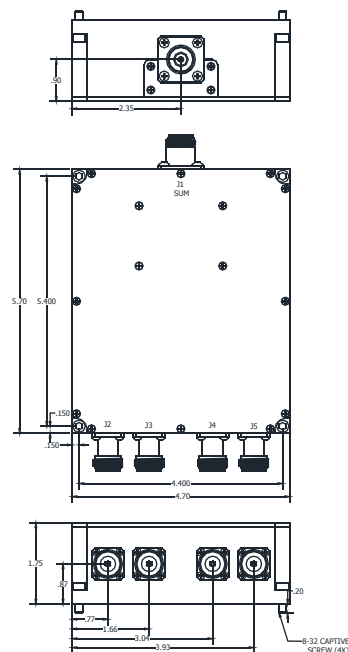

Specifications subject to change without notice



**Send Us Your Specs for Custom Designs**