



DECADES AHEAD[®]
high power RF devices

Werlatone[®], Inc.




17 Jon Barrett Road Patterson, New York 12563
T (845) 278 2220 www.werlatone.com
F (845) 278 3440 sales@werlatone.com



8-Way Radial Combiner/Divider

Model D9903

Frequency:	649 - 651 MHz
Power:	4000 W CW 16 kW Peak
Insertion Loss:	0.3 dB Max.
VSWR:	1.30:1 Max.
Phase Balance:	± 5° Max.
Amplitude Balance:	0.125 dB Max.

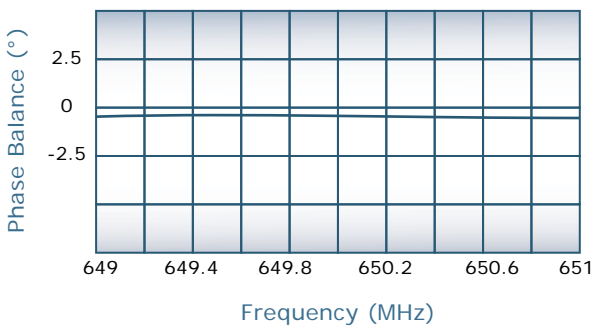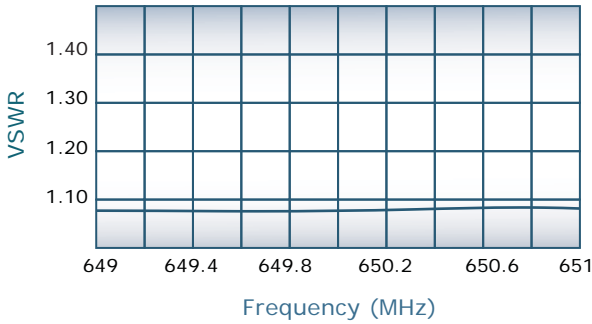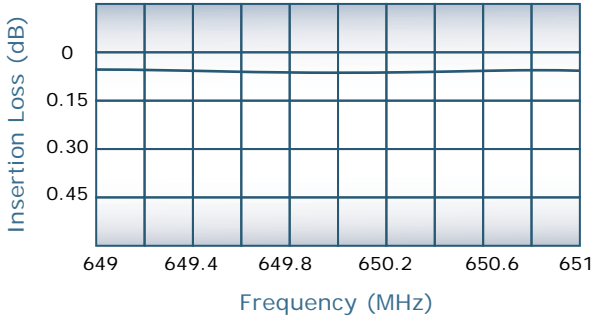


Notes

- All specifications guaranteed
- Test data provided with each unit shipped
- Weight: 6 pounds
- Alternate connector configurations upon request

Connector Configurations

Model	J9 (Sum Port)	J1-J8 (Input/Output)
D9903-80	1 5/8" EIA	N Female

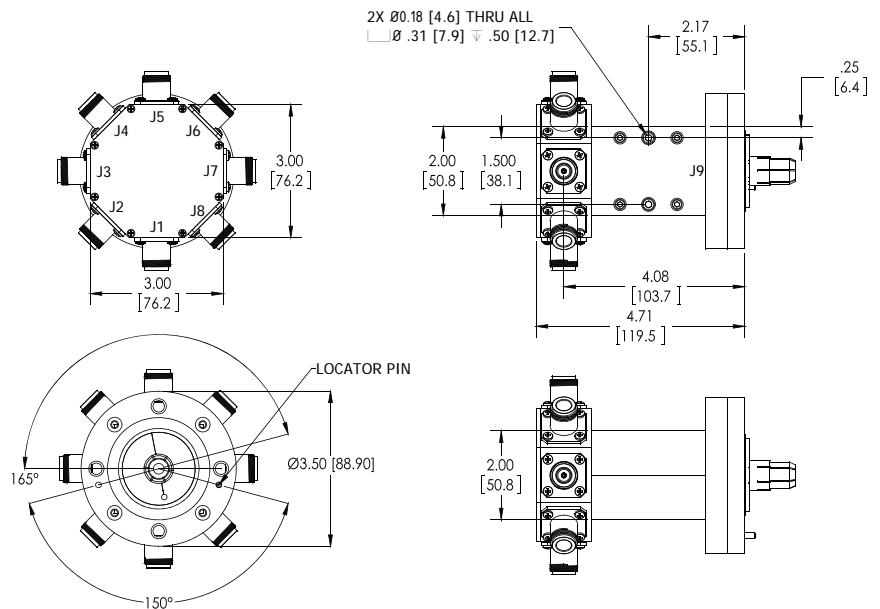

SINCE 1965

Specifications subject to change without notice



Send Us Your Specs for Custom Designs