



DECADES AHEAD[®]
high power RF devices

Werlatone[®], Inc.





17 Jon Barrett Road Patterson, New York 12563
 T (845) 278 2220 www.werlatone.com
 F (845) 278 3440 sales@werlatone.com



2-Way Combiner/Divider

Model D5674

Frequency:	0.01 - 250 MHz
Power:	100 W CW
Insertion Loss:	1.5 dB Max.
VSWR:	1.40:1 Max.
Isolation:	18 dB Min.
Phase Balance:	± 8° Max.
Amplitude Balance:	0.6 dB Max.

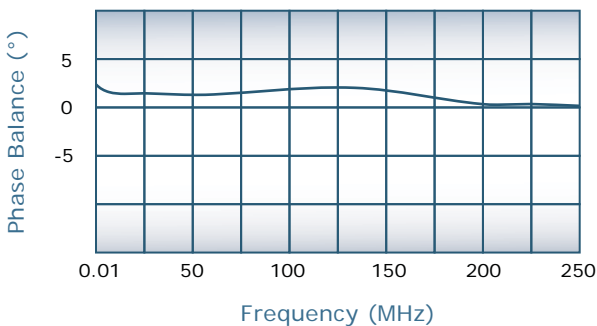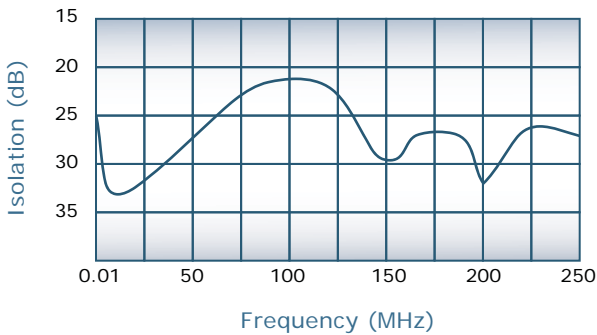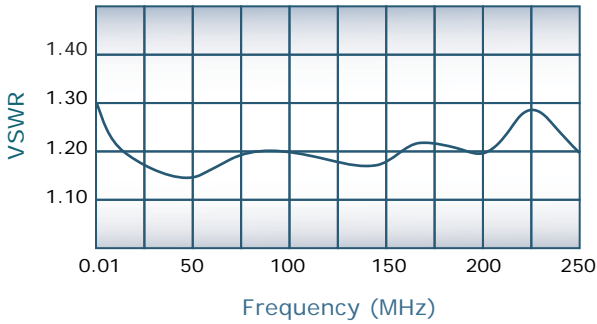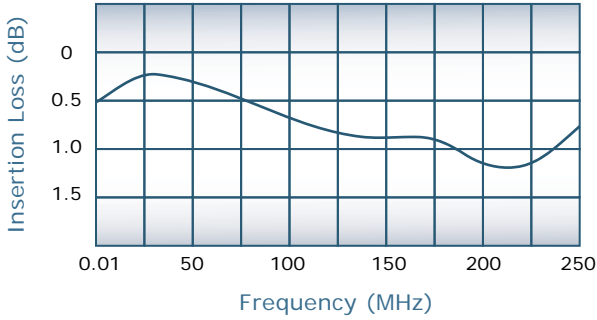


Notes

- All specifications guaranteed
- Test data provided with each unit shipped
- Alternate connector configurations upon request
- Weight: 5 Pounds 4 Ounces
- Operating Temperature: -55°C to +75°C

Connector Configurations

Model	J1 (Sum Port)	J2,J3 (Input/Output)
D5674-10	N Female	N Female
D5674-12	N Female	SMA
D5674-13	N Female	BNC
D5674-102	SMA	SMA

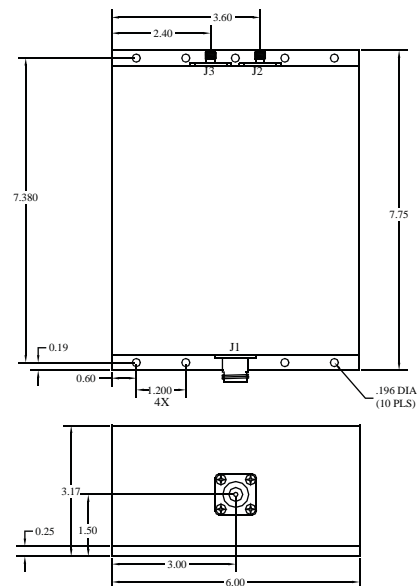

Specifications subject to change without notice



Send Us Your Specs for Custom Designs