



DECADES AHEAD[®]
high power RF devices

Werlatone[®], Inc.

17 Jon Barrett Road Patterson, New York 12563
T (845) 278 2220 www.werlatone.com
F (845) 278 3440 sales@werlatone.com



8-Way *Non-Magnetic* Combiner/Divider

Model D6861

Frequency: 290 - 300 MHz

Power: 200 W CW
4 kW Peak





Insertion Loss: 0.5 dB Max.

VSWR: 1.25:1 Max.

Isolation: 20 dB Min.

Phase Balance: $\pm 5^\circ$ Max.

Amplitude Balance: 0.3 dB Max.

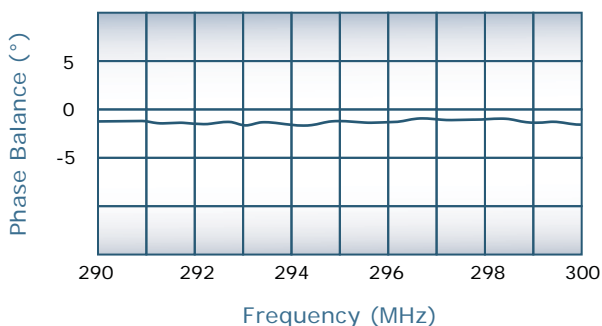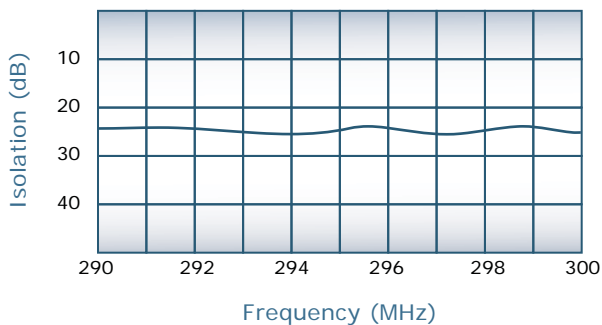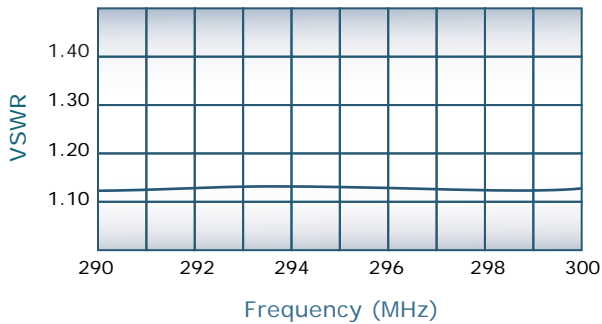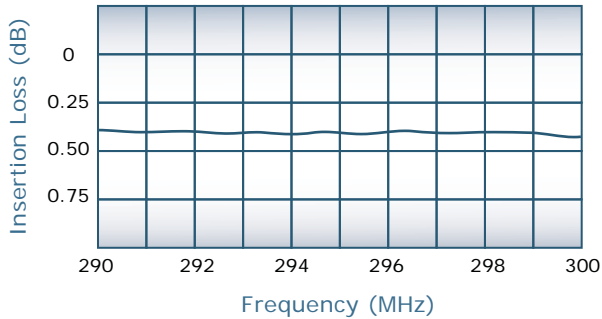

Notes

- All specifications guaranteed
- Test data provided with each unit shipped
- Alternate connector configurations upon request
- Weight: 3 Pounds 3 Ounces
- Operating Temperature: -55°C to +75°C
- Unit available with phase shifting



Electrical performance unaffected by magnetic field

Connector Configurations

Model	J9 (Sum Port)	J1-J8 (Input/Output)
D6861-10	N Female	N Female
D6861-12	N Female	SMA

