



DECADES AHEAD[®]
high power RF devices





Werlatone[®], Inc.

17 Jon Barrett Road Patterson, New York 12563
T (845) 278 2220 www.werlatone.com
F (845) 278 3440 sales@werlatone.com



2-Way Combiner/Divider
Model D9589

Frequency:	2 - 32 MHz
Power:	1,000 W CW
Insertion Loss:	0.1 dB Max.
VSWR:	1.30:1 Max.
Isolation:	20 dB Min.
Phase Balance:	± 5° Max.
Amplitude Balance:	0.1 dB Max.

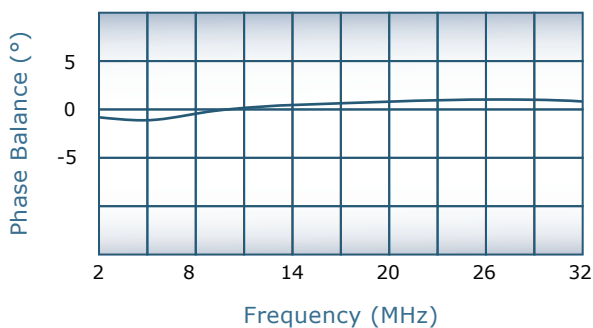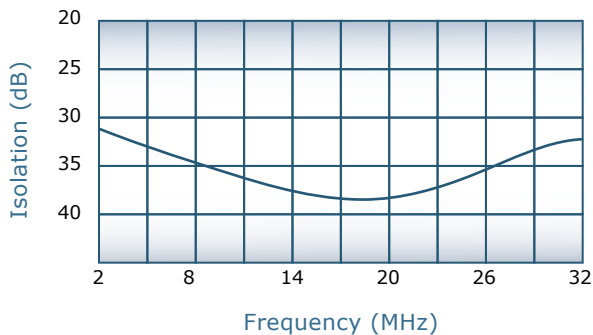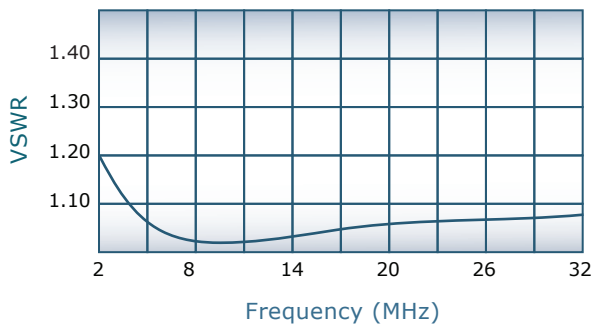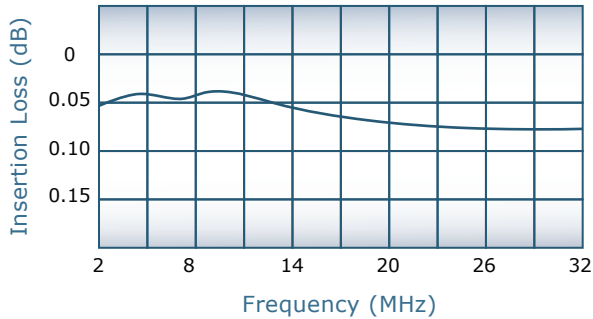

Notes

- All specifications guaranteed
- Test data provided with each unit shipped
- Alternate connector configurations upon request
- Weight: 1 Pound 4 Ounces
- Operating Temperature: -55°C to +75°C
- Unit must be mounted to a suitable heatsink capable of maintaining a unit baseplate temperature of ≤ +60°C

Connector Configurations

Model	J1 (Sum Port)	J2,J3 (Input/Output)
D9589-10	N Female	N Female
D9589-12	N Female	SMA
D9589-13	N Female	BNC
D9589-102	SMA	SMA

