



DECADES AHEAD[®]
high power RF devices

Werlatone[®], Inc.

17 Jon Barrett Road Patterson, New York 12563
T (845) 278 2220 www.werlatone.com
F (845) 278 3440 sales@werlatone.com



2-Way Combiner/Divider

Model D9667

Frequency: 2000 - 6000 MHz

Power: 500 W CW





Insertion Loss: 0.5 dB Max.

VSWR: 1.50:1 Max.

Isolation: 15 dB Min.

Phase Balance: $\pm 5^\circ$ Max.

Amplitude Balance: 0.25 dB Max.

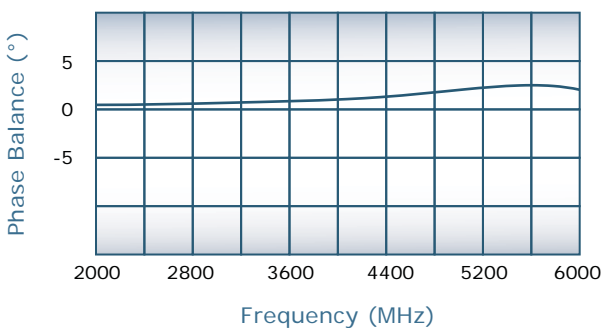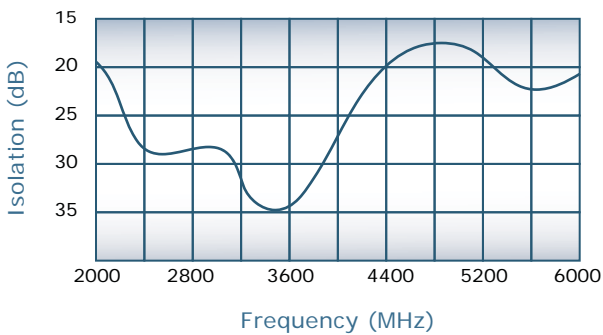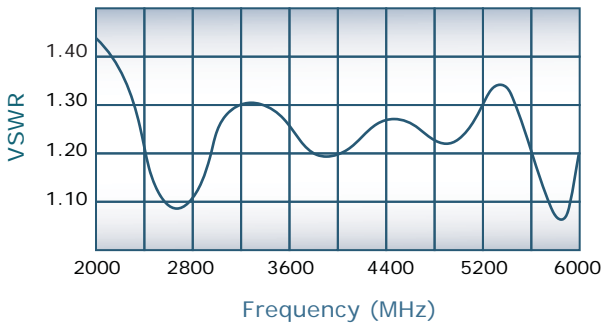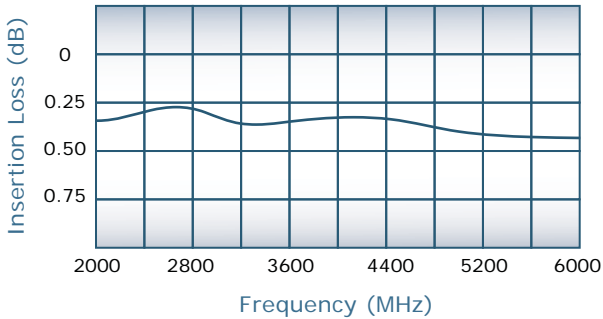

Notes

- All specifications guaranteed
- Test data provided with each unit shipped
- Alternate connector configurations upon request
- Operating Temperature: -55°C to +75°C

[View Audiovisual Presentation](#)

Connector Configurations

Model	J1 (Sum Port)	J2, J3 (Input/Output)
D9667-10	N Female	N Female
D9667-12	N Female	SMA
D9667-102	SMA	SMA

