Model QH8911
90° Hybrids Connectorized

PRODUCT DATA SHEET **QH8911**

Our patented 3 dB 90° Hybrid Couplers provide:

- Superior component performance starting at 3:1 Bandwidth.
- Thicker center boards for high power and increased repeatability.
- Bonded structures which eliminate any air gaps between substrates.
- More sections per bandwidth for better coupling flatness.
- Electrically shorter and physically smaller RF components.

Features:

High Power Wide Bandwidths Small Size Connectorized Drop-In & Surface Mount

Electrical Specifications:

Frequency:	80 - 1000 MHz
Power:	250 W CW
Insertion Loss:	0.7 dB Max.
VSWR:	1.45:1 Max.
Phase Balance:	90° ± 5° Max.
Amplitude Balance:	± 1.0 dB Max.
Isolation:	18 dB Min.

Mechanical Specifications:

Type:	Connectorized
Material:	Aluminum 6061-T6
Surface Finish:	Chem. Film Per MIL-DTL-5541F Type I Class 3 (Yellow Iridite) RoHS Compliant Available
Operating Temperature:	-55°C to +75°C
Storage Temperature:	-60°C to +85°C
Weight:	0.75 lbs.
Size:	4.25 x 2.88 x 1.0''

Connector Configurations:

Model	**Sum Port (J1)**	**0°, -90° (J2,J3)**	**Ext. Load Port**
QH8911-10	N Female	N Female	Not Applicable
QH8911-12	N Female	SMA	Not Applicable
QH8911-102	SMA	SMA	Not Applicable


Werlatone's breakthrough technology allows us to build our existing line of Broadband 3 dB High Power 90° Hybrid Couplers. Connectorized 3 dB 90° Hybrid Coupler models are available with a choice of connectors. Several of our existing High Power 3 dB 90° RF Couplers are three port designs, wherein the difference port is internally terminated with a high power termination. This eliminates the need for a customer supplied external load for each Hybrid Coupler.

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com


Werlatone, Inc.All Rights Reserved

Performance Data (Specifications subject to change without notice):


Coupling:

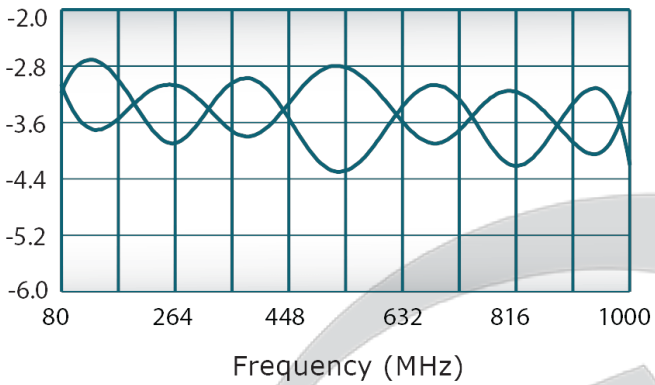


VSWR:

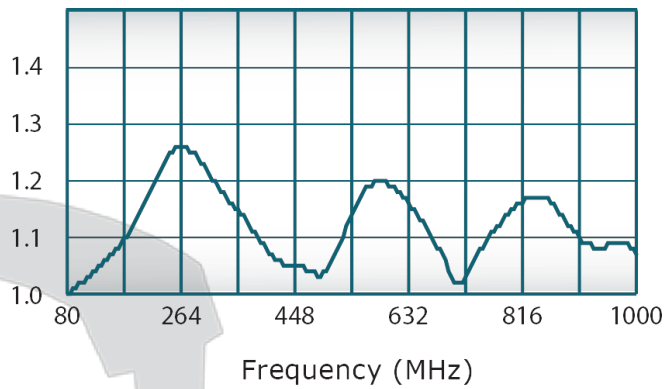

Isolation:

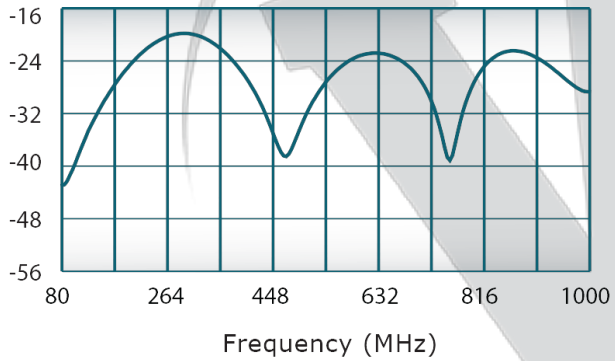

Phase Balance:

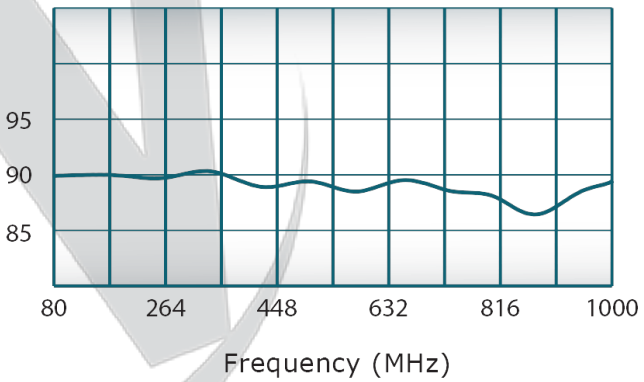


Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

Werlatone, Inc.All Rights Reserved

RESTRICTION ON USE, DUPLICATION OR DISCLOUSRE OF PROPRIETARY INFORMATION
This document contains proprietary information which is the sole property of Werlatone, Inc.

REVISION HISTORY					
DATE	REV	REVISION RECORD	AUTH	CHK	APPV
4/7/2011	-	INITIAL RELEASE	NH	BW	BW

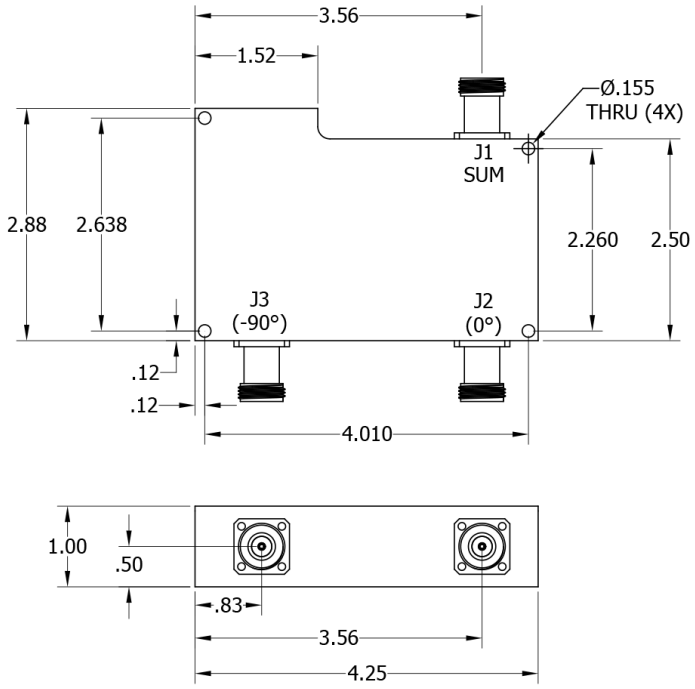

UNLESS OTHERWISE SPECIFIED · INTERPRET DRAWING IAW MIL-STD-100 · DIMENSIONING PER ASME Y14.5M-2009 · PARANTHETICAL INFO FOR REF ONLY · DIMENSIONS ARE IN INCHES · TOLERANCES: ANGLE ± 2° 3 PL DECIMALS ± .005 2 PL DECIMALS ± .015 THIRD ANGLE PROJECTION	DWN NH	DATE 04/07/11	WERLATONE | SINCE 1965 17 Jon Barrett Rd Patterson, NY 12563
	CHK BW	DATE 04/07/11	TITLE: OUTLINE
	ENGR BW	DATE 04/07/11	USED ON
	QA	DATE	
	RLSE	DATE	SIZE A | CAGE CODE 28812 | DWG NO 20737-500 | REV -
			SCALE 1:2 | SHEET 1 OF 1

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com