



PRODUCT DATA SHEET

QH9103

Our patented 3 dB 90° Hybrid Couplers provide:

- Superior component performance starting at 3:1 Bandwidth.
- Thicker center boards for high power and increased repeatability.
- Bonded structures which eliminate any air gaps between substrates.
- More sections per bandwidth for better coupling flatness.
- Electrically shorter and physically smaller RF components.

Features:

High Power Wide Bandwidths Small Size Connectorized Drop-In & Surface Mount

Electrical Specifications:

Frequency: 80 - 1000 MHz
 Power: 100 W CW
 Insertion Loss: 1.0 dB Max.
 VSWR: 1.40:1 Max.
 Phase Balance: 90° ± 5° Max.
 Amplitude Balance: ± 1.0 dB Max.
 Isolation: 16 dB Min.

Mechanical Specifications:

Type: Connectorized
 Material: Aluminum 6061-T6
 Surface Finish: Chem. Film Per MIL-DTL-5541F Type II Class 3 (Clear Iridite) RoHS Compliant Available
 Operating Temperature: -55°C to +75°C
 Storage Temperature: -60°C to +85°C
 Weight: 5.65 oz.
 Size: 3.1 x 1.7 x 0.84"

Connector Configurations:

Model	Sum Port (J1)	0°, +90° (J2,J3)	ISO Port (J4)
QH9103-102	SMA	SMA	SMA

"QH9103R-102" indicates a RoHS Compliant design.

Werlatone's breakthrough technology allows us to build our existing line of Broadband 3 dB High Power 90° Hybrid Couplers. Connectorized 3 dB 90° Hybrid Coupler models are available with a choice of connectors. Several of our existing High Power 3 dB 90° RF Couplers are three port designs, wherein the difference port is internally terminated with a high power termination. This eliminates the need for a customer supplied external load for each Hybrid Coupler.


Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com




Performance Data (Specifications subject to change without notice):


Coupling:

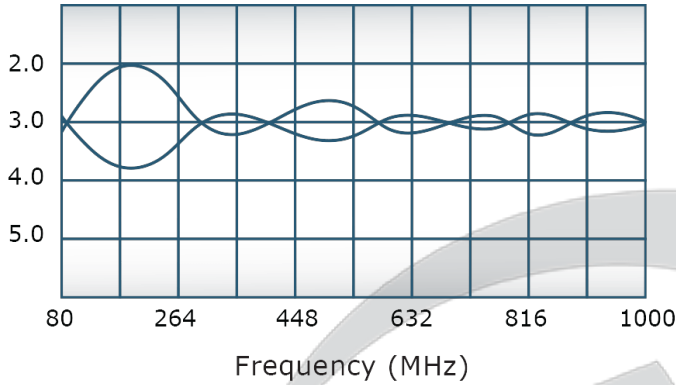


VSWR:

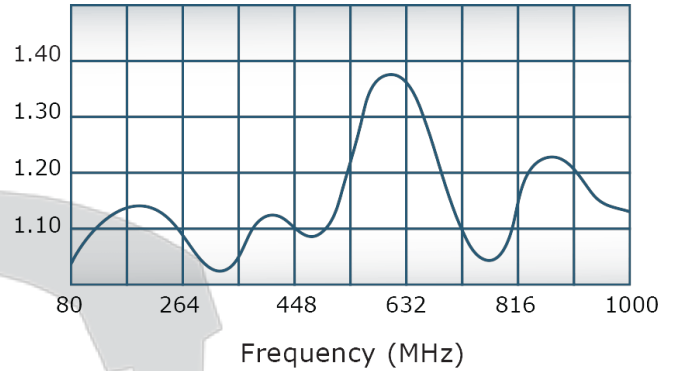

Isolation:

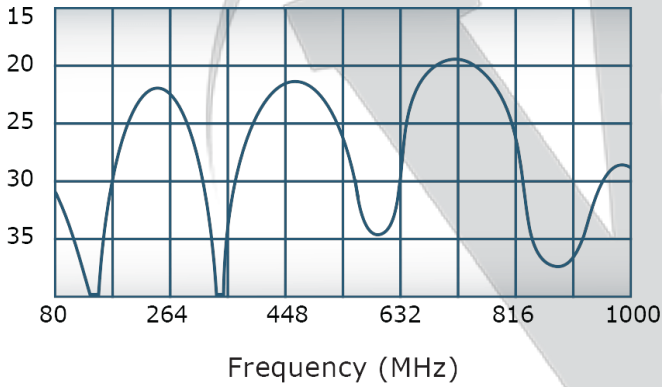

Phase Balance:

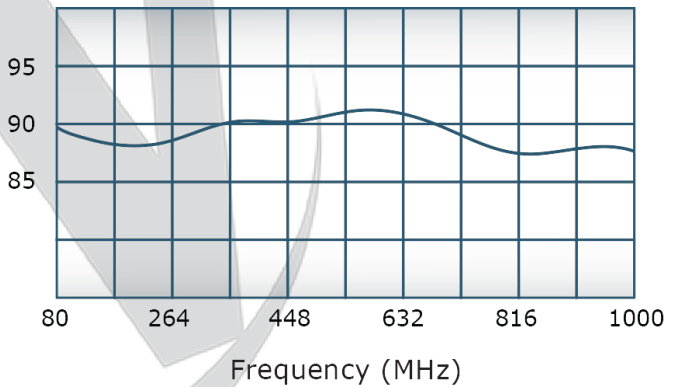


Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of

Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION
 This document contains proprietary information which is the sole property of Werlatone, Inc.

REVISION HISTORY			
REV	REVISION RECORD	DATE	APPROVED
-	INITIAL RLS	8/23/2011	BW
A	ECN 10037	5/11/2021	BW

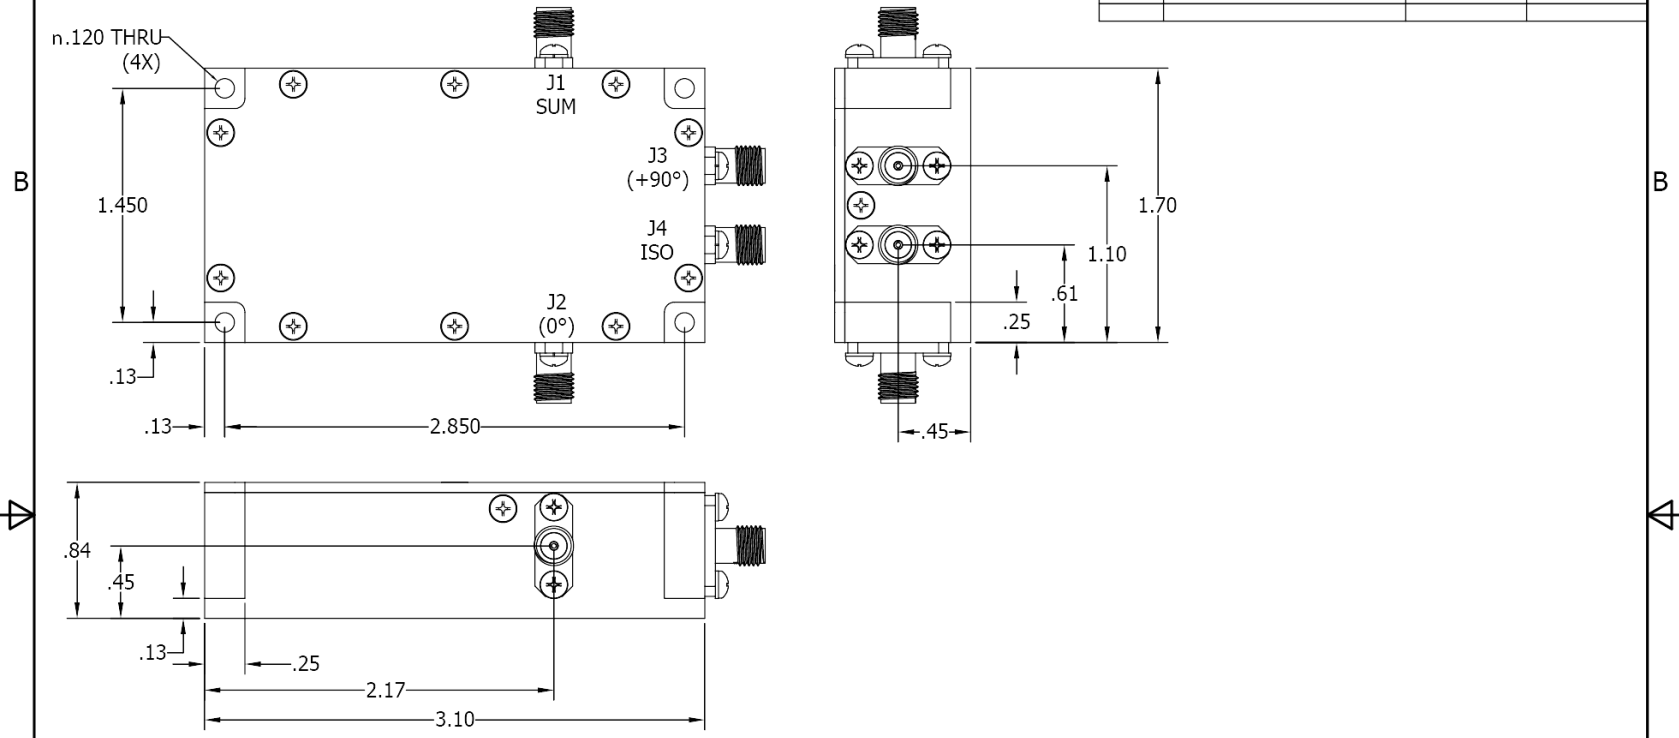

NOTES:

- MAT'L: ALUMINUM 6061-T6
- FINISH: CHEM FILM PER MIL-DTL-5541F TYPE 1 CLASS 3 (YELLOW IRIDITE)
- CONNECTORS: ALL SMA (Female)

UNLESS OTHERWISE SPECIFIED		DWN	DATE	WERLATONE SINCE 1965 17 Jon Barrett Rd Patterson, NY 12563
• INTERPRET DRAWING LAW MIL-STD-100 • DIMENSIONING PER ASME Y14.5M-2009 • PARENTHETICAL INFO FOR REF ONLY • DIMENSIONS ARE IN INCHES • DIMENSIONAL LIMITS APPLY BEFORE PROCESSES • TOLERANCES: ANGLES ± 2° XXX = .005 XX = .015 • HOLE TOLERANCES +.004/-.001 • REMOVE ALL BURRS AND SHARP EDGES R.01 MAX • CONCENTRICITY MACHINED DIA: .002 FIM • MACHINE TOOL MISMATCH: .003 MAX		NH	8/23/2011	
NEXT ASSY USED ON APPLICATION		CHK	DATE	TITLE
		BW	8/23/2011	OUTLINE
		ENGR	DATE	SIZE CAGE CODE DWG NO
		BW	8/23/2011	A 28812 20796-500
		MFGR	DATE	REV
		QA	DATE	A
		RLSE	DATE	SCALE
				SHEET 1 OF 1

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
 Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com