Model QH11643
90° Hybrids Surface Mount (SMT) & Drop

PRODUCT DATA SHEET **QH11643**

Our patented 3 dB 90° Hybrid Couplers provide:

- Superior component performance starting at 3:1 Bandwidth.
- Thicker center boards for high power and increased repeatability.
- Bonded structures which eliminate any air gaps between substrates.
- More sections per bandwidth for better coupling flatness.
- Electrically shorter and physically smaller RF components.

Features:

High Power Wide Bandwidths Small Size Connectorized Drop-In & Surface Mount

Electrical Specifications:

Frequency:	200 - 1000 MHz
Power:	200 W CW
Insertion Loss	0.4 dB Max.
VSWR:	1.30:1 Max.
Phase Balance:	90° ± 5° dB Max.
Amplitude Balance:	± 0.7 dB Max.
Isolation:	18 dB Min.

Mechanical Specifications:

Type:	Surface Mount
Plating Options:	QH11643-Pb: Electrodeposited Tin/Lead QH11643-Sn: Immersion Tin (RoHS Compliant) QH11643-Ag: Immersion Silver (RoHS Compliant)
Size:	2.8 x 0.75 x 0.16''

Port Configurations:

J1	**J2**	**J3**	**J4**
Input	3 dB, 0°	3 dB, -90°	Isolated
3 dB, 0°	Input	Isolated	3 dB, -90°
3 dB, -90°	Isolated	Input	3 dB, 0°
Isolated	3 dB, 90°	3 dB, 0°	Input


Werlatone's breakthrough technology allows us to build our existing line of Broadband 3 dB High Power 90° Hybrid Couplers. Connectorized 3 dB 90° Hybrid Coupler models are available with a choice of connectors. Several of our existing High Power 3 dB 90° RF Couplers are three port designs, wherein the difference port is internally terminated with a high power termination. This eliminates the need for a customer supplied external load for each Hybrid Coupler.

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com


Werlatone, Inc.All Rights Reserved

Performance Data (Specifications subject to change without notice):


Coupling:

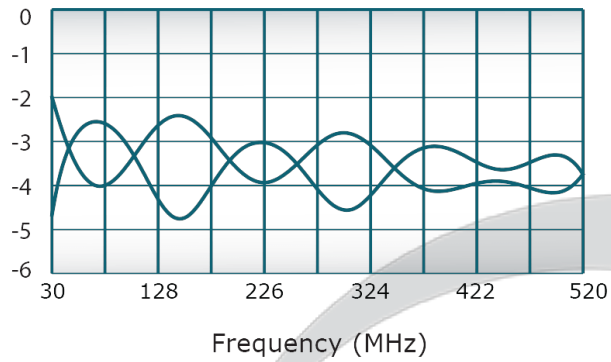


VSWR:

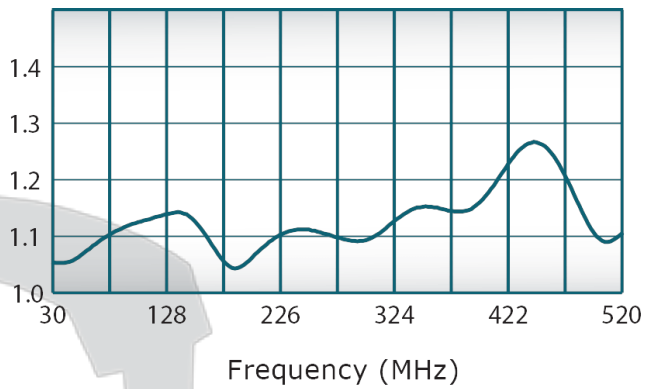

Isolation:

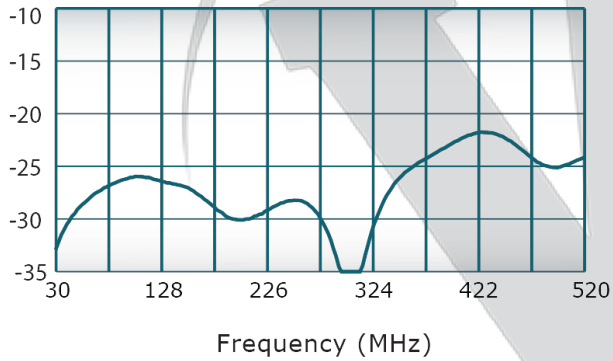


Phase Balance:

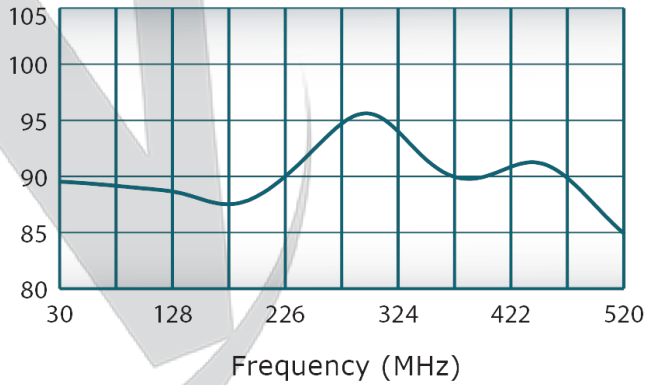


Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

RESTRICTION ON USE, DUPLICATION OR DISCLOUSRE OF PROPRIETARY INFORMATION
This document contains proprietary information which is the sole property of Werlatone, Inc.

REVISION HISTORY			
REV.	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	3/9/2018	BW
A	ECN 9543	3/30/2018	BW

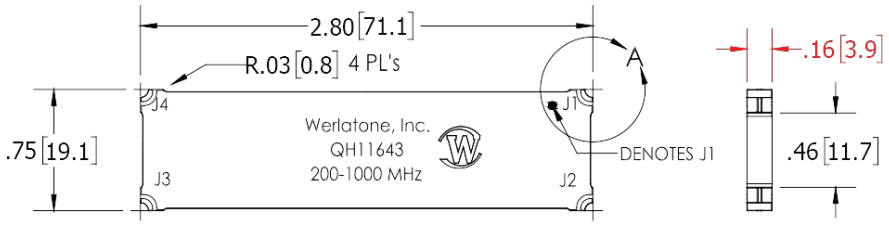

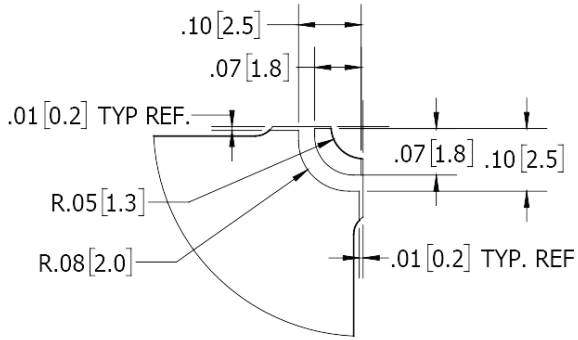

DETAIL A
SCALE 4 : 1

FINISH	
P/N	TYPE
QH11643-Ag	RoHS Imm. Silver
QH11643-Au	RoHS Nickel Gold
QH11643-Pb	ED Tin/Lead
QH11643-Sn	RoHS Imm. Tin

NOTES: UNLESS OTHERWISE SPECIFIED

1. SEE SMT APPLICATION NOTE FOR FURTHER INFORMATION

PORT CONFIGURATIONS			
J1	J2	J3	J4
Input	3 dB, 0°	3 dB, -90°	Isolated
3 dB, 0°	Input	Isolated	3 dB, -90°
3 dB, -90°	Isolated	Input	3 dB, 0°
Isolated	3 dB, -90°	3 dB, 0°	Input

	QH11643
NEXT ASSY	USED ON
APPLICATION	

UNLESS OTHERWISE SPECIFIED
- INTERPRET DRAWING IAW MIL-STD-100
- DIMENSIONING PER ASME Y14.5M-2009
- PARENTHETICAL INFO FOR REF ONLY
- DIMENSIONS ARE IN INCHES
- DIMENSIONAL LIMITS APPLY BEFORE PROCESSES
- TOLERANCES:
  ANGLES ± 2°
  3 PL ± .005
  2 PL ± .015
- REMOVE BURRS AND SHARP EDGES R.01 MAX
- CONCENTRICITY MACHINED DIA: .002 FIM
- MACHINE TOOL MISMATCH .003 MAX

THIRD ANGLE PROJECTION

DWN	GP	DATE 3/9/2018
CHK	PR	DATE 3/9/2018
ENGR	GP	DATE 3/9/2018
MFGR		DATE
QA		DATE
RLSE		DATE

WERLATONE SINCE 1965
17 Jon Barrett Rd
Patterson, NY 12563

TITLE
OUTLINE, QH11643 90° HYBRID COUPLER, 200-1000 MHz, 200 W

SIZE	CAGE CODE	DWG NO	REV
A	28812	21596-500	A

SCALE 1:1 SHEET 1 OF 1

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com