
WERLATONE

Model QH10828
90° Hybrids Surface Mount (SMT) & Drop



PRODUCT DATA SHEET **QH10828**

Our patented 3 dB 90° Hybrid Couplers provide:

- Superior component performance starting at 3:1 Bandwidth.
- Thicker center boards for high power and increased repeatability.
- Bonded structures which eliminate any air gaps between substrates.
- More sections per bandwidth for better coupling flatness.
- Electrically shorter and physically smaller RF components.

Features:

High Power Wide Bandwidths Small Size Connectorized Drop-In & Surface Mount

Electrical Specifications:

Frequency:	1000 - 8000 MHz
Power:	100 W CW
Insertion Loss	0.9 dB Max.
VSWR:	1.40:1 Max.
Phase Balance:	± 5° dB Max.
Amplitude Balance:	± 0.7 dB Max. (1200-8000 MHz) ± 1.5 dB Max. (1000-1200 MHz)
Isolation:	17 dB Min.

Mechanical Specifications:

Type:	Surface Mount
Plating Options:	QH10828-Pb: Electrodeposited Tin/Lead QH10828-Sn: Immersion Tin (RoHS Compliant) QH10828-Ag: Immersion Silver (RoHS Compliant)
Size:	0.65 x 0.5 x 0.07''

Port Configurations:


J1	J2	J3	J4
Input	3 dB, 0°	-3 dB, -90°	Isolated
-3 dB, 0°	Input	Isolated	-3 dB, -90°
-3 dB, -90°	Isolated	Input	-3 dB, 0°
Isolated	-3 dB, -90°	-3 dB, 0°	Input

Werlatone's breakthrough technology allows us to build our existing line of Broadband 3 dB High Power 90° Hybrid Couplers. Connectorized 3 dB 90° Hybrid Coupler models are available with a choice of connectors. Several of our existing High Power 3 dB 90° RF Couplers are three port designs, wherein the difference port is internally terminated with a high power termination. This eliminates the need for a customer supplied external load for each Hybrid Coupler.

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

Werlatone, Inc.All Rights Reserved


Model QH10828
90° Hybrids Surface Mount (SMT) & Drop



PRODUCT DATA SHEET **QH10828**

Performance Data (Specifications subject to change without notice):

Plot 1: Coupling & Insertion Loss, Plot 2: Phase Balance, Plot 3: Isolation, Plot 4: VSWR

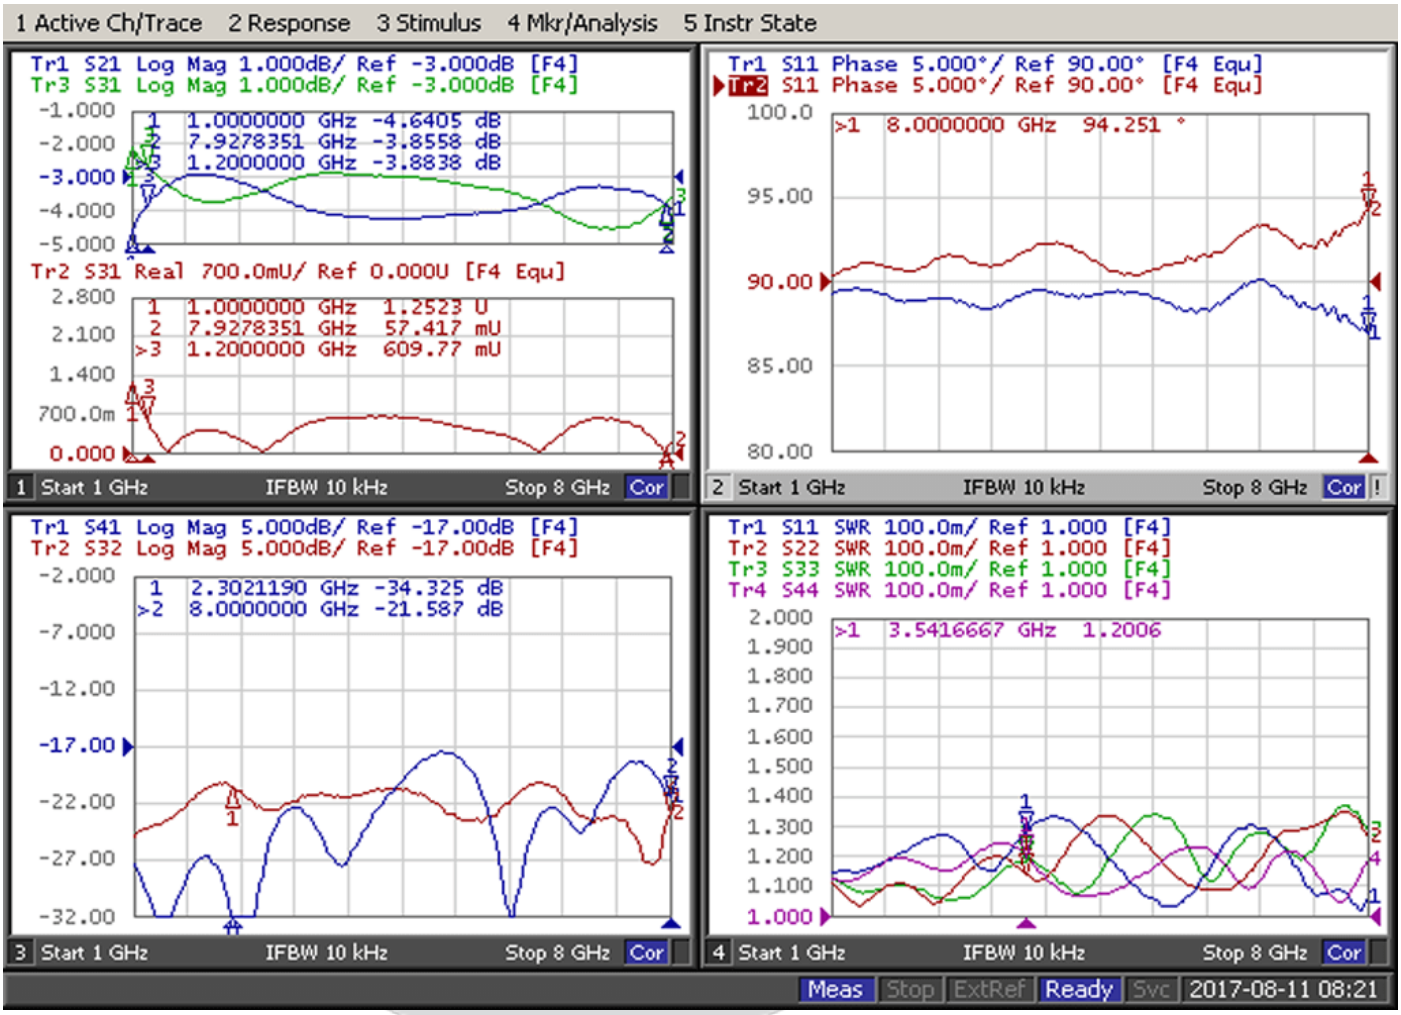



Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

Werlatone, Inc.All Rights Reserved

RESTRICTION ON USE, DUPLICATION OR
DISCLOSURE OF PROPRIETARY INFORMATION
This document contains proprietary information
which is the sole property of Werlatone, Inc.

REVISION HISTORY			
REV.	REVISION RECORD	DATE	APPROVED
-	PRE-RELEASE	2/1/2017	CS
A	ECN9328	6/1/2017	CS
B	ECN10098	9/16/21	CS

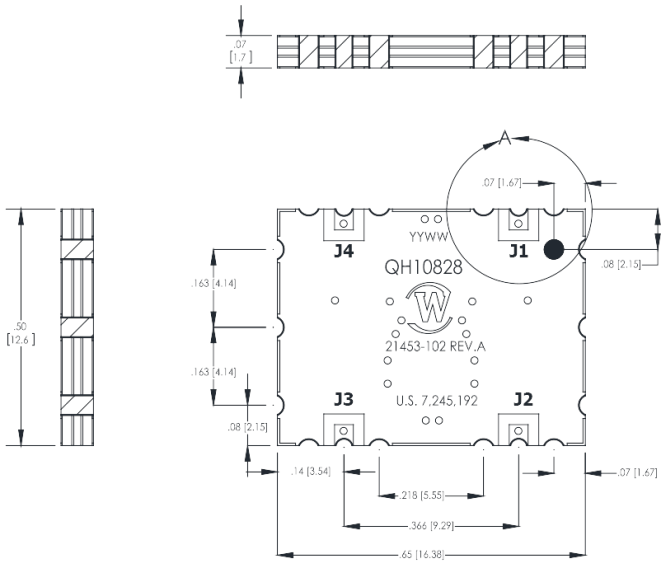

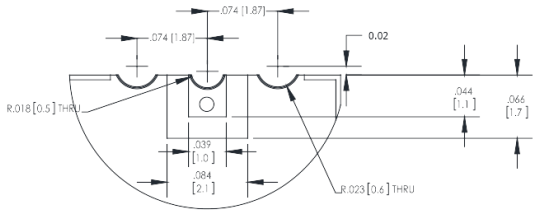

DETAIL A
SCALE 8 : 1



Port Configurations			
J1	J2	J3	J4
Input	-3 dB, 0°	-3 dB, -90°	Isolated
-3 dB, 0°	Input	Isolated	-3 dB, -90°
-3 dB, -90°	Isolated	Input	-3 dB, 0°
Isolated	-3 dB, -90°	-3 dB, 0°	Input

ELECTRICAL SPECIFICATIONS

Frequency:	1000 - 8000 MHz
Power:	60 Watts CW
Insertion Loss:	0.9 dB Max.
Amplitude Balance:	±0.7 dB Max. 1200-8000 MHz
	±1.5 dB Max. 1000 - 1200 MHz
Phase Balance:	± 5° Max.
VSWR:	1.4 :1
Isolation:	17 dB Min.

NOTES: UNLESS OTHERWISE SPECIFIED

1. **SURFACE MOUNT UNIT**
2. **SURFACE FINISH: IMMERSION SILVER (RoHS Compliant). OTHER SURFACE FINISHES AVAILABLE UPON REQUEST.**
3. **SEE SURFACE MOUNT TECH NOTE FOR INSTALLATION GUIDELINES.**

	QH10828
NEXT ASSY	USED ON
APPLICATION	

UNLESS OTHERWISE SPECIFIED
- INTERPRET DRAWING IAW MIL-STD-100
- DIMENSIONING PER ASME Y14.5M-2009
- PARENTHETICAL INFO FOR REF ONLY
- DIMENSIONS ARE IN INCHES [mm]
- DIMENSIONAL LIMITS APPLY BEFORE PROCESSES
- TOLERANCES:
  ANGLES ± 2°
  3 PL ± .005 [.13]
  2 PL ± .015 [.4]

THIRD ANGLE PROJECTION

		DATE
DWN	MB	2/1/2017
CHK		DATE
	BW	2/1/2017
ENGR		DATE
	MB	2/1/2017
MFGR		DATE
QA		DATE
RLSE		DATE

WERLATONE SINCE 1965
17 Jon Barrett Rd
Patterson, NY 12563

TITLE
OUTLINE

SIZE	CAGE CODE	DWG NO	REV
B	28812	21453-500	B

SCALE 4:1 SHEET 1 OF 1

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com