
PRODUCT DATA SHEET
C10762

4-Port Dual Directional Coupler employs two, 3-Port Uni-Directional Couplers, internally connected, in tandem, providing measurement of both forward and reverse power. Ideal for simultaneously monitoring a system's forward and reverse power and for reflectometer measurements. Unlike the Bi-Directional Coupler, the directivity of the Dual Directional Coupler is unaffected by the loads on the coupled ports.

Features:

High Power Wide Bandwidths Small Size Flat Coupling Custom Designs Available

Electrical Specifications:

Frequency: 1000 - 6000 MHz
 Power: 300 W CW
 Coupling: 40 ± 1.0 dB Max.
 Insertion Loss: 0.2 dB Max.
 Flatness: ± 0.5 dB Max.
 VSWR (ML): 1.30:1 Max. (1.35:1 Max. with 7/16 ML connectors)
 Directivity: 15 dB Min.


Mechanical Specifications:

Type: Connectorized
 Material: Aluminum 6061-T6
 Surface Finish: Chem. Film Per MIL-DTL-5541F
 Type II Class 3 (Clear Iridite)
 RoHS Compliant Available
 Operating Temperature: -55°C to +75°C
 Storage Temperature: -60°C to +85°C
 Humidity: 95% Non-Condensing
 Size: 2.0 x 2.0 x 1.06"

Connector Configurations:

Model	Input (J1)	Output (J2)	Fwd (J3)	Rev (J4)
C10762-10	N Female	N Female	N Female	N Female
C10762-12	N Female	N Female	SMA	SMA
C10762-14	N Male	N Male	N Female	N Female
C10762-20*	7/16 Female	7/16 Female	7/16 Female	7/16 Female
C10762-22*	7/16 Female	7/16 Female	SMA	SMA
C10762-612	N Female	N Male	SMA	SMA
C10762-714	N Male	N Female	N Female	N Female
C10762-727*	7/16 Male	7/16 Female	N Female	N Female

*Starred options are 3.0 x 3.0 x 1.36"

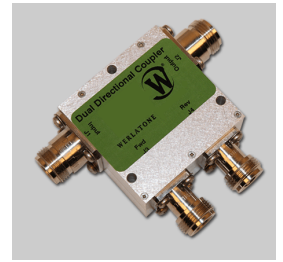


PRODUCT DATA SHEET


C10762

Performance Data (Specifications subject to change without notice):


Coupling:

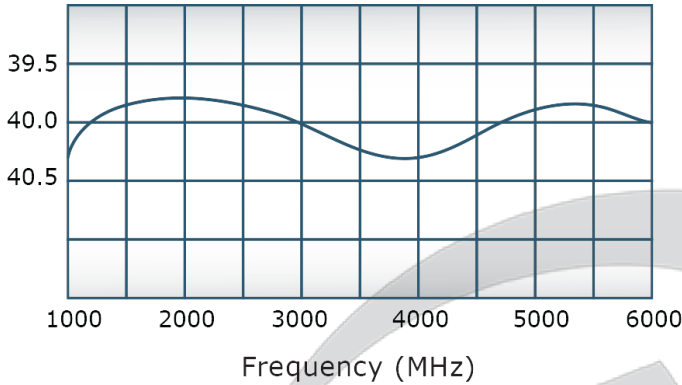


VSWR:

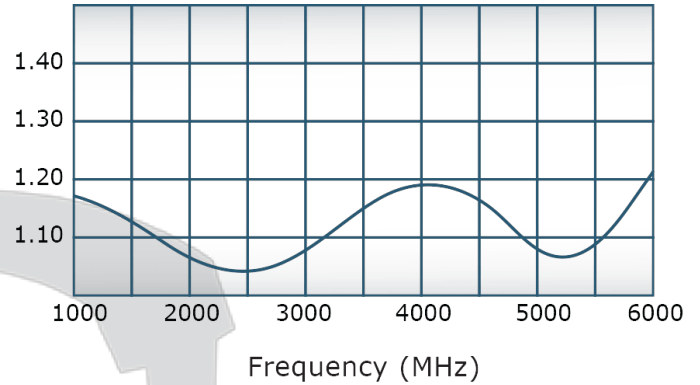

Insertion Loss:

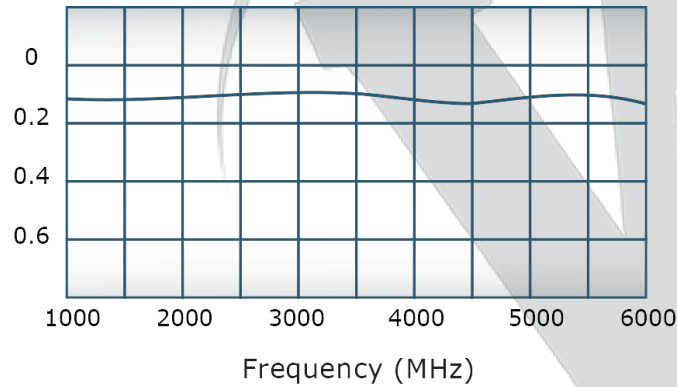

Directivity:

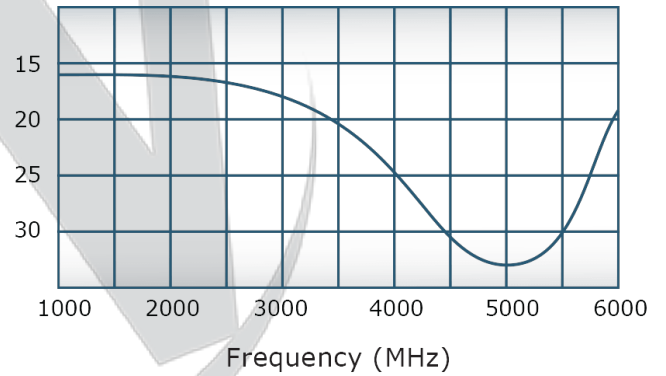




Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of

Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION
 This document contains proprietary information which is the sole property of Werlatone, Inc.

REVISION HISTORY			
REV.	REVISION RECORD	DATE	APPROVED
	PRE-RELEASE		

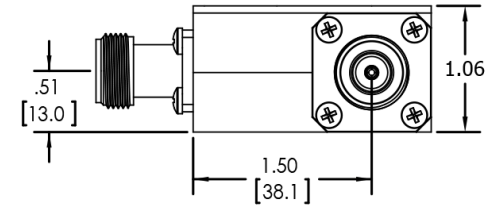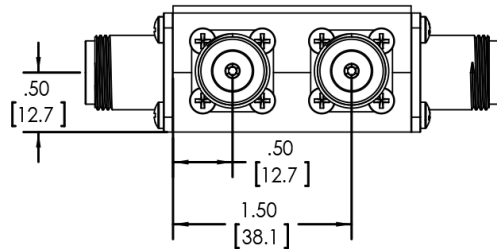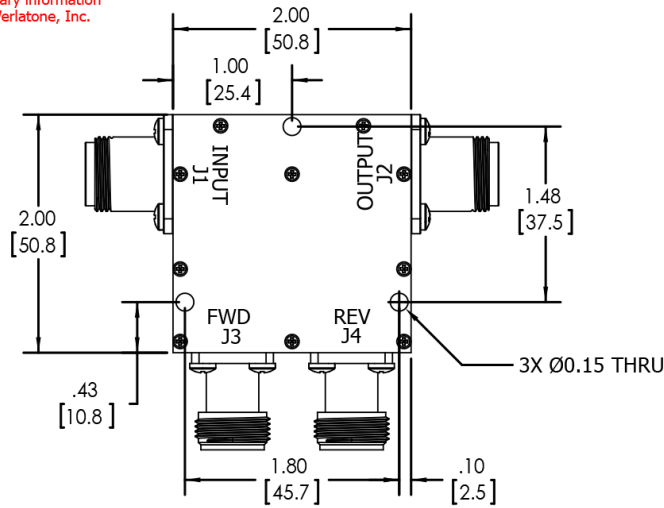

UNLESS OTHERWISE SPECIFIED		DATE	9/30/2014	17 Jon Barrett Rd Patterson, NY 12563
INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5M-2009	DATE	9/30/2014		
PARENTHEetical INFO FOR REF ONLY	DATE	9/30/2014		
DIMENSIONS ARE IN INCHES (mm)	DATE			
DIMENSIONAL LIMITS APPLY BEFORE PROCESSES	DATE			
TOLERANCES:	DATE			
ANGLES ± 2°	DATE			
3 PL ± .005 (.13)	DATE			
2 PL ± .015 (.4)	DATE			
REMOVE ALL BURRS AND SHARP EDGES R.01 MAX	DATE			
CONCENTRICITY MACHINED DIA. .002 FIM	DATE			
MACHINE TOOL HIGHMATCH .003 MAX	DATE			
APPLICATION	THIRD ANGLE PROJECTION	SCALE	1:1	SHEET 1 OF 1

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
 Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com