
PRODUCT DATA SHEET
C11174

4-Port Dual Directional Coupler employs two, 3-Port Uni-Directional Couplers, internally connected, in tandem, providing measurement of both forward and reverse power. Ideal for simultaneously monitoring a system's forward and reverse power and for reflectometer measurements. Unlike the Bi-Directional Coupler, the directivity of the Dual Directional Coupler is unaffected by the loads on the coupled ports.

Features:

High Power Wide Bandwidths Small Size Flat Coupling Custom Designs Available

Electrical Specifications:

Frequency: 700 - 6000 MHz
 Power: 50 W CW
 Coupling: 40 ± 1.0 dB Max.
 Insertion Loss: 0.2 dB Max.
 Flatness: ± 1.0 dB Max.
 VSWR (ML): 1.30:1 Max.
 Directivity: 15 dB Min.

Mechanical Specifications:

Type: Connectorized
 Material: Aluminum 6061-T6
 Surface Finish: Chem. Film Per MIL-DTL-5541F
 Type I Class 3 (Yellow Iridite)
 RoHS Compliant Available
 Operating Temperature: -55°C to +75°C
 Storage Temperature: -60°C to +85°C
 Humidity: 95% Non-Condensing
 Size: 2.0 x 2.0 x 1.06"


Connector Configurations:

| Model | Input (J1) | Output (J2) | Fwd (J3) | Rev (J4) |
|------------|------------|-------------|----------|----------|
| C11174-10 | N Female | N Female | N Female | N Female |
| C11174-12 | N Female | N Female | SMA | SMA |
| C11174-610 | N Female | N Male | N Female | N Female |
| C11174-612 | N Female | N Male | SMA | SMA |
| C11174-714 | N Male | N Female | N Female | N Female |

Werlatone® Broadband Dual, Uni, and Bi Directional RF Couplers are designed to tolerate the most stringent operating conditions associated with military and EMC testing environments. Many of our RF Directional Couplers, designated Mismatch Tolerant®, will operate continuously, at rated power, into a severe load mismatch condition. Our multi-octave Directional Couplers maintain exceptional coupling flatness, directivity, VSWR, and insertion loss.

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

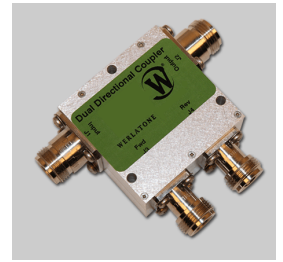

Performance Data (Specifications subject to change without notice):






Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION
 This document contains proprietary information which is the sole property of Werlatone, Inc.

| REVISION HISTORY | | | |
|------------------|-----------------|------|----------|
| REV. | REVISION RECORD | DATE | APPROVED |
| | PRE-RELEASE | | |

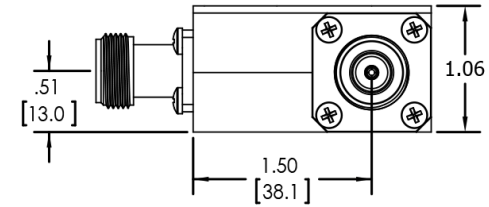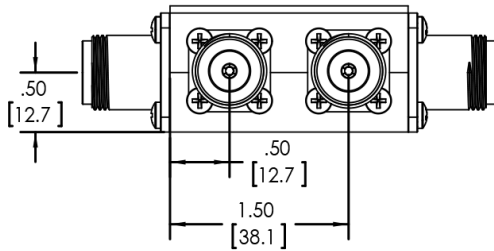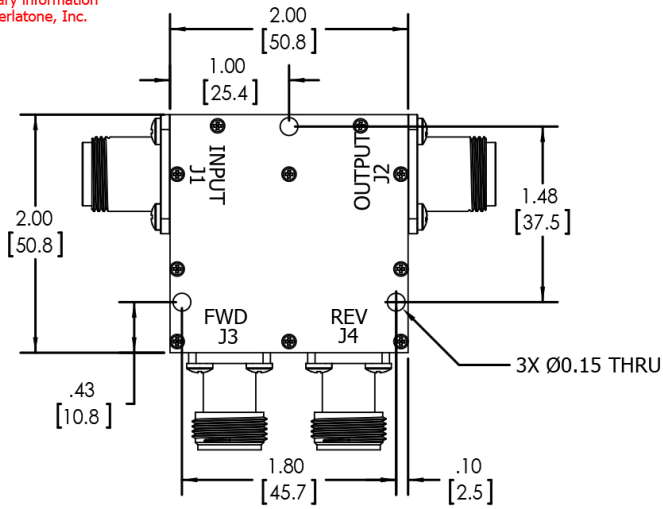

| | | | | | |
|----------------------------|------|------------------------|-----------|-----------|--------------|
| UNLESS OTHERWISE SPECIFIED | | DATE | DATE | DATE | DATE |
| OWN | SC | 9/30/2014 | 9/30/2014 | 9/30/2014 | 9/30/2014 |
| CHK | CS | 9/30/2014 | 9/30/2014 | 9/30/2014 | 9/30/2014 |
| ENGR | DATE | | | | |
| MPGR | BW | 9/30/2014 | | | |
| QA | DATE | | | | |
| RELE | DATE | | | | |
| APPLICATION | | THIRD ANGLE PROJECTION | SCALE | 1:1 | SHEET 1 OF 1 |

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
 Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com