


PRODUCT DATA SHEET
C1449

4-Port Dual Directional Coupler employs two, 3-Port Uni-Directional Couplers, internally connected, in tandem, providing measurement of both forward and reverse power. Ideal for simultaneously monitoring a system's forward and reverse power and for reflectometer measurements. Unlike the Bi-Directional Coupler, the directivity of the Dual Directional Coupler is unaffected by the loads on the coupled ports.

Features:

High Power Wide Bandwidths Small Size Flat Coupling Custom Designs Available

Electrical Specifications:

Frequency: 1 - 100 MHz
Power: 10,000 W CW
Coupling: 70 ± 1.0 dB Max.
Insertion Loss: 0.05 dB Max.
Flatness: ± 0.75 dB Max.
VSWR (ML): 1.10:1 Max.
Directivity: 20 dB Min.

Mechanical Specifications:

Type: Connectorized
Material: Aluminum 6061-T6
Surface Finish: Chem. Film Per MIL-DTL-5541F
Type I Class 3 (Yellow Iridite)
RoHS Compliant Available
Operating Temperature: -55°C to +75°C
Storage Temperature: -60°C to +85°C
Humidity: 95% Non-Condensing
Size: 6.0 x 3.0 x 2.24"

Connector Configurations:

| Model | Input (J1) | Output (J2) | Fwd (J3) | Rev (J4) |
|------------|-------------|-------------|----------|----------|
| C1449-20 | 7/16 Female | 7/16 Female | N Female | N Female |
| C1449-22 | 7/16 Female | 7/16 Female | SMA | SMA |
| C1449-23 | 7/16 Female | 7/16 Female | BNC | BNC |
| C1449-30 | LC Female | LC Female | N Female | N Female |
| C1449-33 | LC Female | LC Female | BNC | BNC |
| C1449-63 | HN Female | HN Female | SMA | SMA |
| C1449-64 | HN Female | HN Female | BNC | BNC |
| C1449-503 | SQS Female | SQS Female | BNC | BNC |
| C1449-728 | 7/16 Male | 7/16 Female | SMA | SMA |
| C1449-754 | HN Female | HN Male | SMA | SMA |
| C1449-QC-2 | QC Block | QC Block | SMA | SMA |



WERLATONE

Model C1449




PRODUCT DATA SHEET


C1449

Performance Data (Specifications subject to change without notice):


Coupling:

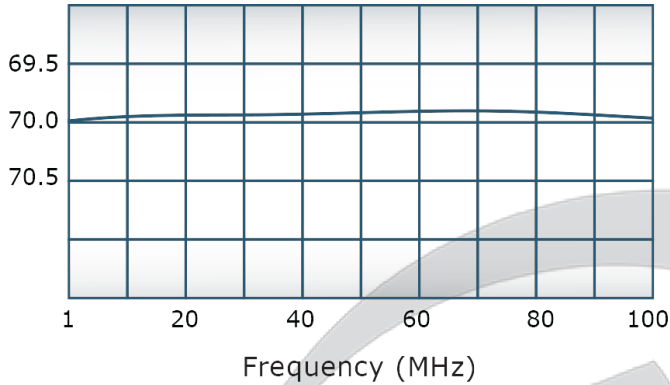


VSWR:

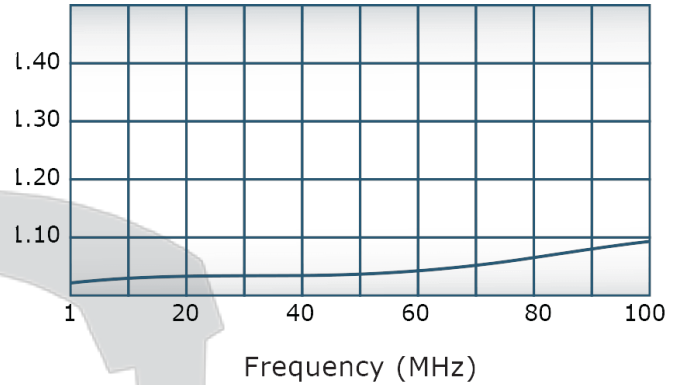

Insertion Loss:

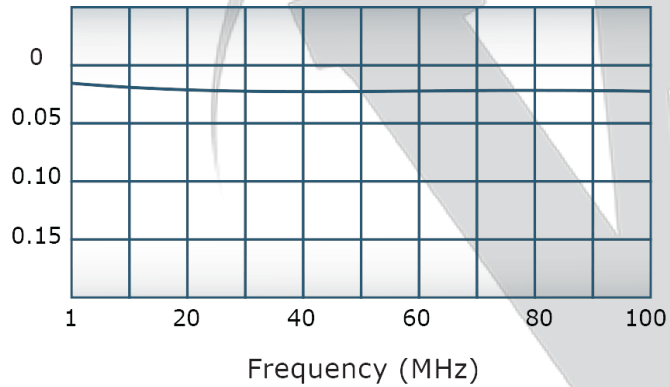

Directivity:

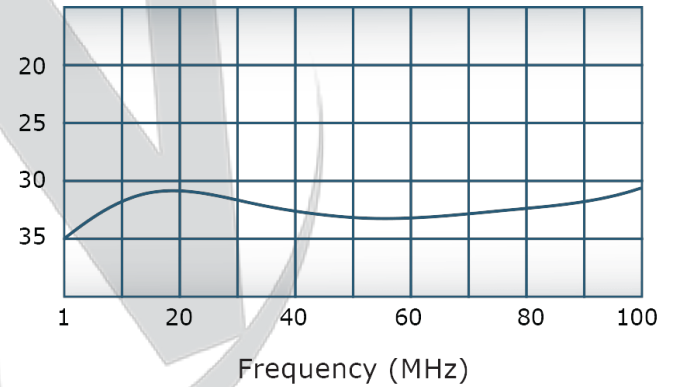


Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION
This document contains proprietary information which is the sole property of Werlatone, Inc.

| REVISION HISTORY | | | |
|------------------|-----------------|------------|----------|
| REV. | REVISION RECORD | DATE | APPROVED |
| - | INITIAL RELEASE | 10/29/2018 | CS |

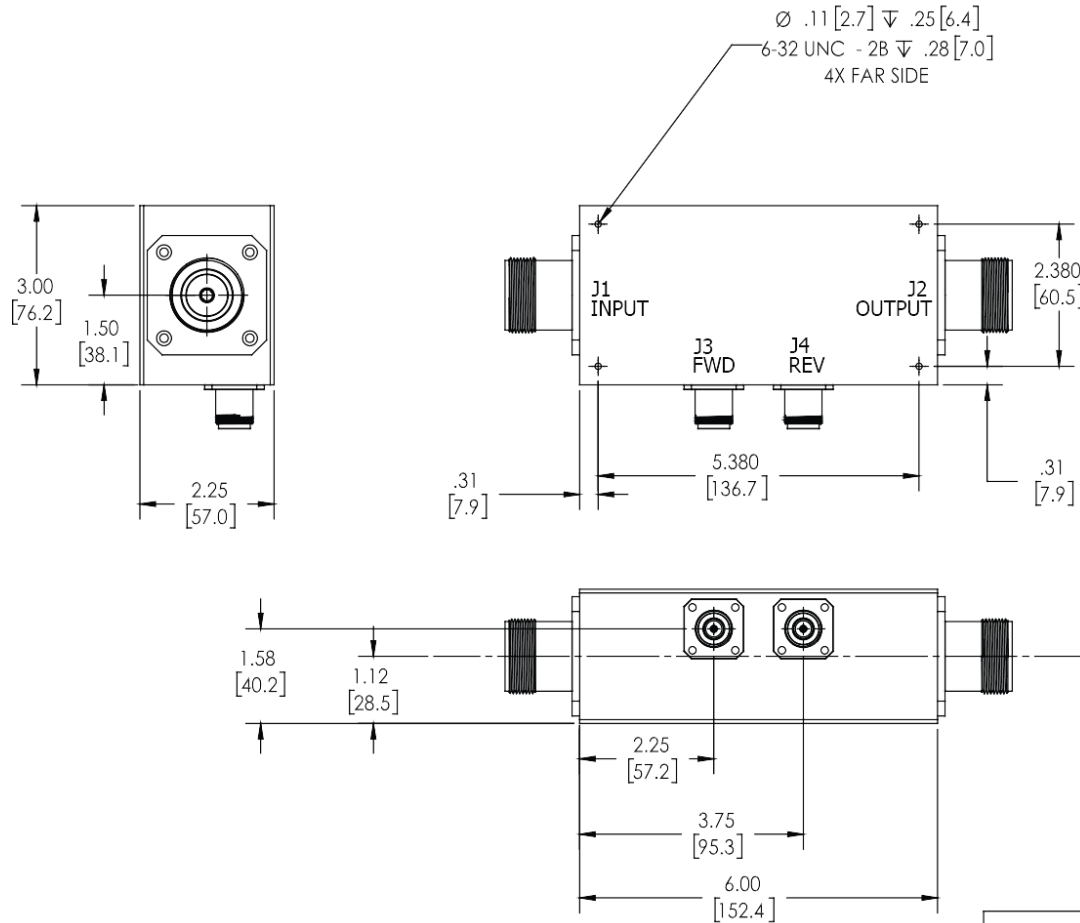

| | | | | | |
|-------------------------------------|--|------------------------|------------|--|--|
| UNLESS OTHERWISE SPECIFIED | | OWN | DATE | 17 Jon Barrett Rd Patterson, NY 12563 | |
| • INTERPRET DRAWING JAW MIL-STD-100 | | PLP | 10/25/2018 | WERLATONE SINCE 1965 | |
| • DIMENSIONING PER ASME Y14.3M-2009 | | CHK | DATE | TITLE | |
| • DIMENSIONAL UNITS: INCHES (mm) | | CS | 10/29/2018 | SIZE | |
| • DIMENSIONAL UNITS: INCHES (mm) | | ENGR | DATE | CAGE CODE | |
| • DIMENSIONAL UNITS: INCHES (mm) | | INFR | DATE | DWG NO | |
| • DIMENSIONAL UNITS: INCHES (mm) | | QA | DATE | REV | |
| • DIMENSIONAL UNITS: INCHES (mm) | | RLSE | DATE | SCALE | |
| • DIMENSIONAL UNITS: INCHES (mm) | | THIRD ANGLE PROJECTION | | SHEET 1 OF 1 | |
| • DIMENSIONAL UNITS: INCHES (mm) | | APPLICATION | | 1:2 | |
| • DIMENSIONAL UNITS: INCHES (mm) | | NEXT ASSY | | 10396-500 | |
| • DIMENSIONAL UNITS: INCHES (mm) | | USED ON | | 1 | |

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com