


PRODUCT DATA SHEET
C6473

4-Port Dual Directional Coupler employs two, 3-Port Uni-Directional Couplers, internally connected, in tandem, providing measurement of both forward and reverse power. Ideal for simultaneously monitoring a system's forward and reverse power and for reflectometer measurements. Unlike the Bi-Directional Coupler, the directivity of the Dual Directional Coupler is unaffected by the loads on the coupled ports.

Features:

High Power Wide Bandwidths Small Size Flat Coupling Custom Designs Available

Electrical Specifications:

Frequency: 500 - 1000 MHz
 Power: 1500 W CW
 Coupling: 40 ± 1.0 dB Max.
 Insertion Loss: 0.2 dB Max.
 Flatness: ± 0.25 dB Max.
 VSWR (ML): 1.15:1 Max.
 Directivity: 20 dB Min.


Mechanical Specifications:

Type: Connectorized
 Material: Aluminum 6061-T6
 Surface Finish: Chem. Film Per MIL-DTL-5541F
 Type I Class 3 (Yellow Iridite)
 RoHS Compliant Available
 Operating Temperature: -55°C to +75°C
 Storage Temperature: -60°C to +85°C
 Humidity: 95% Non-Condensing
 Size: 3.0 x 3.0 x 1.59"

Connector Configurations:

Model	Input (J1)	Output (J2)	Fwd (J3)	Rev (J4)
C6473-10*	N Female	N Female	N Female	N Female
C6473-12*	N Female	N Female	SMA	SMA
C6473-13*	N Female	N Female	BNC	BNC
C6473-20	7/16 Female	7/16 Female	N Female	N Female
C6473-22	7/16 Female	7/16 Female	SMA	SMA
C6473-23	7/16 Female	7/16 Female	BNC	BNC
C6473-43*	SC Female	SC Female	SMA	SMA
C6473-627	7/16 Female	7/16 Male	N Female	N Female
C6473-727	7/16 Male	7/16 Female	N Female	N Female
C6473-728	7/16 Male	7/16 Female	SMA	SMA

*Starred options are 3.0 x 3.0 x 1.09"

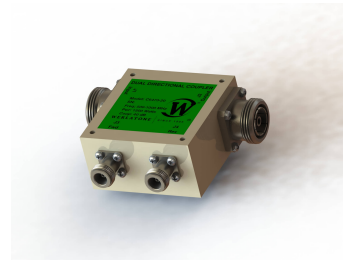


PRODUCT DATA SHEET


C6473

Performance Data (Specifications subject to change without notice):


Coupling:

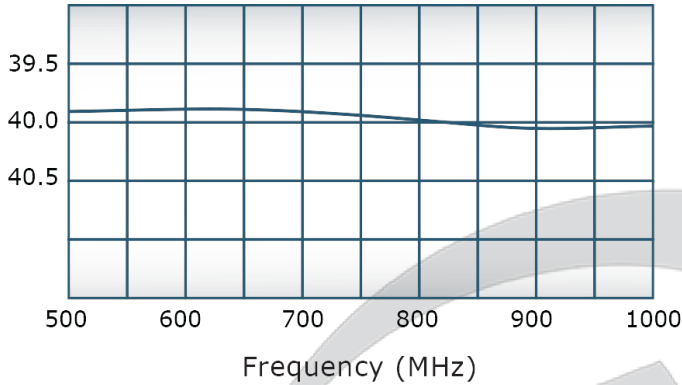


VSWR:

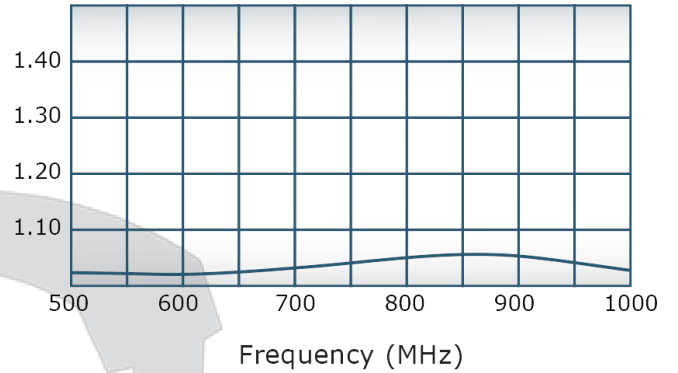

Insertion Loss:

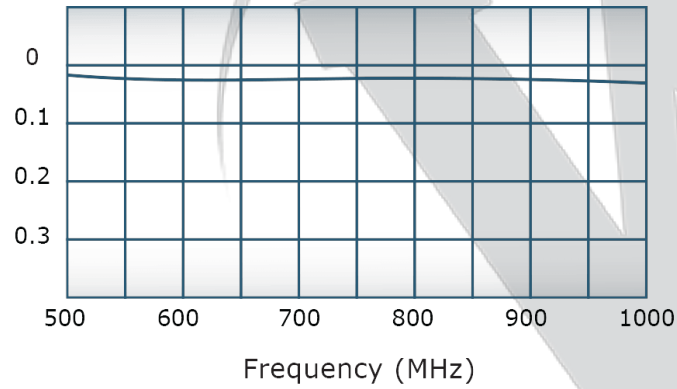

Directivity:

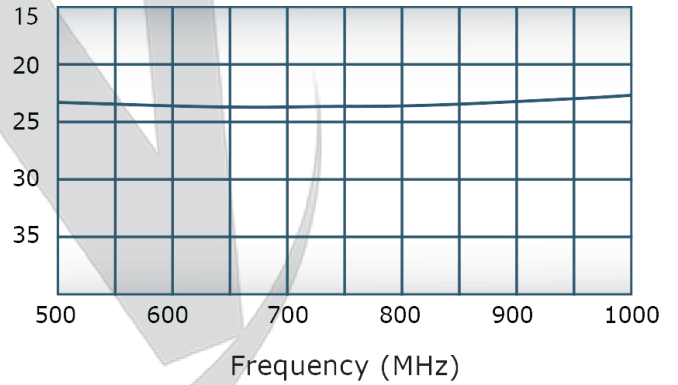

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of

Werlatone, Inc.


Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION
 This document contains proprietary information which is the sole property of Werlatone, Inc.

REVISION HISTORY			
REV.	REVISION RECORD	DATE	APPROVED
A	ECN 9696	5/13/2019	RB

NOTES: UNLESS OTHERWISE SPECIFIED

- MATERIAL: ALUMINUM 6061-T6**
- FINISH: CHEM FILM PER MIL-DTL-5541F CLASS I TYPE 3 (YELLOW IRIDITE)**
- CONNECTORS:
 J1, J2: 7/16 FEMALE
 J3, J4: N FEMALE**

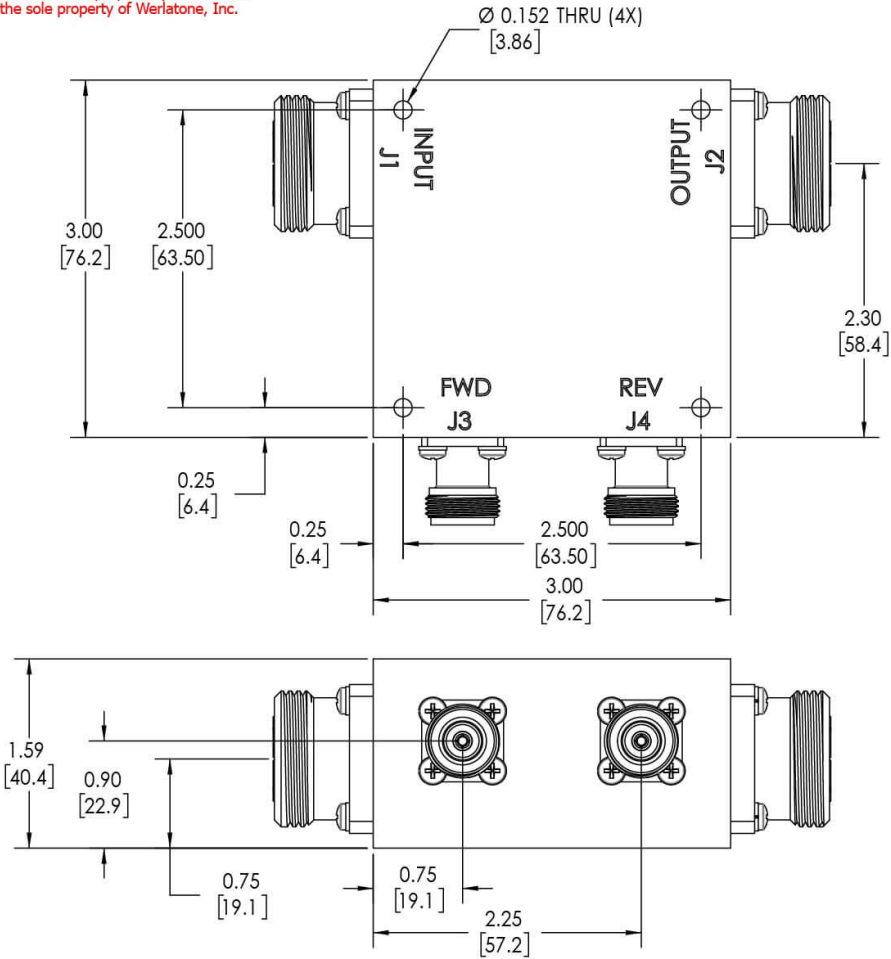

UNLESS OTHERWISE SPECIFIED		DWN	DATE	17 Jon Barrett Rd Patterson, NY 12563
INTERPRET DRAWING IAW MIL-STD-100		SD	5/13/2019	W WERLATONE SINCE 1965
DIMENSIONS PER ASME Y14.5M-2009		CHK	DATE	
PARENTHEetical INFO FOR REF ONLY		CS	5/13/2019	TITLE
DIMENSIONS ARE IN INCHES		ENGR	DATE	OUTLINE
DIMENSIONAL LINES APPLY BEFORE PROCESSES		INFR	DATE	SIZE CAGE CODE DWG NO
TOLERANCES:		QA	DATE	B 10443-501
ANGLES ± 2°		RLSE	DATE	REV A
3 PL ± .005 [13]				SCALE 1:1
2 PL ± .015 [38]				SHEET 1 OF 1
REMOVE ALL BURRS AND SHARP EDGES R.01 MAX				
CONCENTRICITY MACHINED DIA: .002 FIM				
MACHINE TOOL MISMATCH .003 MAX				

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
 Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com