

PRODUCT DATA SHEET C7126

4-Port Bi-Directional Coupler: Similar to the 3-Port Uni-Directional Coupler, except that both ends of the coupled line serve as coupled ports. Convenient for simultaneously monitoring both forward and reverse power. The directivity of this coupler design is, however, dependent upon well matched 50 Ohm loads on the coupled ports.

Features:

High Power Wide Bandwidths Small Size Flat Coupling Custom Designs Available

Electrical Specifications:

Frequency: 100 - 1000 MHz

Power: 200 W CW, 2 kW Peak Coupling: $10 \pm 1.0 \text{ dB Max}$. Insertion Loss: 0.3 dB Max.

Flatness: ± 1.0 dB Max. VSWR (ML): 1.20:1 Max. Directivity: 20 dB Min.

Mechanical Specifications:

Type: Connectorized Material: Aluminum 6061-T6

Surface Finish: Chem. Film Per MIL-DTL-5541F

Type I Class 3 (Yellow Iridite)
RoHS Compliant Available

Operating Temperature: -55°C to +75°C
Storage Temperature: -60°C to +85°C
Humidity: 95% Non-Condensing
Size: 6.4 x 2.7 x 0.75"

Weight: 1.25 lbs.

Port Configurations:

Model	Input (J1)	Output (J2)	Fwd (J3)	Rev (J4)
C7126-10	N Female	N Female	N Female	N Female
C7126-12	N Female	N Female	SMA	SMA
C7126-102	SMA	SMA	SMA	SMA

Werlatone® Broadband Dual, Uni, and Bi Directional RF Couplers are designed to tolerate the most stringent operating conditions associated with military and EMC testing environments. Many of our RF Directional Couplers, designated Mismatch Tolerant®, will operate continuously, at rated power, into a severe load mismatch condition. Our multi-octave Directional Couplers maintain exceptional coupling flatness, directivity, VSWR, and insertion loss.


Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.





PRODUCT DATA SHEET C7126

Performance Data (Specifications subject to change without notice):

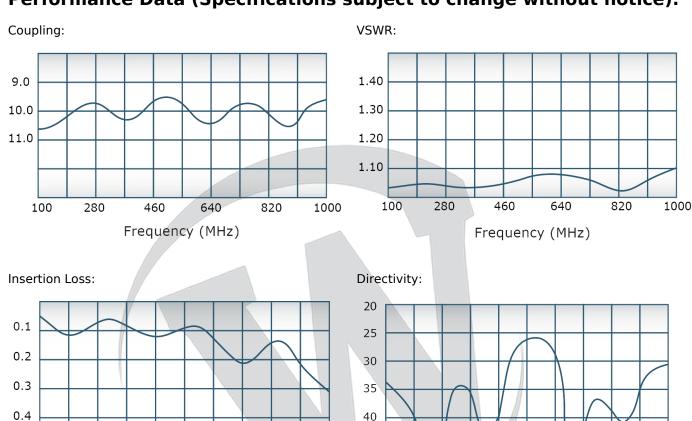

40

1000

100

280

460

Frequency (MHz)

640

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

280

100

640


Frequency (MHz)

460

820

1000

820

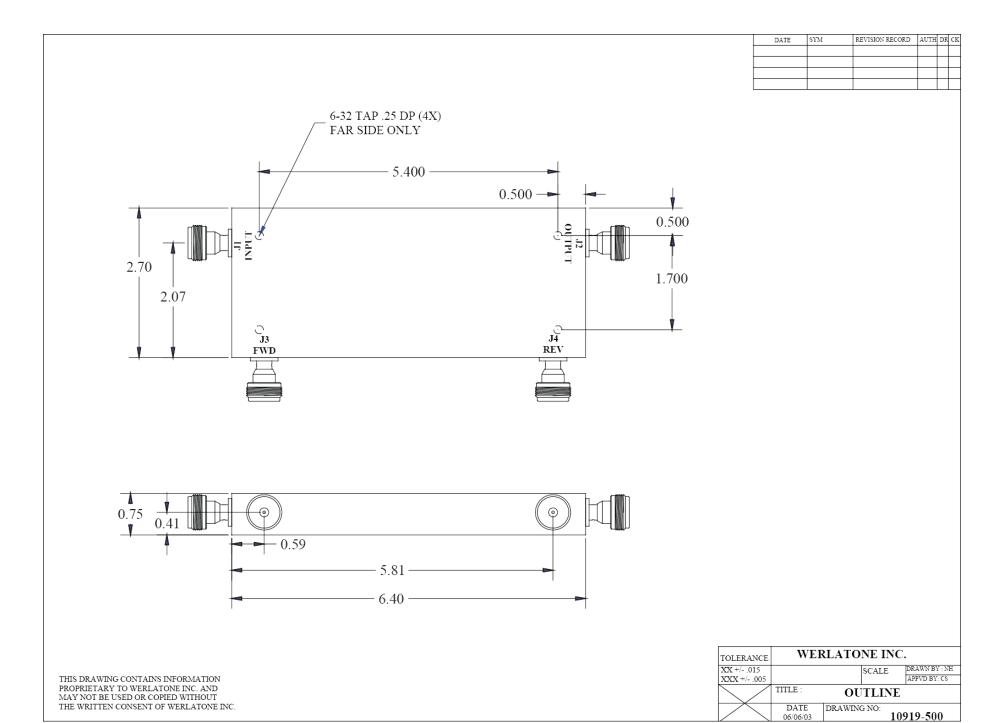

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com